MIL-D-45502B

26 June 1973
SUPERSEDING
MIL-D-45502A
5 June 1964

MILITARY SPECIFICATION

DRIVE, ELECTRIC, M7

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 This specification covers one type of electric drive for the Gun, 20mm, Automatic: M61 and M61A1. The drive consists of a 474-cycle) 208 volt, dual wound rotor, 3-phase alternating current motor equipped with an integral, normally applied 28 volt direct current brake and associated gearing.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military		
MIL-W-13855	-	Weapons; Small Arms and Aircraft Armament Subsystems General Specification For.
MIL-P-14232	-	Parts, Equipment and Tools For Army Materiel, Packaging and Packing of.
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition Of.

FSC 1005

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

STANDARDS

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109	Quality Assurance Terms and Definitions.
ML-STD-810	Environmental Test Methods.

DRAWINGS

U.S. Army Weapons Command

F7269497	-	Drive, Electric, M7.
IEL7269497	-	Inspection Equipment List.

(Part Drawings referenced in this specification form a part of Drawing F7269497; inspection equipment drawings form a part IEL7269497.)

PUBLICATIONS

U.S. Army Weapons command

P7269497	.	Packaging Data Sheet for Drive, Electric, M7.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 First article. Requirements for submission of first article shall be as specified in the contract (see 6.1). Unless otherwise specified (see 6.1), the first article shall include the pilot pack (see 5.1).

3.2 Materials, construction and design. Drives shall conform to the materials, construction and design requirements specified herein, on Drawing F7269497 and in MIL-W-13855.

3.2.l Motor dielectric withstanding voltage. Motors shall withstand 1500 to 1600 volts root mean square (rms) at a frequency of 60 Hertz (Hz) or 1500 to 1600 volts (dq at an ambient temperature between 68° and 86° Fahrenheit (F) without disruptive discharge or deterioration. Testing shall be as specified in 4.5.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T03:16Z
Check the source to verify that this is the currentversion before use.

3.2.2 Brake.

3.2.2.1 Dielectric withstanding voltage. Brake solenoids shall withstand 500 volts (rms) at a frequency of 60 Hz for one (1) minute without disruptive discharge or deterioration. Testing shall be as specified in 4.5.3.4.

3.2.2.2 Insulation resistance. Resistance between each brake solenoid lead to ground, at ambient temperature, shall be within the range of 3 megohms to infinity at 500 volts (dc). Testing shall be as specified in 4.5.3.4.

3.2.2.3 Direct current resistance. Resistance of the brake solenoid circuit shall be within the range of 4.5 to 5.5 ohms. Testing shal be as specified in 4.5.3.4.

3.2.2.4 Operation. The drive shall have the brake normally applied. The brake shall release when the brake lever is actuated manually and it shall return to the applied position by spring action, upon release of the brake lever. The brake shall release when 18 volts (dc) is applied to the brake solenoid circuit and return to the applied position when the brake solenoid is deenergized. The brake solenoid circuit shall withstand 28 ± 3 volts (dc) applied for a period of 15 seconds without damage. Testing shall be as specified in the solenoid circuit tests in 4.5.3.4.

3.3 Performance characteristics.

3.3.1 Environmental.

* 3.3.1.1 Temperature. Drives shall be cpable of operating at high and low temperatures as specified in Method 501, Procedure I (high temperature) and Method 502 (low temperature) of MIL-L-STD-810 except that the high temperature shall be 165°F. Testing shall be as specified in 4.4.

* 3.3.1.2 Humidity. Drives shall be capable of operating after exposure to the humidity requirements specified in Method 507, procedure I of MIL-STD-810. Testing shall be as specified in 4.4.

* 3.3.1.3 Temperature-altitude. Drives shall operate while exposed to conditions specified in Method 504 of MIL-STD-810 simulating an altitude of 60,000 feet (temperature of -65°F and barometric pressure 2.12 inches mercury) while energized with line to neutral voltage of 124 volts. Testing shall be as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

* 3.3.1.4 Dust. Drives shall operate after exposure to sand and dust as specified in method 510 of MIL-STD-810. Testing shall be as specified in 4.4.

* 3.3.1.5 Salt fog. Drives shall operate after exposure to a salt-laden atmosphere as specified In Method 509 of MIL-STD-810. Testing shall be as specified in 4.4.

* 3.3.1.6 Fungus resistance. Drives shall operate after exposure to fungus as specified in Method 508 of MIL-STD-810. Testing shall be as specified in 4.4.

* 3.3.1.7 Vibration. Drives shall withstand a vibration of 80 Hz with the motor turning for 400 duty cycles. A duty cycle shall be defined as time-on for 3 seconds and time-off for 5 seconds. After each series (5 duty cycles), the motor shall be stopped and cooled to ambient temperature. Cleaning and lubrication shall be accomplished after each 2 series. The magnitude and direction of vibration shall be resultant of 0.15 inch total excursion parallel to the drive rotor axis and 0.40 inch total excursion perpendicular to the drive rotor axis. In addition, with the motor stopped, the drive shall withstand vibration of 80 Hz at 0.40 inch total excursion in a direction parallel to the drive rotor axis for a period of one (1) hour. The amplitude of vibration shall be within 10 percent of the specified values. Testing shall be as specified in 4.4.

* 3.3.2 Functioning. Drives shall function when assembled to a slave M61/M61A1 gun or operated under rated load defined in 3.3.2.2 at ambient temperature when supplied the power input specified in 3.3.2.1 without stoppage or unserviceable parts. During a duty cycle (time-on for 2 seconds), drives shall rotate in the direction specified on Drawing F7269497 and accelerate to a minimum or 667 revolutions per minute (rpm) in not more than 0.4 seconds, achieve a steady rate of 667 to 730 rpm and come to a complete stop from the steady state rate in 0.2 to 0.4 seconds. The steady state rate (average drive rpm) shall be calculated using the last 50 percent of the duty cycle, excluding the stoppage time. Testing shall be as specified in 4.5.3.5.

* 3.3.2.1 Power input. Drives shall operate as specified herein when supplied with a steady state line-to-neutral voltage for the three phases (measured at the drive) of 110 to 115 volts and a steady state frequency of 466 to 480 HZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

* 3.3.2.2 Rated load. The rated load shall be a combined drag and inertia load connected to a 96-tooth, 12-pitch load gear. The drag load shall be a load that increases linearaly from 20 ± 10% foot-pounds (ft-lbs) at rest to 107 ft-lbs prior to or at 667 rpm in not more than 0.4 seconds. The inertia of the load shall be 1500 pound-inches squared (lb-in).

* 3.3.3 Endurance. Drives shall be capable of completing 300 duty cycles without functioning failure. A duty cycle shall be defined as time-on for 2 seconds and time-off for 15 seconds with cooling to ambient temperature after each series (5 duty cycles). Cleaning and lubrication shall be accomplished after each 10 series. Testing shall be as specified in 4.5.3.6.

3.4 Interchangeability. Unless otherwise specified on the applicable drawings, all parts shall be interchangeable. (In normal assembly operations there shall be no objections interposed to preferential assembly of parts provided that all parts are dimensionally acceptable.) Testing shall be as specified in 4.5.3.7.

3.5 Marking. Marking of drives shall be in accordance with MIL-W-13855.

3.6 Workmanship. Workmanship shall be in accordance with MIL-W-13855.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

* 4.3 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

* 4.4 First article inspection. A first article shall be selected from early production and submitted for inspection in accordance with the contract (see 6.1). The first article shall be representative of the production processes to be used during quantity production. The first article shall be subjected to the quality conformance inspection specified herein and the vibration test specified in 4.6.2.1.1. In addition, when specified (see 6.1) the first article shall be subjected to the environmental tests specified in 4.6.2.1.

4.5 Quality conformance inspection.

4.5.1 Inspection lot. The formation, size and presentation of inspection lots of drives, parts and packaging shall be in accordance with MIL-STD-105. Inspection lots shall be as large as practicable, in consideration of quality history, manufacturing conditions, contractor's delivery schedule and within the limitations of MIL-W-13855. Endurance test lot size shall be as specified in 4.5.3.6.1.

4.5.2 Examination. Examination of drives and parts shall be performed as specified herein.

* 4.5.2.1 Component parts and concurrent repair parts. Examination of component parts end concurrent repair parts shall be performed in accordance with the criteria specified in the contract (see 6.1). The contractor's examination of these parts shall be accomplished prior to their assembly into the end item or submission for acceptance as repair parts.

4.5.2.2 Drives. Each drive shall be examined as specified below for general quality cleanliness, workmanship, completeness of manufacture and assembly. Drives failing to meet these requirements shall be rejected.

a. Visually and manually examine screws, nuts, bolts and lock wiring for proper assembly and tightness.
b. Visually examine the gear teeth, bearings, pins and unprotected metal surfaces to assure that lubricant has been applied (see Drawing F7269497).
Visually examine for presence of protective coating.
c. Visually and manually examine the identification plate for compliance with drawing requirements.
e. Visually and manually examine the rotation indicator decal to determine correct identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

4.5.2.2.1 Final examination. Final examination of each drive shall be performed after completion of all testing and just prior to preservation and packaging. Drives shall be reexamined as specified in 4.5.2.2. Drives failing to meet the requirements shall be rejected.

4.5.2.2.2 Inspection approval stamp. Drives which have passed all examinations after succesful completion of testing shall be stamped with the Department of Defense complete inspection approval stamp as specified on the applicable drawing. The Government representative will control the stamps used for such stampings to assure successful completion of all required examination and tests.

4.5.3 Testing.

* 4.5.3.1 Failure data. Unless otherwise specified herein, all tests shall be conducted on a complete electric drive. If test requirements cited herein are not met, acceptance of the drive shall be deferred and the contractor shall accomplish as applicable, the following actions:

a. Conduct a failure analysis study performing a dimensional physical and visual examination of the components which are suspected to be the cause of failure or malfunction.
b. Evaluate and correct the applicable production processes and procedures to prevent recurrence of the same defect(s) in future production.
c. Examine drives, partially assembled drives and components (including components and subassemblies at in-process or final assembly) to insure that material containing the same defect is purged from the inventory and not presented to the Government for acceptance.
d. Submit the results of the failure analysis and the corrective actions taken to the Government for review and approval prior to submitting a reconditioned lot or reconditioned drive for retest.

4.5.3.2 Direction of rotation testing. Each drive shall be tested for direction of motor rotation using the test method specified in 4.6.2.2. Drives failing to meet these requirements shall be rejected.

4.5.3.3 Motor dielectric withstanding voltage testing. Each drive shall be tested for motor dielectric withstanding voltage 3.2.1) using the test method specified in 4.6.2.3. Drives failing to meet these requirements shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

4.5.3.4 Brake testing. Each drive shall be tested for brake release and return by manual operation and the brake circuit of each drive electrically tested for brake release (3.2,2.4) using the test method specified in 4.6.2.4. The brake solenoid circuit of each drive shall be tested for dielectric withstanding voltage (3.2.2.1), insulation resistance (3.2.2.2) and direct current resistance (3.2.2.3) using the test methods specified in 4.6.2.4. Drives failing to meet the brake testing requirements shall be rejected.

4.5.3.5 Functioning testing. Each drive shall be tested for functioning (3.3.2) using the test method specified in 4.6.2.5. Drives failing to meet the functioning requirements shall be rejected.

4.5.3.6 Endurance testing.

4.5.3.6.1 Lot size. The initial endurance test lot size shall consist of the initial month's production. Subsequent endurance test lot sizes shall consist of 100 drives.

4.5.3.6.2 Procedure. One drive randomly selected from each endurante lot shall be tested for endurance requirements (3.3.3) using the test method specified in 4.6.2.6. Failure of the drive to meet the requirements shall cause retest or rejection of the represented lot. An endurance retest of 2 drives shall be made from the same lot, unless in the opinion of the Government representative the failure indicates serious defects in the item, in which case retest shall be made only if authorized by the procuring agency. Failure of either drive in the retest to meet the endurance requirements shall cause rejection of the represented lot subject to reconditioning and further testing as a reconditioned lot. Sample size and test methods shall be the same as for the endurance retest.

4.5.3.7 Interchangeability testing.

4.5.3.7.1 In plant.

4.5.3.7.1.1 Drives. A sample of 3 drives randomly selected from each inspection lot be tested for interchangeability (3.4) using the test method specified in 4.6.2.7.1.1. Drives taken for interchangeability testing shall have been found satisfactory in all other examinations and tests. Test frequency may be reduced to not less than one test of 3 drives each month when a record of consistently satisfactory results has been established. The 3 drives shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

comply with the functioning requirements (3.3.2) before and after interchange of parts. Hand refinement of parts will be allowed on not more than one drive during interchange of parts provided that no part is altered beyond drawing requirements. No malfunctions shall be allowed in the functioning tests. Failure of drives in the interchangeability test shall cause retest or rejection of the represented lot. At the discretion of the Government representative, an interchangeability retest may be allowed without reconditioning the lot. Failure during the retest shall cause rejection of the represented lot subject to reconditioning and further test as a reconditioned lot. A sample of 6 drives from each retest or reconditioned lot shall be tested using the same procedure described above.

4.5.3.7.1.2 Concurrent repair parts. At least 2 parts from each Inspection lot of concurrent repair parts shall be subjected to the interchangeability test specified in 4.6.2.7.1.2. Failure of any part to meet the interchangeability requirements shall be cause for rejection of the represented lot, subject to reconditioning and further test as a reconditioned lot. A sample consisting of double the number of parts used in the original test shall be tested from each reconditioned lot using the test method specified above.

4.5.3.7.2 Interplant. When drives are manufactured concurrently by more than one contractor, each contractor shall forward 3 drives monthly for the interplant interchangeability test specified in 4.6.2.7.2 (see 6.1). The contractor will be informed of any failure of the drives to meet the interchangeability requirement (3.4). Upon completion of inspection by the testing agency, drives may be commercially packaged and returned to the contractor for repackaging, at the contractor's expense, in accordance with procurement documents.

* 4.5.3.8 Certification. Unless otherwise specified, the contractor shall be responsible for testing necessary to accomplish certification. For each inspection lot of drives, the contractor shall provide the Government representative with certification of compliance with applicable drawings and specifications.

4.5.3.9 Component parts and concurrent repair parts testing. Raw material testing, part testing and certification shall be performed in accordance with-the criteria specified in the contract (see 6.1). This will include chemical analysis and physical test of materials, tests of protective finish, heat treatment, bonding, and functioning of parts as applicable. The contractor shall accomplish these tests prior to assembly into the end item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

4.5.4 Packaging examination and testing. Unless otherwise specified (see 6.1), the packaging examination and testing shall be in accordance with MIL-P-14232.

4.5.5 Inspection equipment.

4.5.5.1 Acquisition, maintenance and disposition. Unless otherwise specified, (see 6.1), responsibility for acquisition, maintenance, and disposition of acceptance and test equipment prescribed on the List of Inspection Equipment IEL7269497 and for all other inspection equipment required to perform inspection prescribed by applicable specifications, shall be in accordance with MIL-I-45607.

4.5.5.2 Accuracy of standard measuring equipment. When commercial and modified commercial inspection and test equipment is used, it must be capable of repetitive measurements to an accuracy of 10 percent of the total tolerance of the characteristic being inspected.

4.6 Test methods.

4.6.1 Test conditions.

4.6.1.1 Power supply. Drives shall be tested using a power supply meeting the power input specified in 3.3.2.1. Voltage recovery characteristics of the (ac) power supplied to the drive motor shall not be less than the valves defined in Figure 1. Contractor designed, Government approved power supply and control equipment shall be used for applying power to the drive.

4.6.1.2 Rated load. The rated load shall be as specified in 3.3.2.2.

4.6.2 Tests.

* 4.6.2.1 Environmental tests. Drives shall be subjected to the environmental tests specified in MIL-STD-810 to determine compliance with the requirements of 3.3.1.1 thru 3.3.1.6. The drives shall be function tested when the requirements specify that the system shall be operated.

* 4.6.2.1.1 Vibration test. Drives shall be subjected to vibration as specified in 3.3.1.7 for 400 duty cycles without load. While operating as specified, the drive motor shall be vibrated at 80 Hz with a resultant magnitude and direction derived from a .15 inch total displacement parallel to the drive rotor axis and .40 inch total displacement perpendicular to the drive rotor axis. After completion of the 400 duty cycles, the drive

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

(motor stopped) shall be vibrated at 80 Hz and .40 inch total displacement parallel to the drive rotor axis for one hour. Drives shall be mounted to a vibration table using the mounting techniques specified in MIL-STD-810, Method 514.1. The general requirements of MIL-STD-810 shall apply as applicable. Pre-test performance data shall be determined by function testing as specified in 4.6.2.5. After completion of the vibration tests, drives shall be function tested.

4.6.2.2 Direction of rotation test. Drives shall be tested by energizing each stator winding separately, and then energizing both stator windings simultaneously.

4.6.2.3 Motor dielectric withstanding voltage test. Drives shall be tested by applying a high potential voltage between each motor winding connector terminal and frame for a period of 30 seconds. Test voltages shall be free of recurring transients or high peaks. High potential test voltages shall be reduced 15 to 20 percent for-retest of motor windings preciously tested at the voltages specified.

4.6.2.4 Brake tests. Drives shall be tested by application of 18 volts (de) to the brake solenoid connector terminals, and for brake return to the applied position when the brake solenoid is deenergized. The brake circuit shall also be tested by application of 31 volts (dc) to the brake solenoid connector terminals for a period of 15 seconds. At the completion of this test, brake circuits shall be tested for dielectric withstanding voltage, insulation resistance, and direct current resistance in accordance with the applicable drawings. High potential test voltages shall be free of recurring transients or high peaks.

* 4.6.2.5 Functioning test. Drives shall be tested for at least one 2-second duty cycle at ambient temperature using the power supply specified in 4.6.1.1. The drive shall be assembled to a slave M61/M61A1 gun or the load specified in 4.6.1.2 applied. When the drive is tested with a slave gun, belted dummy ammunition and a slave M2A1 feeder shall be used. The booster takeoff assembly shall be loaded to simulate booster takeoff assembly function conditions. The acceleration time, steady state rate and stopping time shall be taken and recorded for each drive.

* 4.6.2.6 Endurance test. Drives shall be tested for 300 duty cycles, in series of 5 duty cycles at ambient temperature, using the power supply specified in 4.6.1.1. The drive shall be assembled to a slave M61/M61A1 gun or the load specified in 4.6.1.2 applied. When the drive is tested with a slave gun, belted dummy ammunition and a slave M2A1 feeder shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

used. The booster takeoff assembly shall be loaded to simulate booster takeoff assembly function conditions. Acceleration time, steady rate rate, and stopping time shall be taken and recorded for the last duty cycle of each fourth series. At the completion of the endurance test, drives shall be disposed of as specified in the contract.

4.6.2.7 Interchangeability test.

4.6.2.7.1 In plant.

4.6.2.7.1.1 Drives. Drives shall be tested by disassembling and then reassembling the parts specified below. Parts shall be disassembled from the drives and identical parts placed together and mixed. Drives shall then be reassembled without selective fitting, except that hand refinement of parts will be allowed on not more than one drive provided that no part is altered beyond drawing requirements. Any commercial part rendered unserviceable by disassembly shall be replaced without penalty to the interchangeability test. The stacking order of the clutch disks (7268776), clutch disk assemblies (7268811), and drive shims (7268672, 7268673 and 7268674) shall not be disturbed during the interchangeability test.

List of Interchangeable parts

Cluster, gear assembly	(7269718)
Cover assembly, brake	(7790388)
Gear, cluster, front	(7268741)
Lever assembly, brake	(7790172)
Retainer, shaft assembly	(7269707)
Shaft Assembly, idler gear	(7793250)
Solenoid, brake	(7268810)
Spacer, gear	(7269706)
Spring, solenoid cover	(7268874)
Support, gear cluster	(7269805)
Washer, thrust	(7269805)

4.6.2.7.1.2 Concurrent repair parts. Concurrent repair parts shall be tested by disassembling 2 drives previously tested in 4.6.2.7.1.1 and then reassembling them using the concurrent repair parts. No hand refinement of parts will be allowed and the assembled drives shall operate and function as intended. This test may be performed indepently of the drive interchangeability testing specified in 4.5.3.7.l.l and at more frequent intervals using accepted drives taken from current production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

4.6.2.7.2 Interplant. Drives to be subjected to the interplant interchangeability test shall be tested for functioning (3.3.2) to assure proper operation before parts are interchanged. The parts listed in 4.6.2.7.1.1 shall then be disassembled from the drives, identified as to manufacturer, and mixed. Drives shall then be reassembled without selective fitting or altering any parts. After assembly, drives shall again be tested for functioning requirements. Before drives are returned to the contractor, the original parts shall be reassembled to their respective drives.

5. PREPARATION FOR DELIVERY

5.1 Pilot pack. The pilot pack shall consist of a complete Drive, Electric, M7 packaged in accordance with Packaging Data Sheet P7269497 for the level of protection specified in the contract (see 6.1), packed level C and forwarded in accordance with 3.1.

* 5.2 Reservation, packaging, packing and marking. Drives shall be preserved, packaged, packed and marked in accordance with Packaging Data Sheet P7269497 for the level of protection specified in the contract (see 6.1.).

* 5.3 Repair parts. Repair parts shall be preserved, packaged, packed and marked in accordance with the Packaging Data Sheet or the requirements, and for the level of protection specified in the contract (see 6.1).

6. NOTES

6.1 Ordering data. Procurement documents should specify:

6.1.1 Procurement requirements.

a. Title, number and date of this specification.
b. Lists of drawings and specifications pertinent to the drive, showing applicable revision dates.
c. Inspection equipment lists pertinent to the drive showing applicable revision dates.
d. Shipping instructions for first article and pilot pack (see 3.1 and 5.1).
e. Criteria for inspection of component parts and concurrent repair parts (see 4.5.2.1 and 4.5.3.9).
f. Shipping instructions for drives when interplant interchangeability test is required (see 4.5.3.7.2).
g. Packaging examination and testing, if different (see 4.5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

h. Responsibilities for acquisition, maintenance, and disposition of acceptance inspection equipment if different (see 4.5.5.1).
i. Selection of applicable levels of preservation, packaging and packing (see 5.2).
j. Packaging instructions for repair parts (see 5.3).

* 6.1.2 Contract data requirements. The requirements for records of examinations and tests and failure analysis data will be listed on a DD Form 1423 incorporated into the contract.

* 6.1.3 Management control systems requirement. When warranted, the contract should specify the application of MIL-Q-9858 or MIL-I-45208 on the Management Control Systems Summary List, DD Form 1660.

* 6.1.4 Unless otherwise specified (see 6.1.1 h), the contract should specify the application of MIL-I-45607 and MIL-C-45662 on the Management Control Systems Summary List, DD Form 1660.

* 6.2 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - WC
Air Force - 84

Review Interest:
Air Force - 84

Preparing Activity:
Army-WC

Project Number:
1005-0435

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

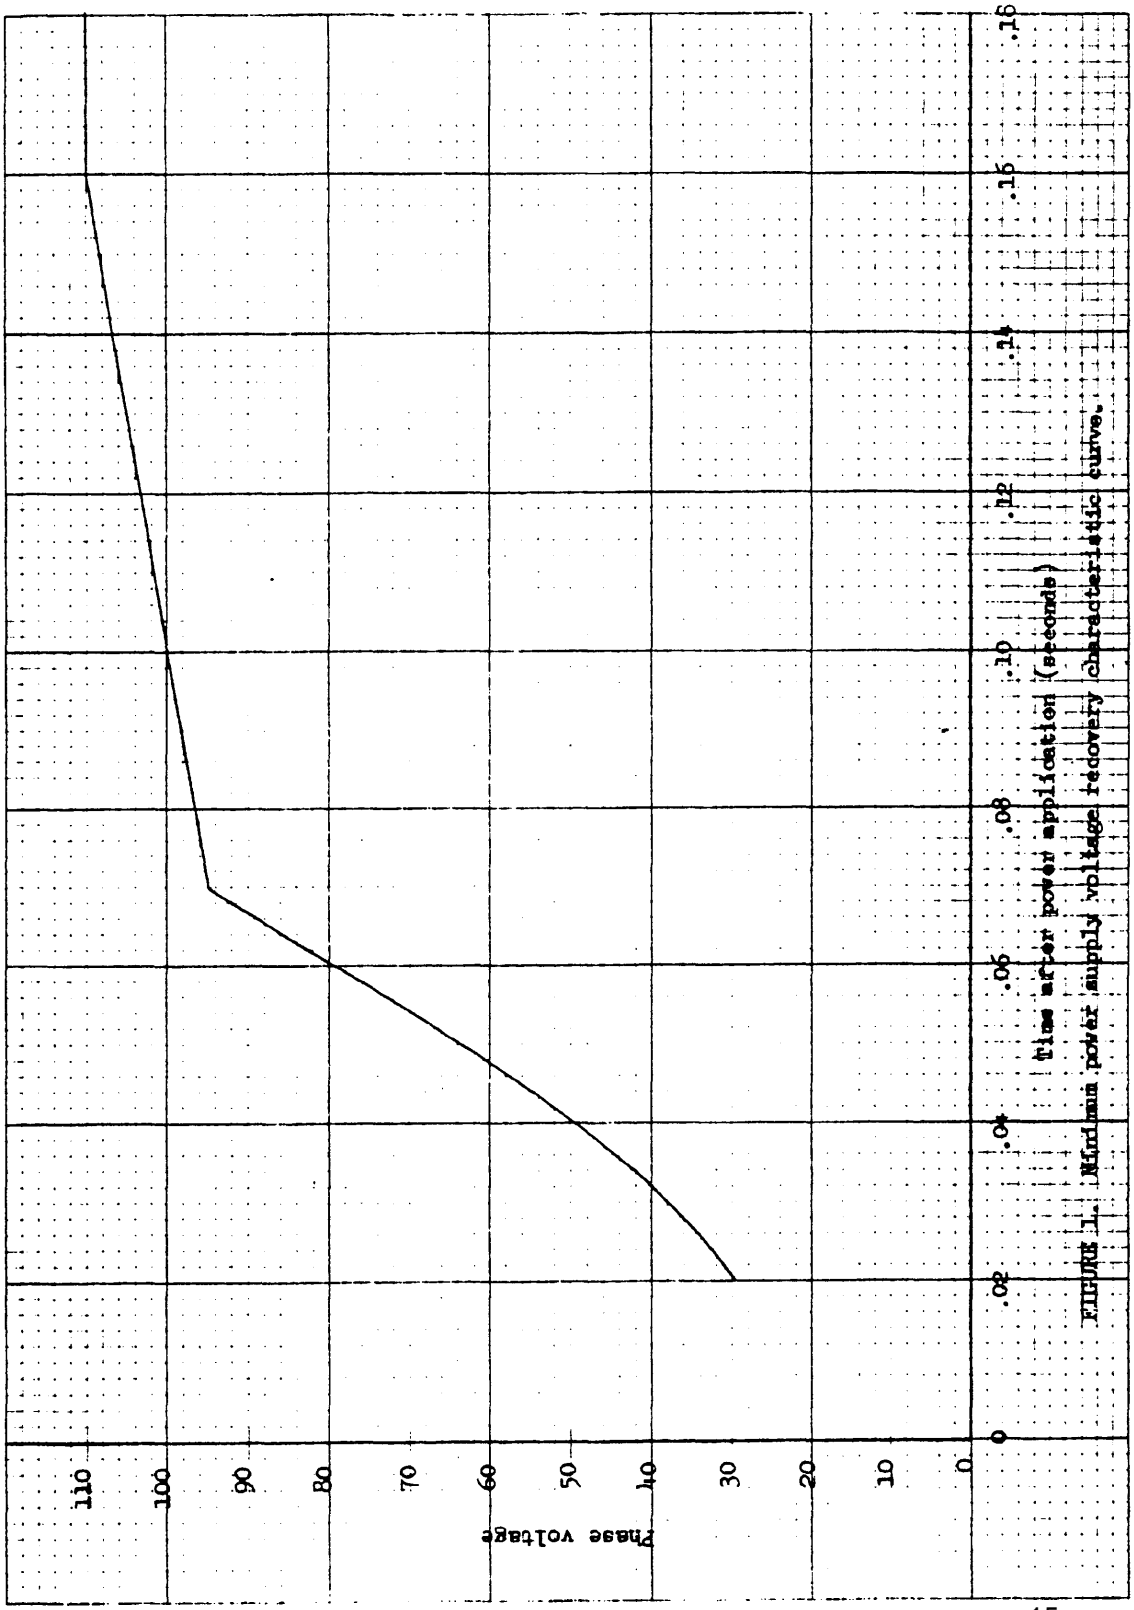


FIGURE 1. Minimum power supply voltage recovery characteristic curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:16Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
HEADQUARTERS
U S ARMY WEAPONS COMMAND
ROCK ISLAND, ILLINOIS 61201

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

[redacted]

Commander
GEN Thomas J Rodman Laboratory
ATTN: SWERR-E-SE
Rock Island, Illinois 61201

FOLD

To detach this form, cut along this line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

MIL-D-45502B
NOTICE 1
28 May 1987

MILITARY SPECIFICATION

DRIVE, ELECTRIC: M7

MIL-D-45502B, dated 26 June 1973, has been reviewed and determined to be valid for use in acquisition.

Custodians:
Army - AR
Air Force - 99

Preparing activity:
Army-AR

FSC 1005

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:16Z
Check the source to verify that this is the current version before use.