MIL-G-3866G
17 June 1987
SUPERSEDING
MIL-G-3866F
21 September 1983

MILITARY SPECIFICATION

GLOVES, CLOTH, COTTON, KNITTED, LIGHTWEIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers lightweight, knitted, cotton gloves.

1.2 Classification. The gloves shall be of the following types and sizes as specified (see 6.2):

Type I - Film Handlers
Type II - Inserts

Schedule of sizes

Small
Medium

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
V-T-276	- Thread, Cotton
DDD-L-20	- Label: For Clothing, Equipage and Tentage, (General Use)
PPP-P-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment, and Equipage: General Specification For

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this document may appear in the sample in which case this document shall govern.

3.2 Material. (See 6.4).

3.2.1 Fabric. The fabric for the gloves shall be a plain (jersey) circular knit fabric made with singles cotton yarn. The finished fabric shall be scoured and bleached. The use of optical bleaches (brighteners) is prohibited. The finished fabric shall conform to the following physical requirements when tested as specified in 4.2.1.1:

a.	Weight per square yard, minimum	-	3.4 ounces
b.	Wales per inch, minimum	-	28
c.	Courses per inch, minimum	-	26
d.	Bursting strength, minimum	-	50 pounds

3.2.1.1 Nonfibrous material content. The total sizing, finishing, and other nonfibrous material content of the finished fabric shall not exceed 2.0 percent when tested as specified in 4.2.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

3.2.2 Thread. The cotton thread for seaming and stitching shall be white and shall conform to type IA2, ticket No. 50, 3 ply and ticket No. 70, 2 ply of V-T-276.

3.3 Label. Each glove shall be marked with a combination identification and size label conforming to type III or IV, class 4 of DDD-L-20, except the size shall be indicated on the bottom line rather than vertically. The label shall withstand fastness to laundering as specified in DDD-L-20.

3.4 Design. The glove shall be an ambidextrous design with an unfinished wrist without cuff as shown on figure 1. Type I gloves shall be inseam constructed and type II gloves shall be outseam constructed.

3.5 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns. The patterns for type I and type II gloves shall be identical. The pattern parts and cutting quantities shall be as specified in table I.

TABLE I. Pattern parts

Parts	Cutting quantity per pair
Back	2
Front	2

3.6 Construction.

3.6.1 Manufacturing operations requirements. The gloves shall be inseam or outseam sewn, as applicable, and shall be made by and with the use of all operations listed in table II. The contractor is not required to follow the exact sequence of operations.

3.6.2 Stitches, seams, and stitchings. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. When two or more methods, seams, or stitches are given for the same part of an operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

3.6.2.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.2.2 Type 301 stitching. Ends of 301 stitching shall be backstitched or overstitched 1/4 inch minimum except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so there will be no loose stitching resulting in a loose bobbin or top thread or no excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the sewn materials.

* 3.6.2.3 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching.

3.6.2.4 Repairs of stitching. Repairs of stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of the stitching.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area and continue a minimum of 1 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements

No.	Requirements	Stitch type	Seam and Stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ looper
1.	Cutting. The gloves shall be cut in accordance with the patterns. There are two parts to each glove, a front and a back. All component parts shall be cut from the same piece of material with the length direction (cuff to fingertip direction) of the part running in the wale direction. NOTE: As an option to cutting the gloves to pattern and then joining the parts, the material to be cut shall be marked with a pattern that is 1/8 to 3/16 inch smaller than the Government pattern (i.e. margin between peripheries of the two patterns is 1/8 to 3/16 inch as measured when smaller pattern is centered on Government pattern). Two layers of the material shall then be joined by sewing along the pattern lines marked on the material while the material is being cut to the glove pattern 1/8 to 3/16 inch from the row of stitching. The stitch type, seam type, stitches per inch, and thread shall be the same as those specified in operation 3.					
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.2.2 shall be removed from production and replaced with non-defective and properly matched components.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and Stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ looper
3.	Joining. Join front to back by stitching 1/8 to 3/16 inch from raw edge.	301	SSa-1	8-10	50-3	50-3
		or				
		401	SSa-1	8-10	50-3	70-2
4.	Labeling. Apply label to inside of type I gloves and the outside of type II gloves. The label shall be centered between side seams of gloves, about 1/2 inch from unfinished edge of wrist.					
5.	Trimming and cleaning. Trim thread ends (unless otherwise specified) and surplus material. Remove all spots, stains, and loose ends.					
6.	Finishing. Turn type I gloves right side out and form or lay off. Type II gloves shall not be turned, but shall be laid out flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

3.7 Measurements. The finished glove shall conform to the measurements specified in table III. The measurements shall be made as indicated on figure 1 except type II gloves shall be measured from stitch line to top of glove and from stitch line to stitch line as applicable.

TABLE III. Measurements of finished gloves

Characteristic	Figure 1	Sizes		Tolerance
		Small	Medium	
Total length (inches)	A	9	9 1/2	±1/4
Hand width (inches)	B	3 1/2	4	±1/4
Width of wrist opening	C	3 1/4	4	±1/4

3.8 Workmanship. The finished gloves shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.2.1.1 Component testing. The finished knitted fabric shall be tested as specified in table IV. The test methods listed in table IV shall be in accordance with FED-STD-191. The lot size shall be expressed in units of yards. The sample unit shall be 1 yard full width of the finished fabric. The number of sample units shall be as shown below. The lot shall be unacceptable if one or more sample units fail to meet any requirement specified in table IV. All test reports shall contain the individual values utilized in expressing the final result.

Lot size (yards)	Sample size (sample units)
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

TABLE IV. Component tests

Component	Characteristic	Requirement reference	Test method
Cotton jersey knit	Material identification	3.2.1	1/
	Type of knit	3.2.1	1/
	Absence of optical bleaches (brighteners)	3.2.1	1/
	Weight per square yard	3.2.1	5041
	Wales and courses per inch	3.2.1	5070
	Bursting strength	3.2.1	5120
	Nonfibrous material	3.2.1.1	2611

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

4.2.2 End item visual examination. The end item shall be examined for the defects listed in table V. The lot size shall be expressed in units of gloves. The sample unit shall be one glove and the selection shall be by pairs. The inspection level shall be I and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for major and minor combined defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects

Examine	Defect	Classification	
		Major	Minor
Pairing	Not properly mated (i.e., not of same size)	X	
Cleanness	Spot or stain		X
	Thread ends not trimmed		X
	Surplus material on seams not evenly trimmed		X
	Rancid or other objectionable odor	X	
Color	Other than bleached white	X	
Cutting	Any component not cut on straight line and not cut with length direction of component in wales direction of fabric	X	
Material and workmanship	Any hole larger than 3/32 inch	X	
	Three or more holes	X	
	Two holes 3/32 inch or less located closer than 3 inches to each other		X
	NOTE: Two holes 3/32 inch or less are not to be scored as a defect if the holes are 3 inches or more apart. All holes shall be measured across opening in longest dimension.		
	Run or dropped stitch	X	
	Any clearly noticeable unevenness of fabric		X
	Needle chews	X	
	Clearly noticeable slubby yarn		X
	Any cut, tear, or burn	X	
	Any mend	X	
Fingers and thumb	Any finger or thumb twisted, pleated, or poorly shaped		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Seams and stitching	Any open seam	X	
	Repair of seam not as specified		X
NOTE:	A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or run-off stitches occur or raw edge is not caught in stitching.		
Raw edge (except on wrist) - type I only	More than 1/4 inch on outside of glove		X
Seam and stitch type	Wrong seam type		X
	Wrong stitch type		X
Construction	Type I glove not inseam sewn		X
	Type II glove not outseam sewn		X
Stitches per inch	Less than six stitches per inch	X	
	Six or seven stitches per inch		X
	More than ten stitches per inch		X
NOTE:	To be scored only when the condition exists on the major portion of a seam.		
Stitch tension	Loose tension resulting in a loosely secured seam	X	
	Tight tension resulting in clearly noticeable puckering along seam (stitches break when normal strain is applied to seam or stitching)	X	
	Loose stitching (401 stitch type)	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Seams and stitching - continued			
Ends of stitching	Ends of stitching produced with 301 stitch type, backtacked less than 1/4 inch		X
Inseam	Stitching less than 1/8 or more than 3/16 inch from edge		X
Label	Missing, incorrect, or illegible	X	
	Misplaced		X

4.2.3 End item dimensional examination. The end item shall be examined for the measurements listed in table III. Any measurement not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of gloves. The sample unit shall be one glove. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.2.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number of bundles per container is more or less than specified Number per bundle is more or less than specified 1/

1/ For this defect one bundle shall be examined from each shipping container in the same sample.

* 4.2.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Twenty pairs of gloves of one size only shall be neatly stacked in a bundle, with every other five pair reversed, and securely tied with cotton tape or twine to form a unit pack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. The gloves shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. One hundred and sixty pairs of gloves of one type and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A unit packs shall be arranged on side, two in length, two in width, and two in depth within a shipping container. Inside dimensions of each container shall be approximately 15 1/2 inches in length, 11 1/2 inches in width, and 7 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. One hundred and sixty pairs of gloves of one type and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A unit packs shall be arranged on side, two in length, two in width, and two in depth within the shipping container. Inside dimensions of each container shall be approximately 15 1/2 inches in length, 11 1/2 inches in width, and 7 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial packing. Gloves, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), gloves, packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 11 in accordance with appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and unitized pallet loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Labels, mixed sizes. Each shipping container packed with mixed sizes, shall have securely attached to the ends and sides, directly under the printing or stenciling, a white paper label 5 by 4 inches, with the words "MIXED NSN's" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and the NSN's contained therein.

6. NOTES

6.1 Intended use. Type I gloves are intended for use in handling film and other similar items. Type II gloves are intended for use as inserts for Glove Set, Chemical Protective, MIL-G-43976.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type and size required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. Type and class of unit load required (see 5.2.1).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

* 6.5 Subject term (key word listing).

Clothing
Gloves
Protective clothing

6.6 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activities:

Navy - MC
Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0555

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

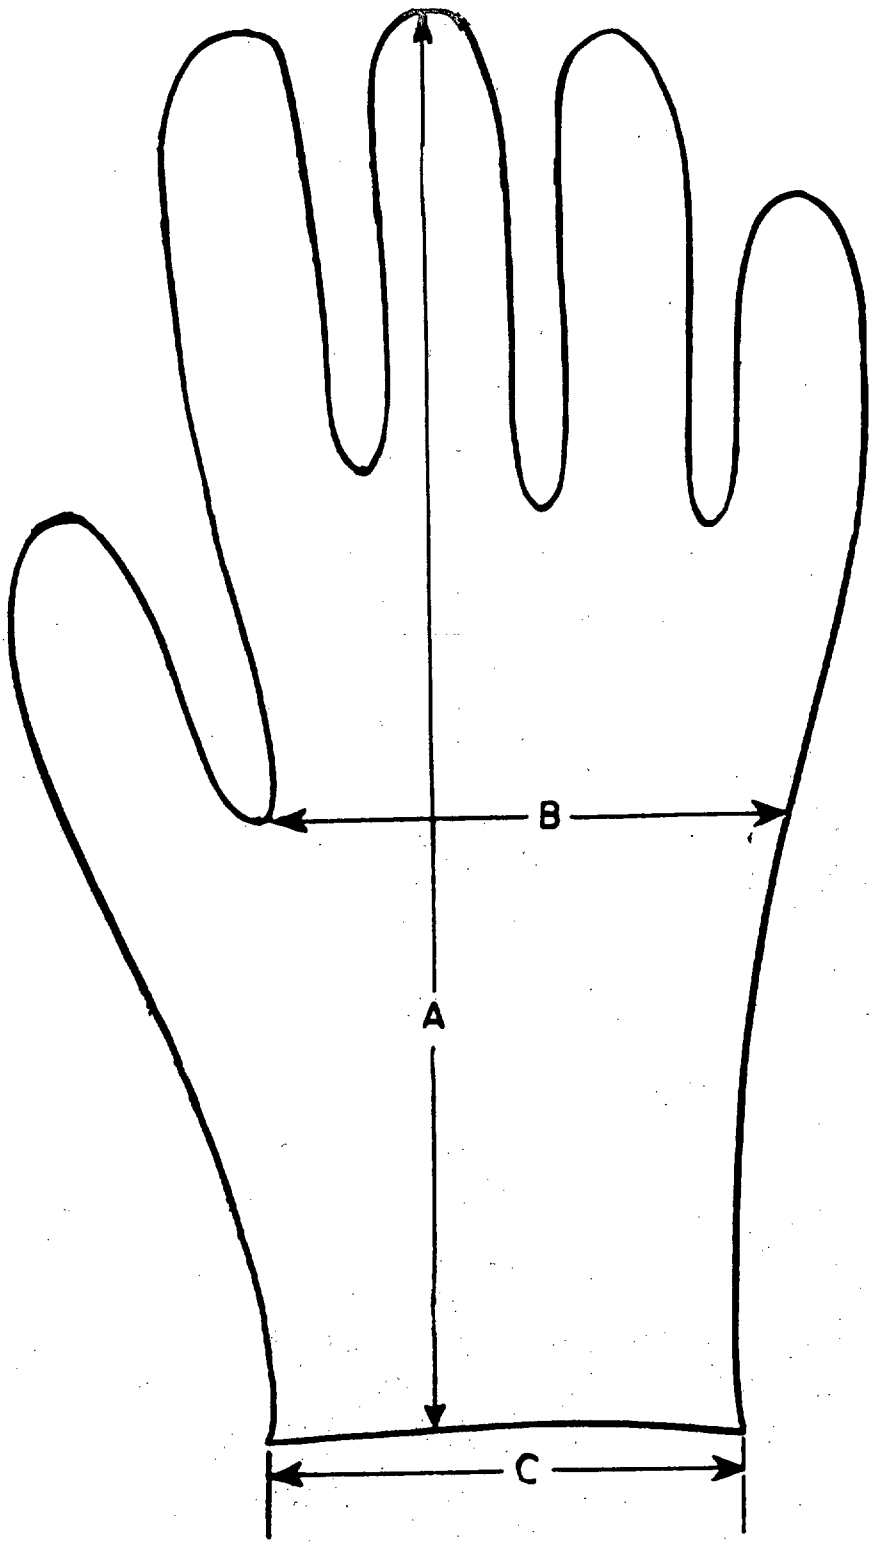


Figure 1. Gloves, Men's, Cloth, Knitted, Lightweight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-G-3866G	Gloves, Cloth, Cotton, Knitted, Lightweight

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:51Z
Check the source to verify that this is the current version before use.