MIL-P-3852C

4 February 1969
SUPERSEDING
MIL-P-3852B
24 September 1965
(see 6.3)

MILITARY SPECIFICATION

PANS, BAKING AND ROASTING; CORROSION-RESISTING STEEL AND CARBON STEEL

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 This specification covers one size of corrosion-resisting steel and carbon steel baking and roasting pan, with wear straps.

* 1.2 Classification.- Baking and roasting pans covered by this specification shall be of the following grades as specified (see 6.2):

* Grade A - Corrosion-resisting steel.
* Grade B - Carbon steel.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-698	- Steel, Sheet and Strip, Low Carbon.
QQ-W-423	- Wire, Steel, Corrosion-Resisting.
QQ-W-461	- Wire, Steel, Carbon, (Round, Bare and Coated).
PPP-B-636	- Box, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing.
PPP-T-60	- Tape, Pressure-Sensitive, Adhesive, Waterproof, For Packaging.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:49Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116 - Preservation, Methods Of.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

DRAWING

Army Natick Laboratories

* 2-9-8 - Pan, Baking and Roasting, Steel.

(Miniature copy of Drawing 2-9-8, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

* Specification A 167-63 - Corrosion-Resisting Chromium-Nickel Steel, Plate, Sheet and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

AMERICAN TRUCKING ASSOCIATIONS, INC.

National Motor Freight Classification Rules

(Application for copies should be addressed to the American Trucking Association, Inc., 1616 P Street, N.W., Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:49Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copiesshould be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill. 60606.)

(Technical society and technical association specifications and standards are generally available from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced a sample pan shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable requirements of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product.- The pans delivered under this specification shall be the manufacturer's current, commercial products except for any changes necessary to comply with this specification.

* 3.3 Materials.- Materials not definitely specified shall be of the quality normally used for the purpose in the manufacturer's current commercial baking and roasting pans.

3.3.1 Carbon steel.-

3.3.1.1 Sheet and strip.- Carbon steel sheet and strip shall conform to quality CRCQ, finish number 1 of QQ-S-698.

3.3.1.2 Wire.- Carbon steel wire shall conform to steel number 1010, 1015, or 1020, finish 1 of QQ-W-461.

* 3.3.2 Corrosion-resisting steel.-

* 3.3.2.1 Sheet and strip.- Corrosion-resisting steel sheet and strip shall conform to type 302 or 304 of ASTM A 167-63.

* 3.3.2.2 Wire.- Corrosion-resisting steel wire shall conform to form 1, composition 302 or 304 of QQ-W-423.

* 3.4 Design and construction.- The pans shall be grade A or B as specified (see 1.2) and shall consist of a pan body, two handles, two handle ears, a rim reinforcing wire and two wear straps. The pans shall conform to the requirements

Source: https://assist.dla.mil -- Downloaded: 20261O-16T21:49Z
Check the source to verify that this is the currentversion before use.

specified herein and on Drawing 2-9-8. The pan body shall be seamless with folded corners and the folded corners shall lay flat against the ends of the pan. The rim reinforcing wire shall be rolled into the top edge of the pan body to form a tight and continuous reinforcing bead around the top rim of the pan. The pan shall not leak when tested as specified in 4.4.1.

* 3.4.1 Grade A pan.- The grade A pan shall be fabricated of the corrosion-resisting steel sheet or strip specified in 3.3.2.1 and the corrosion-resisting steel wire specified in 3.3.2.2. The handle ears and the wear straps shall be joined to the pan body by spot welds.

* 3.4.2 Grade B pans.- The grade B pans shall be fabricated of the carbon steel sheet or strip specified in 3.3.1.1 and the carbon steel wire specified in 3.3.1.2. The handle ears and the wear straps shall be joined to the pan body by rivets.

3.5 Finish.-

* 3.5.1 Grade A.- The grade A pans shall be finished in accordance with the manufacturer's commercial practice.

* 3.5.2 Grade B.- The grade B pans shall have a blue oxide finish in accordance with the manufacturer's standard practice.

* 3.6 Marking.- The manufacturer shall mark his name, trade name, or trademark of such known character easily identifiable with said manufacturer on each pan. Marking shall be applied in accordance with MIL-STD-130.

* 3.7 Workmanship.- The finished pans shall be complete and clean, and free of scratches, dents, breaks, sharp edges, corners, deformities, burns, and slivers.

* 3.7.1 Rivets.- Rivets shall be tight and flush on the inside of the pan. The rivet heads and peened ends shall be round and concentric and shall be in full contact with the joined metal surfaces.

* 3.7.2 Spot welds.- Spot welds shall be sound and free of discoloration, splatter, and burn-through.

* 3.7.3 Blue oxide finish.- The blue oxide finish shall be uniform in color and free of rust, stains, and areas of no coverage.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:49Z
Check the source to verify that this is the current version before use.

facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects listed in table I, dimensions specified, and tested as specified in 4.4.1.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105 except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, standards, and drawings unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.2 End item inspection.- The lot shall consist of all pans of one grade offered for inspection at one time. The sample unit shall be one completely fabricated pan.

4.3.2.1 Visual inspection.- Inspection shall be made of the pans for the defects listed in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

* TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish (grade B only)	Not a blued finish.	X	
	Area of rust.	X	
	Not uniform in color.		X
	Stained.		X
	Areas of no coverage.	X	
Construction and workmanship	Not seamless construction.	X	
	Component missing, or not as specified.	X	
	Corners not folded flat against ends of pan.		X
	Scratches or dents.		X
	Breaks, sharp edges or corners, deformities, burrs, or slivers.	X	
	Rim reinforcing wire loose.	X	

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:49Z
Check the source to verify that this is the current version before use.

* TABLE I.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Welds (grade A only)	Missing, splatter, excessive discoloration, burn-through.	X	
Rivets (grade B only)	Not flush on inside of pan.	X	
	Peened ends not round and concentric.		X
	Rivet heads or peened ends not in full contact with joined metal surfaces.	X	
Marking	Missing, not legible.		X

4.3.2.2 Dimensional inspection.- An inspection shall be made to determine compliance with dimensions specified. Any nonconformance shall be considered a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.3.2.3 Testing of the end item.- The end item shall be tested as specified in 4.4.1. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units. Any nonconformance with specified requirements shall be considered a defect.

4.3.3 Examination of preparation for delivery.- An examination shall be made to determine that preservation and packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The lot shall be the number of shipping containers offered for inspection at one time. The sample unit shall be one container fully prepared for delivery. The inspection level shall be S-2 with an AQL of 6.5 expressed in terms of defects per hundred units.

* TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking (exterior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Preservation	Preservative improperly applied or missing.
Content	Number per carton is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:49Z
Check the source to verify that this is the current version before use.

* 4.3.3.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.4 Tests.-

* 4.4.1 Leak test.- Place the pan on a level dry surface. Fill the pan with water to within 1/4-inch of the top. Allow the water-filled pan to set for 3 hours then examine the pan and dry surface for evidence of leakage to determine compliance with the nonleaking requirement of 3.4.

* 5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

* 5.1.1.1 Grade A pans.- Grade A pans shall be nested in stacks of six, separated by sheets of kraft paper having a minimum basis weight of 30 pounds (24 by 36 - 500). Each stack of pans shall then be completely wrapped with kraft paper specified herein and the wrap secured with tape conforming to type III of PPP-T-45.

* 5.1.1.2 Grade B pans.-

* 5.1.1.2.1 Preservation.- Each grade B pan shall be cleaned process C-1, thoroughly dried and then coated with type P-14 preservative in accordance with MIL-P-116.

* 5.1.1.2.2 Packaging.- Grade B pans shall be nested in stacks of six, separated by sheets of greaseproof barrier-material conforming to type II, grade A, class 2 of MIL-B-121. Each stack of pans shall then be wrapped with greaseproof barrier-material as specified herein, allowing for a 2-inch overlap. Seams and closures shall be secured with tape conforming to type I or II, class 1 of PPP-T-60.

* 5.1.2 Level C.- The pans shall be preserved and packaged to afford adequate protection against corrosion, deterioration, and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing.- Packing shall be level A, B,or C as specified (see 6.2).

* 5.2.1 Level A.- Twelve pans of one grade only, preserved and packaged as specified in 5.1 shall be packed in a snug-fitting shipping container conforming to style RSC, V2s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:49Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B.- Twelve pans of one grade only, preserved and packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF variety optional or type SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), shipping containers shall be V3c or V3s, fabricated and closed in accordance with PPP-B-636. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C.- Pans, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Rules, as applicable.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), pans, packed as specified shall be palletized in accordance with Load Type I of MIL-STD-147. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the patterns of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

* 6.1 Intended use.- The grade B pan covered by this specification is for general use by the Armed Forces for baking and roasting. The grade A pan is intended for use in areas where extreme corrosive conditions prevail.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
*(b) Grade pan required (see 1.2).
(c) First article.- When a preproduction sample is required (see 3.1).
(d) Selection of applicable levels of preservation and packaging and packing (see 5.1 and 5.2).
(e) Whether weather-resistant class fiberboard shipping containers are required for level B shipment (see 5.2.2.1).
(f) When palletization is not required (see 5.3).

* 6.3 Supersession data.- The grade B pan covered by this specification is the same pan covered by superseded specification MIL-P-3852B, dated 24 September 1965. The grade A pan has been added to this specification as a new item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:49Z
Check the source to verify that this is the current version before use.

* 6.4 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - SA
Air Force - 84

User activities:


Navy - MC, MS

Preparing activity:

Army - GL

Project No. 7330-0267

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:49Z
Check the source to verify that this is the current version before use.

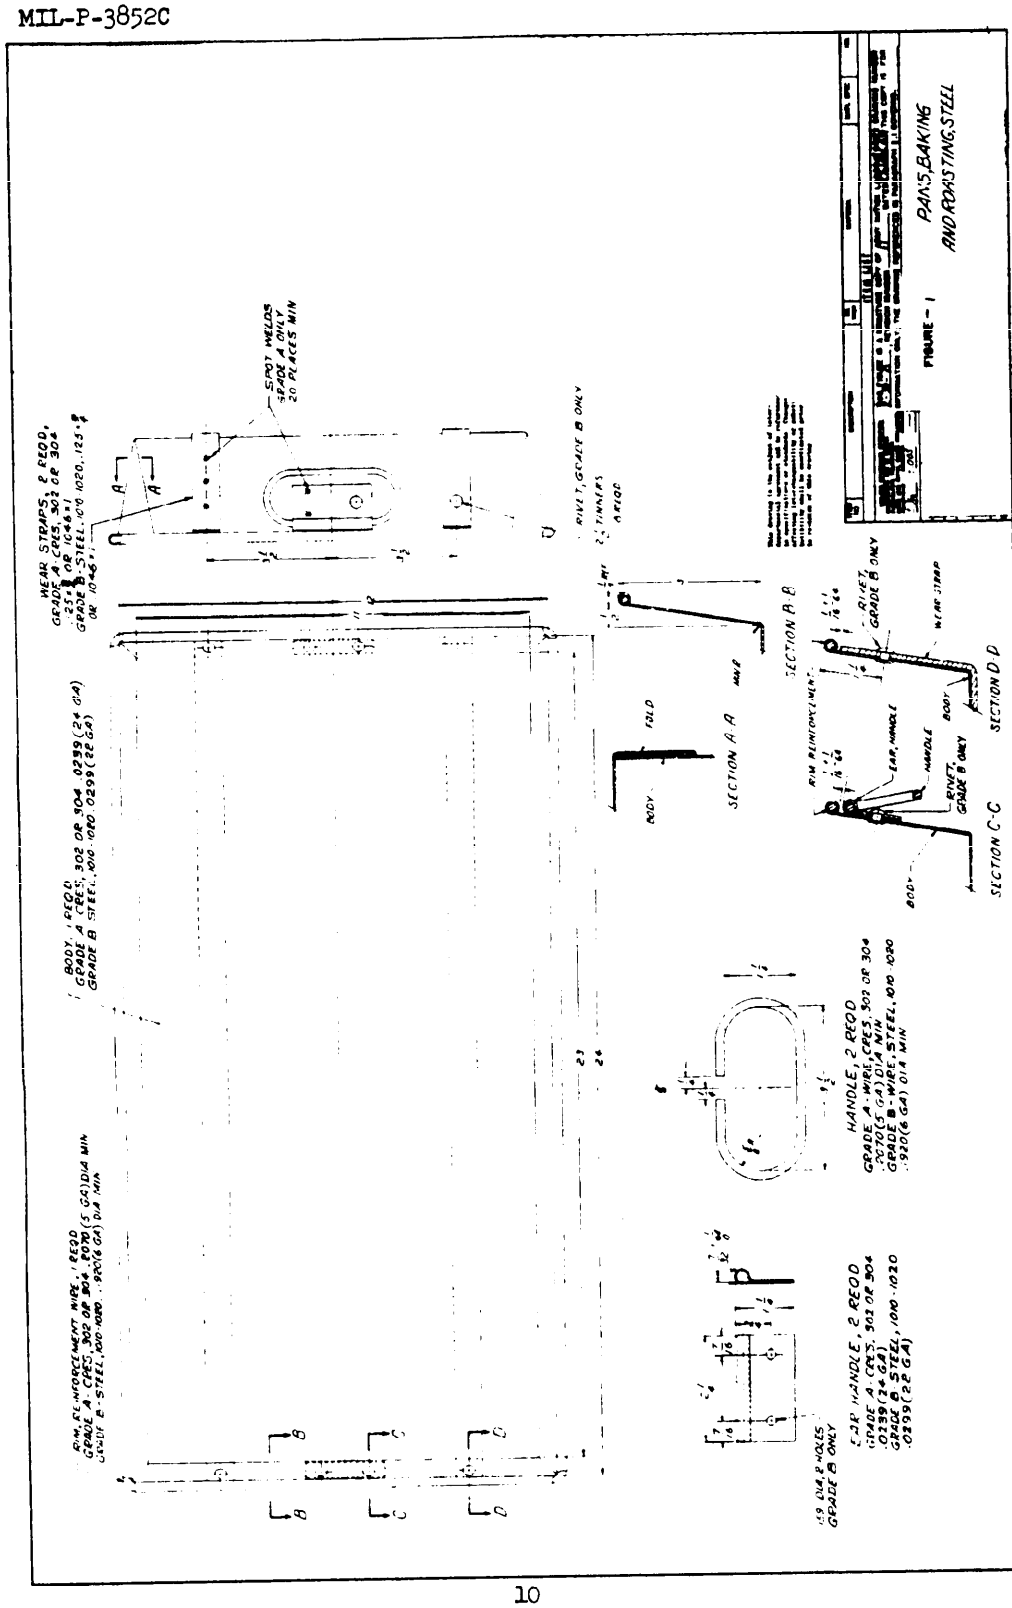

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:49Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Pans, Baking and Roasting; Corrosion-Resisting Steel and Carbon Steel MIL-P-3852C

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:49Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01762

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:49Z
Check the source to verify that this is the current version before use.