MILITARY SPECIFICATION

STAND, OFFICE MACHINE, TYPEWRITER, STEEL, 5-POSITION

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 This specification covers one type and size of steel, office machine stand, with five recessed stations for mounting typewriters (see 6.1).

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-698	-	Steel, Sheet and Strip, Low Carbon.
QQ-T-830	-	Tube, Steel, (Carbon, Mechanical; Seamless and Welded).
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-529	-	Enamel, Alkyd, Semi-Gloss.
LLL-L-354	-	Linoleum; Desk Top.
MMM-A-260	-	Adhesive, Water-Resistant, (For Sealing Waterproofed Paper).
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-621	-	Boxes, Wood Nailed and Lock-Corner.
PPP-B-1055	-	Barrier Material, Waterproofed, Flexible.
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

STANDARDS

FEDERAL

FED-STD-595 - Colors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids, or request for proposal shall apply:

NATIONAL BUREAU OF STANDARDS

Handbook H-28 - Screw Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.,

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Ill. 60606.)

(Technical society and technical associations specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article.- When specified (see 6.2), before production is commenced, a finished office machine typewriter stand covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. Approval of the preproduction sample authorizes commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for office machine typewriter stands, provided the completed item complies with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

3.2.1 Steel.

* 3.2.1.1 Steel, sheet and strip, low-carbon.- The steel sheet shall be cold or hot rolled, any quality, temper, finish and edge, conforming to 1008-1020 inclusive of QQ-S-698.

* 3.2.1.2 Tube, steel, (carbon, mechanical; seamless and welded).- The steel tube shall be square shape and shall conform to QQ-T-830. The wall thickness of tubing shall be not less than .083 inch thick.

* 3.2.2 Linoleum.- The linoleum shall conform to any type of LLL-L-354. The color shall be gray and shall match the sample panel (see 6.3).

* 3.2.3 Hardware.- The screws, nuts, bolts, washers, and lockwashers shall be steel and shall be cadmium-or nickel-plated. The threaded hardware shall be in accordance with National Bureau of Standards Handbook H-28.

* 3.2.3.1 Face hardware.- The face hardware shall be anodized aluminum alloy, commercial 300 or 400 series corrosion-resisting steel, or steel, chromium plated.

* 3.2.4 Enamel.- Enamel shall conform to TT-E-529. The color shall be gray, No. 26134 of FED-STD-595.

* 3.3 Design and construction.- The stand shall conform to the design and dimensions shown on figure 1 and as specified herein. Construction methods not specified herein shall conform to the methods normally used by the manufacturer of office machine typewriter stands, provided the completed item complies with all the provisions of this specification. The components of the stand shall not vibrate, loosen, or be distorted when the assembled stand is tested as specified in 4.4.1. The assembled stand shall have no permanent set when tested as specified in 4.4.2.

* 3.3.1 Top, plate.- The top plate of the stand shall be fabricated from the steel specified in 3.2.1.1 and shall be not less than 0.0478 inch thick. The top shall be reinforced. The reinforcements applied at the table's edge shall be formed steel channel, not less than 0.0478 inch thick. The top plate shall be covered with linoleum specified in 3.2.2 and shall be edge-faced with a binding strip. The binding strip shall be fabricated of materiel specified in 3.2.3.1. The assembled top shall overhang typewriter stations by not more than 1/2 inch. All corners of the top shall be rounded to not less than a 1-inch radius.

* 3.3.2 Aprons.- The aprons shall be fabricated from the steel specified in 3.2.1.1 and shall be not less than 0.0598 inch thick. The aprons shall be flanged at the top not less than 3/4 inch and channeled at the bottom

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

with not less than a 1/4 inch inside flange. The front apron shall be reinforced to support the typewriter bases.

* 3.3.3 Legs.- The legs shall be fabricated from the steel tube specified in 3.2.1.2 and shall be not less than 3 inches square and shall be tapered. Each leg shall be fitted with a foot socket specified in 3.3.4. All legs shall be interchangeable; the center legs within center positions and corner legs within corner positions. The legs shall be readily disassembled, interchanged and assembled when tested as specified in 4.4.1 without the use of special tools.

* 3.3.4 Foot sockets.- The foot sockets shall be of the material specified in 3.2.3.1. As applicable, the steel foot sockets shall be not less than 0.0299 inch thick and the aluminum or aluminum alloy foot sockets shall be made from not less than 0.039 inch thick aluminum or aluminum alloy. The foot sockets shall be not less than 1-1/2 inches high and shall be formed to conform to the shape of the leg. The foot sockets shall be flush with the outside surface of the leg and shall be secured by recessed fastenings which are removable without the use of special tools.

* 3.3.5 Welding.- Surfaces to be welded shall be cleaned and free of rust, scale, grease, or other foreign matter prior to welding.

* 3.4 Finish.-

* 3.4.1 Pretreatment.- All exterior and interior metal surfaces, except exposed hardware, shall be treated for painting in accordance with any method and type of TT-C-490.

* 3.4.2 Primer.- The surfaces, pretreated as specified in 3.4.1, shall be coated with a commercial primer, except the primer coat may be omitted, provided the dry film thickness of the enameling coat specified in 3.4.3 averages not less than 1.0 mil. and no reading is less than 0.7 mil.

* 3.4.3 Enamel.- The primed surfaces shall be coated with enamel specified in 3.2.4.

* 3.5 Marking for identification.- The stand shall be marked for identification with the manufacturer's identification or readily identifiable trademark.

* 3.6 Workmanship.- All surfaces of the stand shall be free from burrs, slivers, rough or sharp edges. Components shall not be broken, cracked, split or malformed. All the welds shall be smooth and free from pits, flashes, cracks and burn through. The enameled surfaces shall be smooth, uniform and free of runs, wrinkles, grit, and areas of no film. The coating shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking, or blistering. The finished top shall be free from waves, irregularities, humps, and depressions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects specified in table I, dimensions specified, and tested as specified in 4.4.1 and 4.4.2. The presence of any visual defect, any dimension not within the specified requirements, or failure to pass the tests shall be cause for rejection of the preproduction sample.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.2 Process inspection.-

* 4.3.2.1 In-process examination.- Examination shall be made during the manufacturing process for requirements specified in table I. Whenever nonconformance is noted, correction shall be made to affected items in process.

TABLE I.- In-process examination

Requirement	Requirement paragraph
Wall thickness of steel tube	3.2.1.2
Metal thickness of material for foot sockets	3.3.4
Surfaces cleaned prior to welding	3.3.5
Pretreatment of exterior and interior metal surfaces except exposed hardware	3.4.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

* 4.3.3 End item inspection.- The lot shall be all the complete stands offered for inspection at one time. The sample unit shall be one stand.

* 4.3.3.1 Visual examination.- Examination of each sample unit shall be made for defects in table II. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not enameled where specified.	X	
	Color not as specified on metal surfaces.		X
	Area of no film.		X
	Contains streaks, runs, drops, grit, or wrinkles.		X
	Not continuous or is not smooth and uniform.	X	
	Evidence of peeling, flaking, or blistering.		X
Construction and workmanship	Component not type, size or shape specified.	X	
	Any component missing, broken, split, cracked or malformed.	X	
	Component in wrong location.	X	
	Any burrs, slivers, rough or sharp edges.	X	
	Corners not rounded as specified.		X
Linoleum	Missing.	X	
	Not edge-faced with binding strip.	X	
	Binding strip loose.		X
	Color not as specified.		X
	Not free from waves, irregularities, humps, and depressions.		X
Welding	Not smooth or sound.	X	
	Not free from pits, flashes, cracks, and burn through.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Foot socket	Not flush with outside surface of leg.		X
	Not removable without use of special tools.	X	
	Not secure.	X	
Identification marking	Missing, incomplete, illegible, or not as specified.		X

* 4.3.4 Dimensional examination.- Examination shall be made of the stand for defects in dimensions. Any dimension that is not within the specified requirements shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.5 Testing of the end item.- Testing of the end item shall be performed in accordance with 4.4.1 and 4.4.2. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units.

4.3.6 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects shall be as indicated in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE III.- Examination of preparation for delivery

Examination	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as cushioning inadequate or shroud seams not sealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

4.3.6.1 Examination of shipping containers.- Examination for defects in closure and strapping of shipping containers shall be in accordance with the appendix of the applicable container specification.

4.4 Tests.-

4.4.1 Performance.- The assembled stand shall be placed on a flat, level surface. The legs shall be disassembled, interchanged, and assembled to the stand 10 times. A manual typewriter shall then be placed on each of the five stations and all five typewriters shall be operated simultaneously for 10 minutes at an average speed of 30 words per minute. Nonconformance to 3.3 and 3.3.3 shall constitute failure of this test.

4.4.2 Static load.- Two 500-pound weights shall be placed an equal distance from the center and end of the top of the assembled stand. The test area shall not exceed 1 square foot for each weight. The weights shall remain in position for at least 5 minutes. Permanent set constitutes failure of this test (see 3.3).

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Disassembly.- The legs shall be removed from each stand and the connecting hardware reassembled to stand or placed in a cotton cloth drawstring bag and tied to the frame of the stand top.

5.1.1.2 Wrapping.- Wrapping paper shall be 30-pound basis weight per ream (24 by 36-500) machine-glazed kraft paper, highly calendered kraft paper, or waxed paper.

5.1.1.3 Cushioning and securing.- Cushioning material shall be fabricated in the form of pads or blankets and may be any one of the following materials, or combination of these materials, to provide built-up cushioning of not less than 1/- inch in thickness.

Macerated paper, plain.
Macerated paper, cellulose faced.
Shredded paper.
Wood wool.
Wood fiber felt.
Cellulose wadding.
Excelsior (sealed ends).
Cotton wadding.
Molded pulpwood.
Laminated cellulose wadding backed with corrugated fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

When cellulose wadding, laminated cellulose wadding backed with corrugated fiberboard, or macerated paper, cellulose faced are used, the initial sheet of machine-glazed kraft paper or waxed paper may be omitted. Cushioning shall be secured in place with tape conforming to type III, grade B of PPP-T-45, or jute, sisal, manila, or cotton twine having a minimum breaking strength of 30 pounds, in such a manner as to prevent any possibility of shifting or becoming detached during transit or storage.

5.1.1.4 Stand.- The stand top shall be wrapped in one thickness of paper specified in 5.1.1.2, overwrapped in one thickness of cushioning material specified in 5.1.1.3, and the wrap secured as specified therein. The legs shall be individually wrapped in one thickness of paper specified in 5.1.1.2, overwrapped in one thickness of cushioning material specified in 5.1.1.3, secured as specified therein, placed within the stand top and secured in postiion with tape or other means.

5.1.2 Level C.- Stands shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be Level A, B, or C, as specified (see 6.2).


5.2.1 Level A.- Each stand, packaged as specified in 5.1, shall be packed in a cleated plywood or nailed wood shipping container conforming to overseas type of PPP-B-601; or class 2, style 2 or 4 of PPP-B-621, respectively. The stand shall be covered with a full-height shroud made of waterproof barrier material conforming to class E-2, H-1, H-5, or M-1 of PPP-B-1055. All seams of the shroud shall be sealed with a 3/4-inch minimum width continuous seam of water-resistant adhesive conforming to MMM-A-260. Each shipping container shall be provided with skids and closed and strapped in accordance with the applicable container specification or appendix thereto.

5.2.2 Level B.- Each stand, packaged as specified in 5.1, shall be packed in a cleated plywood or nailed wood shipping container conforming to domestic type, style A or B of PPP-B-601; or class 1, style 2 or 4 of PPP-B-621, respectively. Each shipping container shall be provided with skids and closed and strapped in accordance with the applicable container specification or appendix thereto.

5.2.3 Level C.- Stands, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

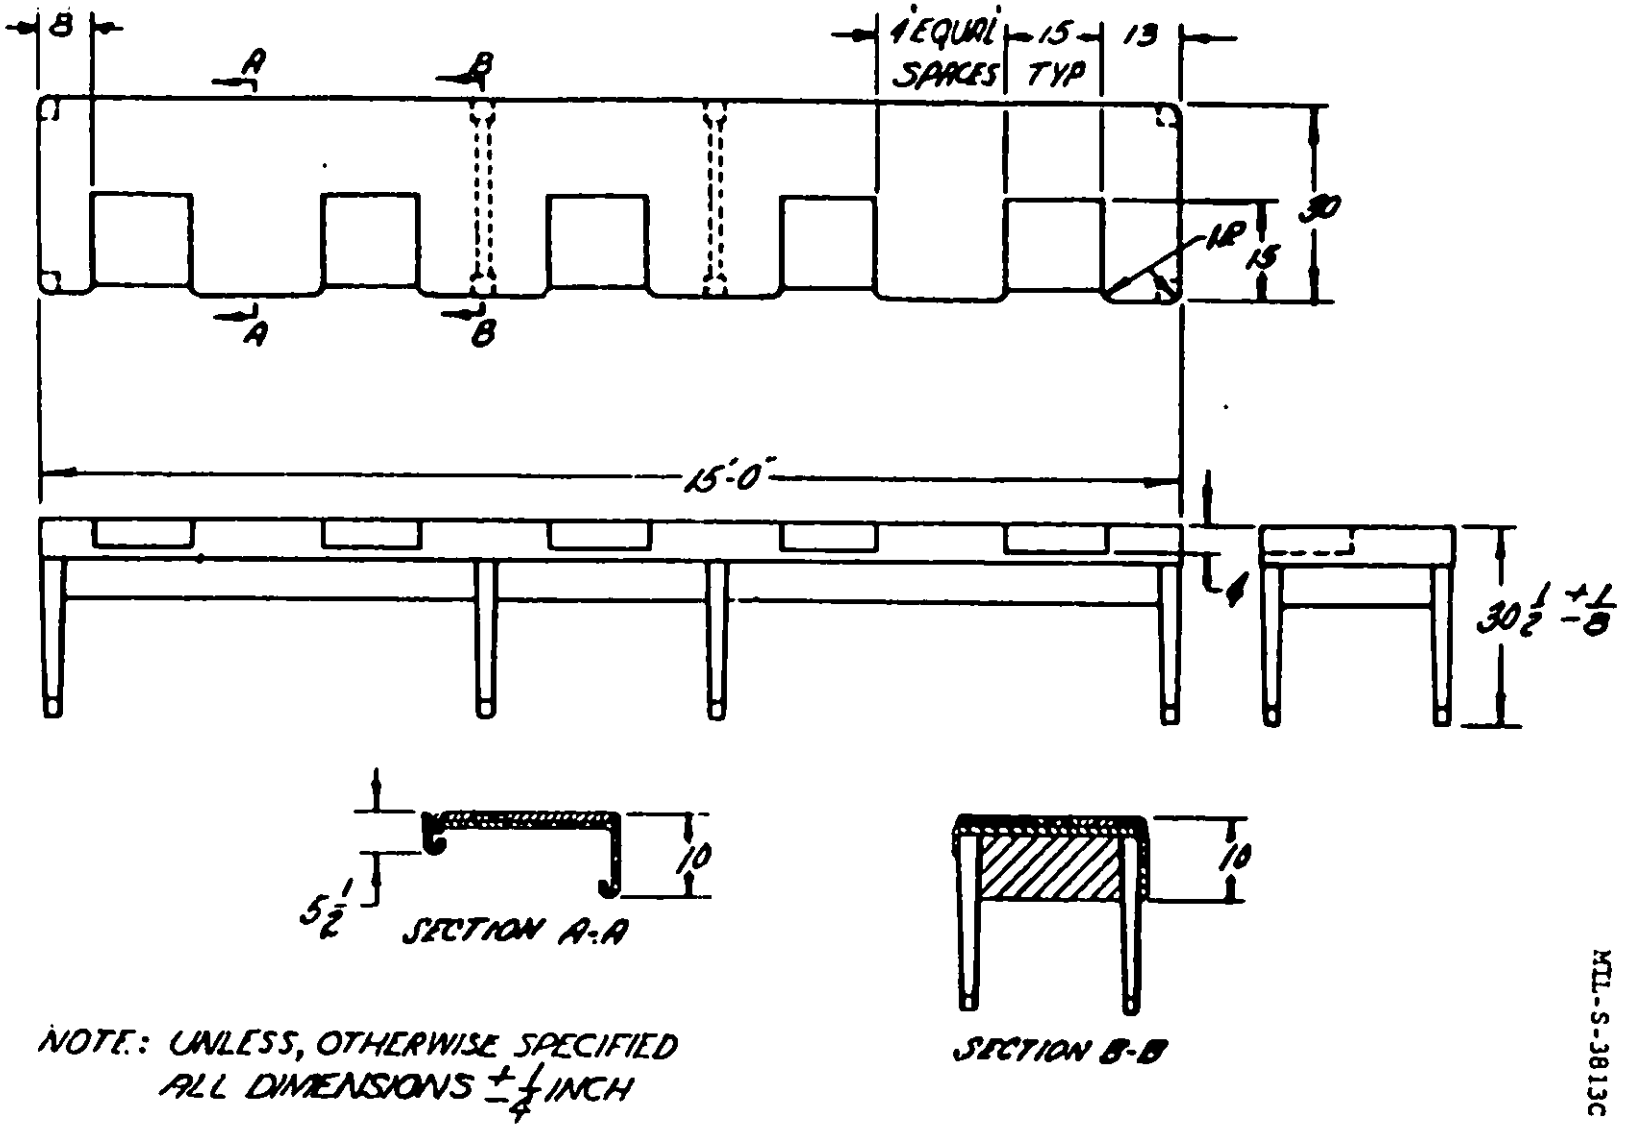

MIL-S-3813C

FIGURE 1. STAND, OFFICE MACHINE, TYPEWRITER, STEEL, 5-POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION Stand, Office Machine, Typewriter, Steel, 5-Position MIL-S-3013C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD, FORM, JAN 66 1426 REPLACES EDITION OF 1 OCT 56 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:44Z
Check the source to verify that this is the current version before use.