PERFORMANCE SPECIFICATION SHEET

MICROPHONE ASSEMBLY, M-169A/AIC

This amendment forms part of MIL-PRF-26542/12B, dated 11 February 1999,
And is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 3

Figure 2: Add the following table:

Frequency points (Hz)	200 Hz	300 Hz	360 Hz	1,000 Hz	4,000 Hz	5,000 Hz	6,000 Hz
Upper limits (dB)	-2.0	2.0	(2.21) 1/	(3.40) 1/	5.0	5.0	-2.00
Lower limits (dB)	-12.5	(-8.01) 1/	-6.0	-2.0	-2.0	(-9.17) 1/	-15.0

1/ dB limits between key break point are calculated.

Figure 3: Delete and substitute:

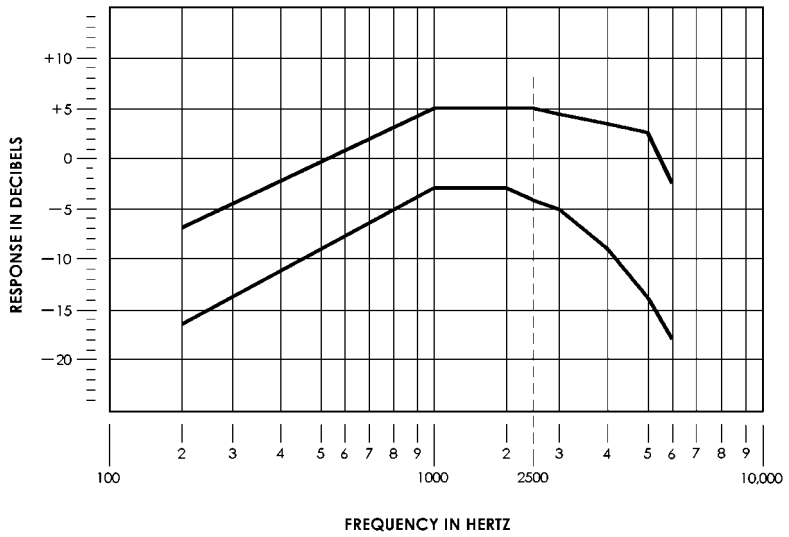

Frequency points (Hz)	200 Hz	1,000 Hz	2,000 Hz	2,500 Hz	3,000 Hz	4,000 Hz	5,000 Hz	6,000 Hz
Upper limits (dB)	-7.00	5.00	5.00	5.00	(4.34) 1/	(3.31) 1/	2.50	-2.50
Lower limits(dB)	-16.50	-3.00	-3.00	(-4.10) 1/	-5.00	-9.00	(-13.96) 1/	-18.00

1/ dB limits between key break point are calculated.

FIGURE 2. Frequency response envelope for microphone element M-101/AIC ground level.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:57Z
Check the source to verify that this is the current version before use.

PAGE 4

Frequency response: Add the following:

The response curves generated shall be on the same scale as shown in figures 2 & 3. The response curve shall not exceed the upper and lower limit curves of the stationary Frequency Response Envelope, within the frequency ranges identified in the appropriate chart (see figures 2 and 3).

PAGE 5

Intended use: Delete and substitute:

Intended use. : Microphone element M-169A/AIC is a noise canceling dynamic moving coil microphone element designed for use in an oxygen mask or pressure-type oxygen helmet, at altitudes where the use of an oxygen helmet is required. The microphone element is intended for use with both the MBU-12 and MBU-20/P (Combat Edge) oxygen masks, to provide communication under the noise conditions encountered in military aircraft.

PAGE 6

Table 1: Delete and substitute:

TABLE I. Parameter applicability.

Inspection	Qualification	Group "A"	Group "B"	Group "C"
Group I				
Visual and mechanical inspection	X	X		
Sensitivity at ground level	X	X		
Sensitivity at altitude	X			
Frequency response at ground level	X	X		
Frequency response at altitude	X			
Impedance	X	X		
Noise cancellation characteristic	X			
Effect of external magnetic field	X			
Stray magnetic field	X			
Linearity	X			
Talk-out	X	X		
Dielectric withstanding voltage	X			
Signal-to-noise	X		X	
Distortion	X		X	
Interchangeability	X		X	
Group II				
Thermal shock	X			X
Humidity	X			X
Drop	X			X
Pressure equalization	X			X
Explosive decompression	X			X
Salt fog	X			X
Group III				
Vibration	X			X
Bounce	X			X
Altitude	X			X
Moisture barrier seal	N/A			N/A
Immersion	N/A			N/A
Group IV				
Fungus	X			
Group V				
Gun blast	N/A			
Microphone leakage	X			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:57Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, AT, AV, CR4
Navy – AS, OS
Air Force - 99

Preparing activity:
DLA - CC

(Project 5965-0351-008)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:57Z
Check the source to verify that this is the current version before use.