INCH-POUND

MIL-PRF-26542/3C
30 May 1997

SUPERSEDING
MIL-M-26542/3B
29 March 1985

PERFORMANCE SPECIFICATION SHEET

MICROPHONE ASSEMBLY, M100/AIC

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-26542.


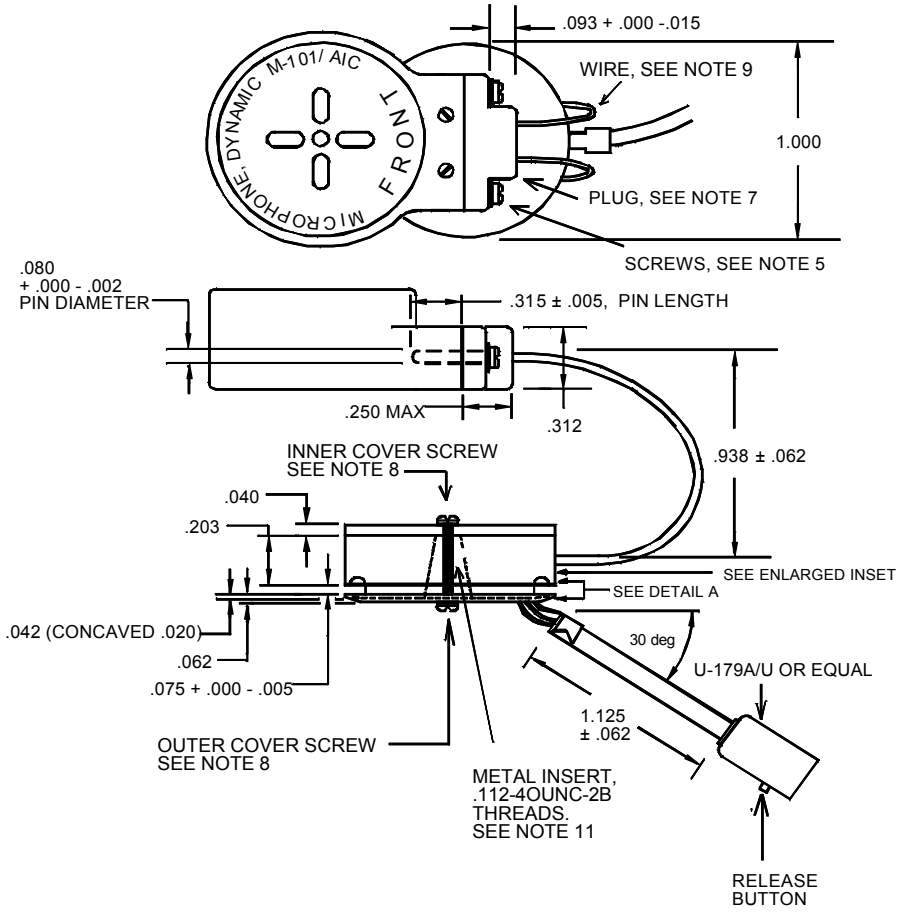



FIGURE 1. Microphone assembly, M100/AIC .

DISTRIBUTION STATEMENT A . Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:52Z
Check the source to verify that this is the current version before use.

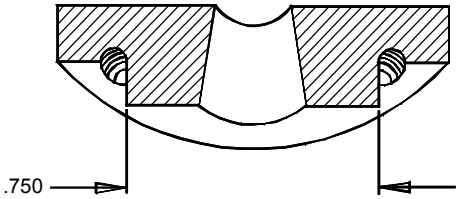


DETAIL A




DIMENSIONS PROVIDE INTERFACE TO OYXGEN MASK OPENING.

ENLARGED INSET

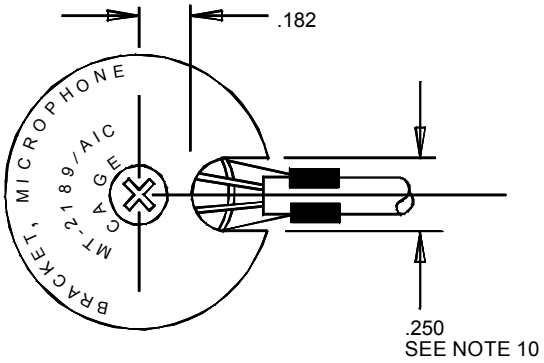

MICROPHONE BRACKET COVER, TOP VIEW

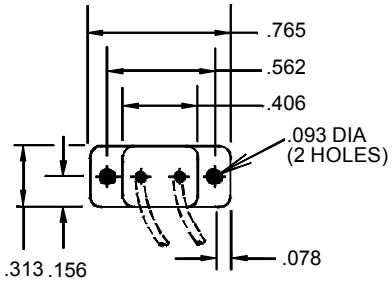

DIMENSIONS PROVIDE INTERFACE TO MICROPHONE ELEMENT.

BRACKET, REAR VIEW

NOTES:

1. Dimensions are in inches. Tolerance is ±.015, unless otherwise specified.
2. Microphone element in accordance with MIL-M-26542/4.
3. Specific dimensions are required in order to provide a sealed interface to the next-higher-assembly (MBU-5/P oxygen mask) and interface to associated communications equipment.
4. Position of bracket marking (on surface shown) is optional.
5. Screws shall be AN500D-6 (3/8", 2-56 thread), for interchangeability of spares. Screws shall be provided along with a means for retaining tightness during use, such as lockwashers.
6. Set-screws shall secure the part firmly to the bracket, shall be of type slotted, and recessed.
7. Plug dimensions shall enable the plug-pins to seat firmly in the M-101/AIC microphone element, providing a strong electrical connection, and not becoming detached during normal use.
8. Bracket-cover screws shall enable the part to pass the specified leakage test.
9. Wire hardness 3/4 MIN (for stable positioning), Teflon jacket or equal, color same as microphone.
10. Bracket opening shall be sufficiently wide to prevent damage to wire jacketing (as a result of the flex and pull of the cable during normal use), without compromising the pressure seal.
11. Metal-insert threads shall be as shown, for cover-screw interchangeability across manufacturers.

FIGURE 1. Microphone assembly, M100/AIC - Continued.

REQUIREMENTS:

Positioning adjustment of bracket: The wire between the oxygen mask mounting plate and terminal block for the microphone element shall have a flexlife of at least 25 position adjustments. Following the test, the talk requirement shall be met. This is a Qualification and Group C test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:52Z
Check the source to verify that this is the current version before use.

Mechanical fit to oxygen mask (leakage): The microphone bracket shall permit no more than 100 milliliters/min of inboard leakage when tested as specified. This test is to be performed during initial product qualification, and as a Group C test (per MIL-PRF-26542, microphone bracket leakage test). The rubber used in this test shall simulate the mask rubber across the full tolerance range specified in MIL-M-27274, with testing repeated at simulated thicknesses of 0.110 in and 0.140 in.

Threaded metal insert: The threaded metal insert shall be secured to the bracket body, and shall not become detached or loosen during normal use, providing a secure interface of the bracket to the sealed oxygen mask.

Functional operation test: Each microphone shall be given an operational test as a final test prior to packaging, in order to verify the electrical continuity of the connection between the U-179A/U plug and the microphone element.

Component parts: The microphone shall be supplied with the following components assembled in accordance with figure 1, to provide interchangeability, and to meet the performance requirements of MIL-PRF-26542.

Microphone element: One each M-101/AIC in accordance with MIL-PRF-26542/4. Screws (see figure 1) shall be supplied. The screws shall be supplied with additional hardware necessary to ensure that they do not become disengaged during normal use, such as lockwashers.

Microphone bracket: One each MT-2189/AIC in accordance with this specification.

Cord assembly: One each electrical cord in accordance with Air Force drawing 59C12796 using WD-27/U or WD-34/U cable, for compatibility with performance requirements of this specification.

Dielectrical strength of bracket: The bracket shall be designed to completely prevent conduction of unsafe current to the user, and shall meet the dielectric withstanding requirements of MIL-PRF-26542. The dielectric withstanding voltage test may be performed on the bracket separate from the microphone element, at the manufacturer's option. This is a Qualification test and Group A test.

Intended use: Microphone assembly M-100/AIC is a noise-canceling dynamic moving coil microphone assembly designed for use with oxygen mask type MBU-5/P. The microphone is intended for use with intercommunication sets AN/AIC-10( ) and AN/AIC-18 to provide communication under the noise conditions encountered in military aircraft.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Preparing activity:
Air Force - 85

Review activities:
Army - AR, AT, AV, ME
Navy - AS, OS
Air Force - 99
DLA - CC

(Project 5965-0260)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:52Z
Check the source to verify that this is the current version before use.