
MIL-M-26542/8A
29 March 1985
SUPERSEDING
MIL-M-26542/8
29 August 1983

MILITARY SPECIFICATION SHEET

MICROPHONE DYNAMIC, M-116( )/G

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the microphone described herein shall consist of this specification and the latest issue of MIL-M-26542.

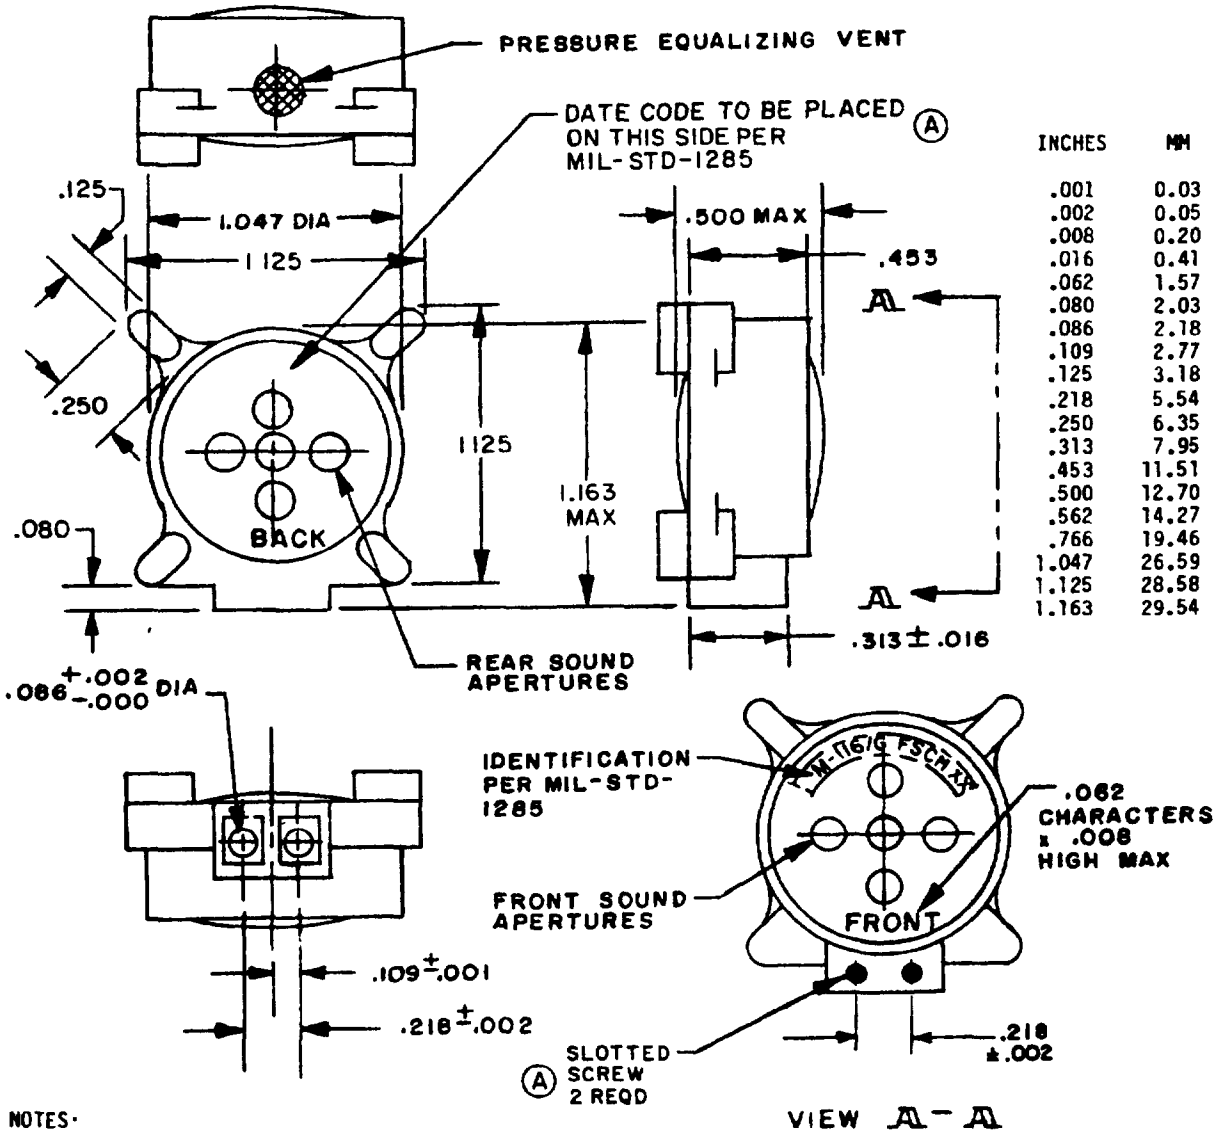


INCHES	MM
.001	0.03
.002	0.05
.008	0.20
.016	0.41
.062	1.57
.080	2.03
.086	2.18
.109	2.77
.125	3.18
.218	5.54
.250	6.35
.313	7.95
.453	11.51
.500	12.70
.562	14.27
.766	19.46
1.047	26.59
1.125	28.58
1.163	29.54

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm).

Ⓐ FIGURE 1. Microphone element M-116( )/G.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:54Z
Check the source to verify that this is the current version before use.

FSC 5965

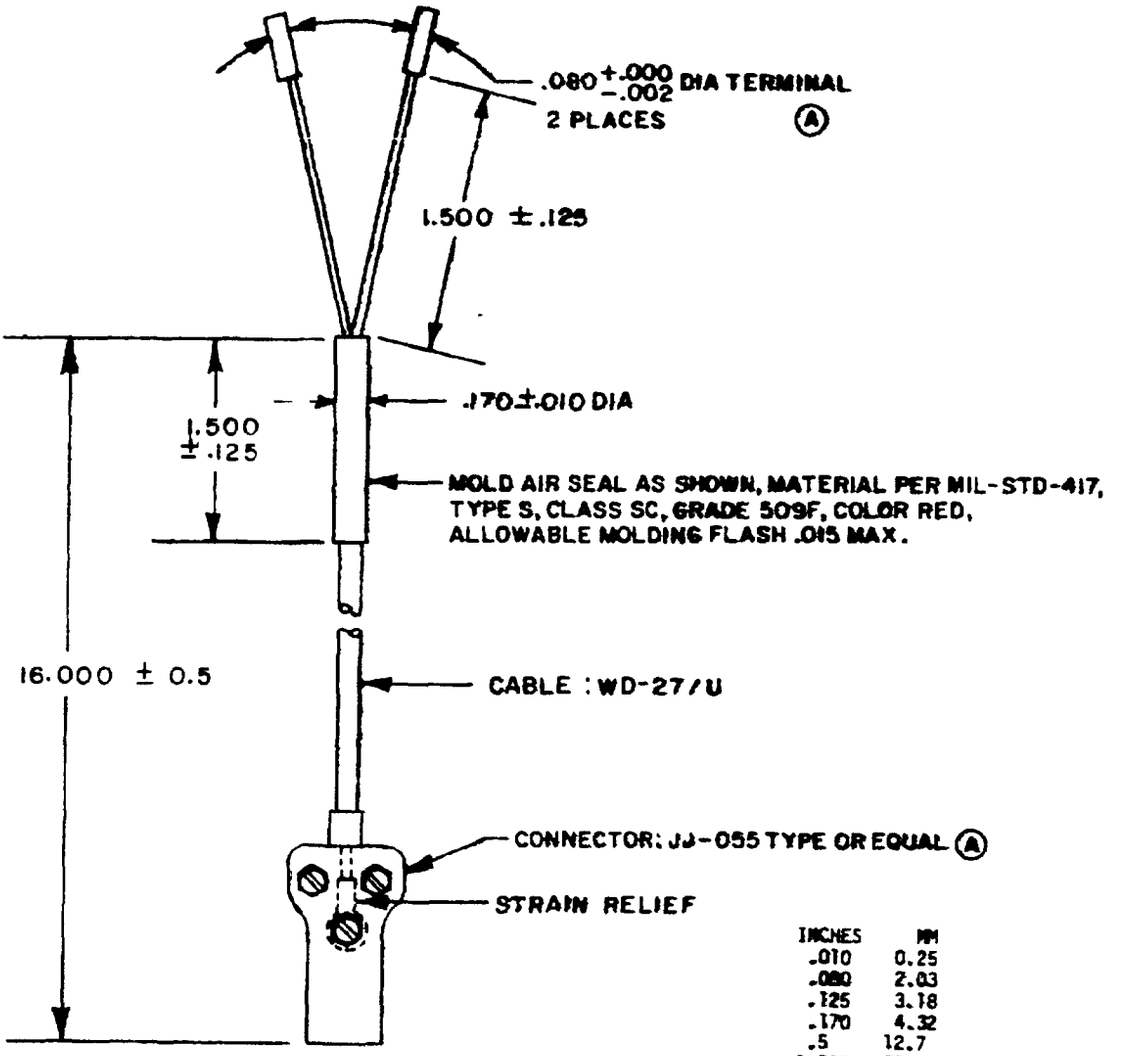

INCHES	MM
.010	0.25
.080	2.03
.125	3.18
.170	4.32
.5	12.7
1.500	38.1
16.000	406.4

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Cable assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:54Z
Check the source to verify that this is the current version before use.

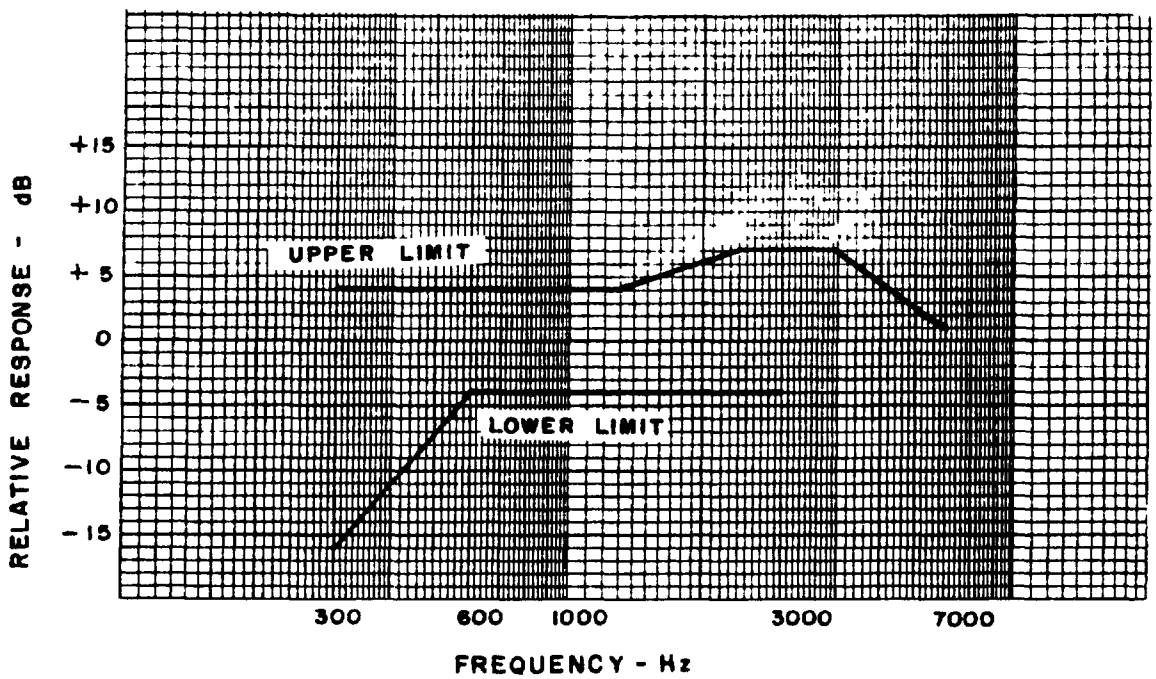


FIGURE 3. Frequency response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Color Semigloss black, 27038 in accordance with FED-STD-595.

Component parts.

Microphone element. See figure 1.

Cord assembly. See figure 2.

(A) Plug assembly JJ-055 type or equal.

Performance.

Sensitivity at ground level. Not less than -56 dBm with an input of 28 dynes/cm^2 at 1 kHz.

Frequency response envelope shall be as shown on figure 3 (between 300-3,000 Hz).

Frequency response at altitude: ±5 dB of ground level response when measured at 10,000.

Impedance. 150 ohms ±20 percent.

(A) Total harmonic distortion. Between 300-3,000 Hz, 5 percent at 114 dB relative to 20 micropascals.

Resistive load: 150 ohms.

Weight. 18 grams less cord.

Blast: Applicable.

Air stop. Immerse the microphone end of the cable in water to a depth that will cover the air stop portion. Apply 4 pounds of air pressure to the connector end of the cable for 10 minutes. The air stop shall not allow passage of air.

The microphone assembly shall be tested in accordance with the tests listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:54Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Parameter applicability.

Inspection	Requirements paragraph	Test paragraph	Qualification tests	Group "A" tests	Group "B" tests	Group "C" tests
Group I						
Visual and mechanical inspection	3.1,3.4,3.5	4.7.1	X	X		
Sensitivity of ground level	3.5.1	4.7.2.2	X	X		
Sensitivity at altitude	3.5.2	4.7.2.3	X			
Frequency response at ground level	3.5.3	4.7.2.4	X	X		
Frequency response at altitude	3.5.4	4.7.2.5	X			
Impedance	3.5.5	4.7.3	X	X		
Noise cancellation characteristics	3.5.7.1	3.7.5.1				
Effect of external magnetic field	3.5.8	4.7.6				
Stray magnetic field	3.5.9	4.7.7				
Linearity	3.5.10	4.7.8				
Talk out	3.5.11	4.7.9	X	X		
Dielectric withstanding voltage	3.5.12	4.7.10	X	X		
Signal to noise	3.5.7	4.7.5	X		X	
Distortion	3.5.6	4.7.4	X		X	
Interchangeability	3.5.13	4.7.11	X		X	
Air stop	See requirements		X	X		
Group II						
Thermal shock	3.5.14	4.7.12	X			X
Humidity	3.5.15	4.7.13	X			X
Drop	3.5.16	4.7.14	X			X
Pressure equalization	3.5.17	4.7.15	X			X
Explosive decompression	3.5.18	4.7.16				
Salt fog	3.5.19	4.7.17	X			X
Group III						
Vibration	3.5.20	4.7.18				
Bounce	3.5.21	4.7.19	X			X
Altitude	3.5.22	4.7.20	X			X
Moisture barrier	3.5.23	4.7.21				
Immersion	3.5.24	4.7.22	X			X
Group IV						
Fungus	3.5.25	4.7.23				
Group V						
Gun blast	3.5.26	4.7.24	X			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:54Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - AS
Air Force - 99
DLA - ES

User activities
Army - AR, AT, AV, ME
Navy - OS

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5965-0186-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:54Z
Check the source to verify that this is the current version before use.