
MILITARY SPECIFICATION SHEET

MICROPHONE, DYNAMIC, M-133/U

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the microphone described herein shall consist of this specification and the latest issue of MIL-M-26542.

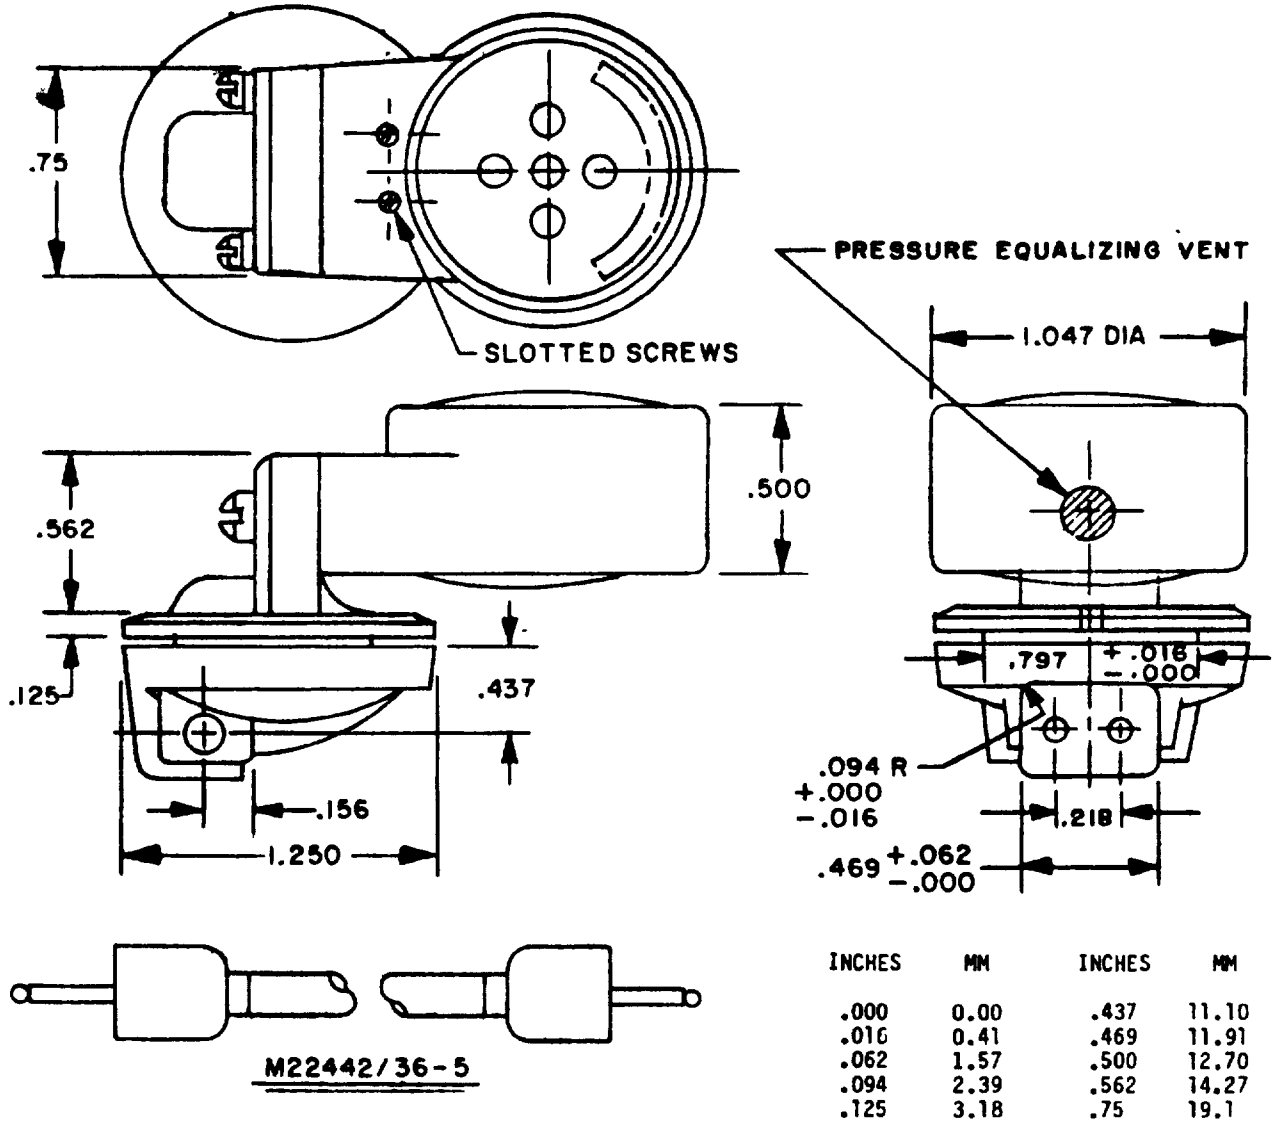

M22442/36-5

INCHES	MM	INCHES	MM
.000	0.00	.437	11.10
.016	0.41	.469	11.91
.062	1.57	.500	12.70
.094	2.39	.562	14.27
.125	3.18	.75	19.1
.156	3.96	1.047	26.59
.218	5.54	1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm).

Ⓐ FIGURE 1. Microphone assembly.

Ⓐ denotes changes

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:55Z
Check the source to verify that this is the current version before use.

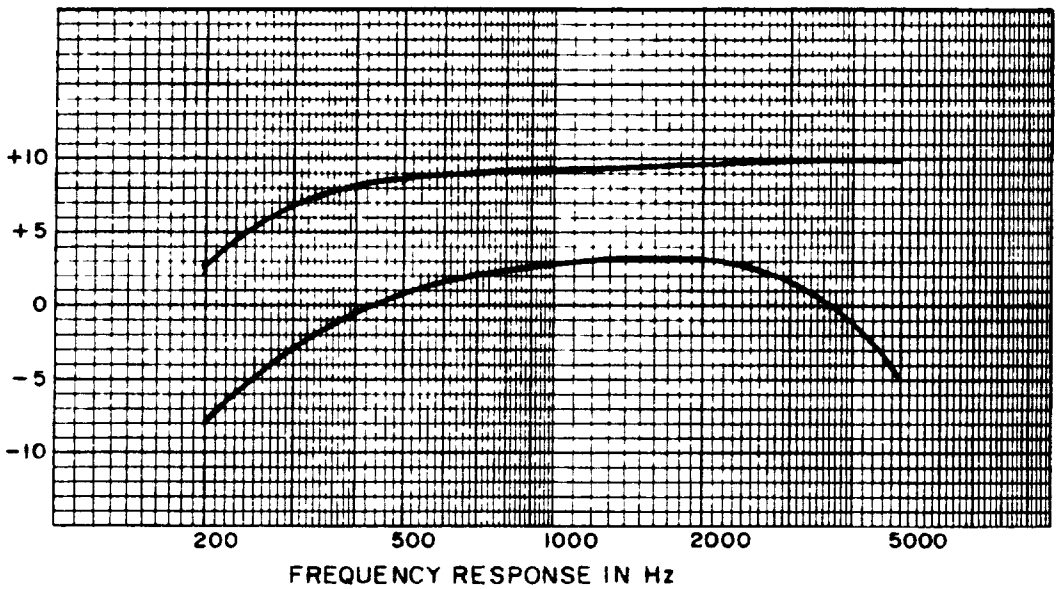


FIGURE 2. Frequency response at sea level.

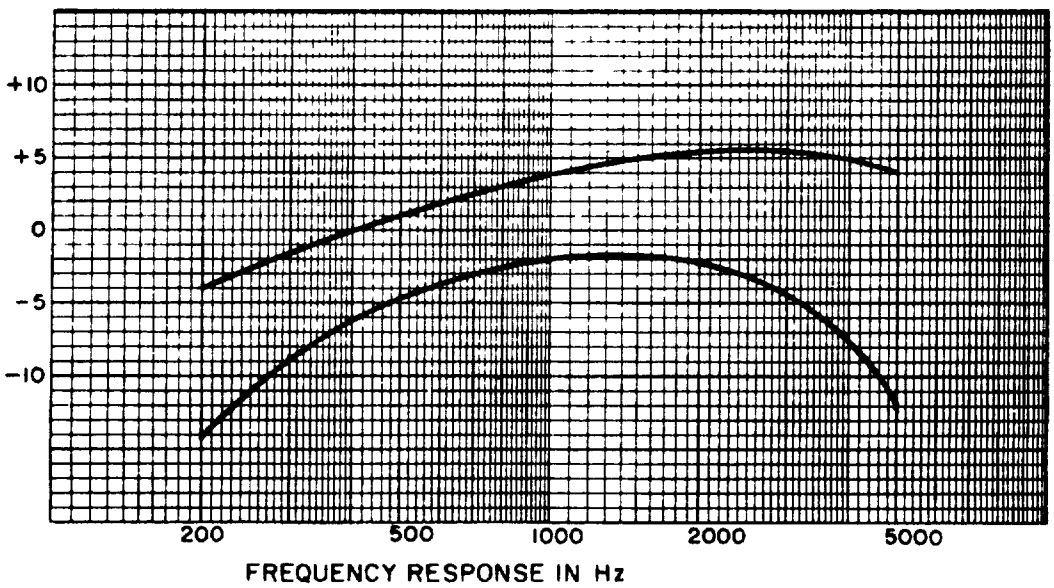


FIGURE 3. Frequency response at 25,000 feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Color: Semigloss black, 27038 in accordance with FED-STD-595.

Component parts:

Microphone element See figure 1.

Boom: See figure 1.

Ⓐ Cord assembly: See figure 1, P/N M22442/36-5.

Plug assembly. U-173/U.

Performance:

Sensitivity at ground level 2.5 to 5.0 microvolts with an input of 114 dB SPL relative to 20 micropascals (0.0002 dynes/cm^2) at 1,000 Hz.

Sensitivity at altitude. To be within 8 dB of measured value at ground level.

Frequency response at ground level: See figure 2.

Frequency response at altitude See figure 3.

Impedance. 4-6 ohms.

Resistive load: 5 ohms.

The microphone assembly shall be tested in accordance with the tests listed in table I.

Ⓐ TABLE I. Parameter applicability.

Inspection	Requirements paragraph	Test paragraph	Qualification tests	Group "A" tests	Group "B" tests	Group "C" tests
Group I						
Visual and mechanical inspection	3.1,3.4,3.5	4.7.1	X	X		
Sensitivity of ground level	3.5.1	4.7.2.2	X	X		
Sensitivity at altitude	3.5.2	4.7.2.3	X	X		
Frequency response at ground level	3.5.3	4.7.2.4	X	X		
Frequency response at altitude	3.5.4	4.7.2.5	X	X		
Impedance	3.5.5	4.7.3	X	X		
Noise cancellation characteristics	3.5.7.1	3.7.5.1				
Effect of external magnetic field	3.5.8	4.7.6	X			
Stray magnetic field	3.5.9	4.7.7	X			
Linearity	3.5.10	4.7.8	X			
Talk out	3.5.11	4.7.9				
Dielectric withstanding voltage	3.5.12	4.7.10	X		X	
Signal to noise	3.5.7	4.7.5	X		X	
Distortion	3.5.6	4.7.4	X		X	
Interchangeability	3.5.13	4.7.11				

- - -

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:55Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Parameter applicability - Continued.

Inspection	Requirements paragraph	Test paragraph	Qualification tests	Group "A" tests	Group "B" tests	Group "C" tests
Group II						
Thermal shock	3.5.14	4.7.12	X			X
Humidity	3.5.15	4.7.13	X			X
Drop	3.5.16	4.7.14	X			X
Pressure equalization	3.5.17	4.7.15	X			X
Explosive decompression	3.5.18	4.7.16				
Salt fog	3.5.19	4.7.17				
Group III						
Vibration	3.5.20	4.7.18	X			X
Bounce	3.5.21	4.7.19	X			X
Altitude	3.5.22	4.7.20	X			X
Moisture barrier	3.5.23	4.7.21				
Immersion	3.5.24	4.7.22	X			X
Group IV						
Fungus	3.5.25	4.7.23	X			
Group V						
Gun blast	3.5.26	4.7.24	X			

Custodians.
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - AS
Air Force - 99
DLA - ES

User activities:
Army - AR, AT, AV, ME
Navy - OS

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5965-0186-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:55Z
Check the source to verify that this is the current version before use.