INCH-POUND

MIL-DTL-25469J
08 December 2014
SUPERSEDING
MIL-V-25469H
17 August 1990

DETAIL SPECIFICATION

VALVES, FILLER, LIQUID OXYGEN, AIRCRAFT TYPE

INACTIVE FOR NEW DESIGN

Comments, suggestions, or questions on this document should be addressed to Oklahoma City Air Logistics Center/ENSDAA, 3001 Staff Drive, Suite 1AB81A, Tinker AFB, OK 73145 or emailed to ocalc.dsp@us.af.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 4820

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of liquid oxygen filler valves for use in 70- and 300-pound per square inch gage (psig) liquid oxygen systems in aircraft.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of these lists, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

A-A-58092	-	Tape, Antiseize, Polytetrafluorethylene

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-S-7742	-	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-PRF-25961	-	Valve, Fill-Buildup-Vent, Liquid Oxygen Converter, CRU-50/A
MIL-PRF-27210	-	Oxygen, Aviator's Breathing, Liquid and Gas
MIL-PRF-38201	-	Valve, Filler, Liquid Oxygen, Female, CRU-59/E
MIL-C-81302	-	Cleaning Compound, Solvent, Trichlorotrifluoroethane

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-130	-	Identification Marking of U.S. Military Property
MIL-STD-889	-	Dissimilar Metals
MIL-STD-1916	-	DOD Preferred Methods for Acceptance of Product
MS27566	-	Cap Assembly, Liquid Oxygen Fill Valve

DEPARTMENT OF DEFENSE HANDBOOKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

MIL-HDBK-781	-	Handbook for Reliability Test Methods, Plans, and Environments for Engineering, Development Qualification, and Production
MIL-HDBK-831	-	Preparation of Test Reports

(Copies of these documents are available online at http://quicksearch.dla.mil/).

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of the document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

U.S. AIR FORCE

57B3624	-	Tester, Leakage, TTU-28/E Oxygen System Adapter, Assembly of
T.O. 15X-1-1	-	Maintenance Instructions Oxygen Equipment (ATOS)

(Application for copies of these documents may be sent to https://jedmics.af.mil.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ASME INTERNATIONAL

ASME-Y14.24	-	Types and Applications of Engineering Drawings
ASME-Y14.34M	-	Associated Lists
ASME-Y14.35M	-	Revision of Engineering Drawings and Associated Documents
ASME-Y14.100	-	Engineering Drawing Practices

(ASME documents may be obtained online at http://www.asme.org/ or from ASME International, Three Park Avenue, New York, New York 10016-5990, USA.)

ASTM INTERNATIONAL

ASTM-D4126	-	Vapor-Degreasing Grade and General Solvent Grade 1, 1, 1-Trichloroethane

(ASTM documents may be obtained online at http://www.astm.org/ or from American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

SAE INTERNATIONAL

SAE-AS4863	-	Plug, Pipe, External Thread

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

SAE-AS71051 - Pipe Threads, Taper, Aeronautical National Form, Symbol ANPT – Design and Inspection Standard

(SAE documents may be obtained online at http://www.sae.org/ or from SAE World Headquarters, 400 Commonwealth Drive, Warrendale, PA 15096-0001 USA.)

2.4 Order of Precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Valves furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.3).

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3 Deleted.

3.4 Materials. Materials shall conform to applicable specifications and shall be as specified herein. Materials which are not covered by applicable specifications, or which are not specifically described herein, shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended.

3.4.1 Corrosion resistance. All metal parts shall he of a corrosion-resistant material or suitable treated to resist corrosion. Brass, bronze, phosphor bronze, corrosion-resistant steel of the 18-8 grade, and anodized aluminum alloy are considered satisfactory corrosion-resistant materials.

3.4.2 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.4.3 Nonferrous metals. Except for stainless steel or the 18-8 grade. non-ferrous materials shall be used for all parts of the valve except where ferrous materials are essential and do not come in direct contact with oxygen.

3.4.4 Nonmetallic materials. Any nonmetallic material that is easily deteriorated or otherwise affected adversely by continued use with oxygen shall not be used. Non-metallic materials that may come in direct contact with liquid oxygen shall be non-hydrocarbon, non-impact sensitive with LOX, have a brittle point below -297°F, and shall be LOX compatible in all respects.

3.4.5 Protective treatment. Materials used in the construction of the valves that are subject to corrosion in oxygen, salt air, or other atmospheric conditions likely to occur during service

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

usage, shall be protected against such corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip or scale with age or extremes of atmospheric conditions shall be avoided.

3.4.6 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.5 Reliability. The mean-cycles-between failure (MCBF) of the valve shall not be less than 700 cycles at the 90 percent confidence limit before random or wearout failure occurs (see 4.7.7).

3.5.1 Longevity. The service life of the valve shall be the same as the reliability requirement of paragraph 3.5.

3.6 Design and construction. The valve shall be designed and constructed to withstand the strains, jars, vibrations, and other conditions incident to installation and service. The design shall provide for smooth operation and satisfactory performance through-out a temperature range of 260°F to -297°F. The valve shall be designed for an operating pressure of 300 pounds per square inch (psi). The operating mechanisms of the valve shall be held in place by means other than a snap ring.

3.6.1 Dimensions and configuration. The dimensions and configuration shall be in accordance with Figures 1 through 4.


3.6.2 Valve cap. A valve cap shall be provided in accordance with MS27566.

3.6.3 Connection. The valve shall be designed to connect smoothly and positively to a valve conforming to MIL-PRF-38201. The connection shall be leak-tight and shall not become disconnected by shocks or jars. The connection spirals shall terminate with a locking detent in accordance with details shown on Figure 3. The valve shall be designed to include a threaded connection (see Figure 3) for the adaption of the TTU-28/E tester (see drawing 57B3624).

3.6.4 Poppet. The valve shall be designed to actuate when mated with a female LOX filler valve, type CRU-59/E, conforming to MIL-PRF-38201. It shall open automatically when fully engaged and shall automatically and instantaneously close when released from the final phase prior to release from the J slots. It shall include the following requirements:

a. Poppet that is spring loaded in the closed position.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

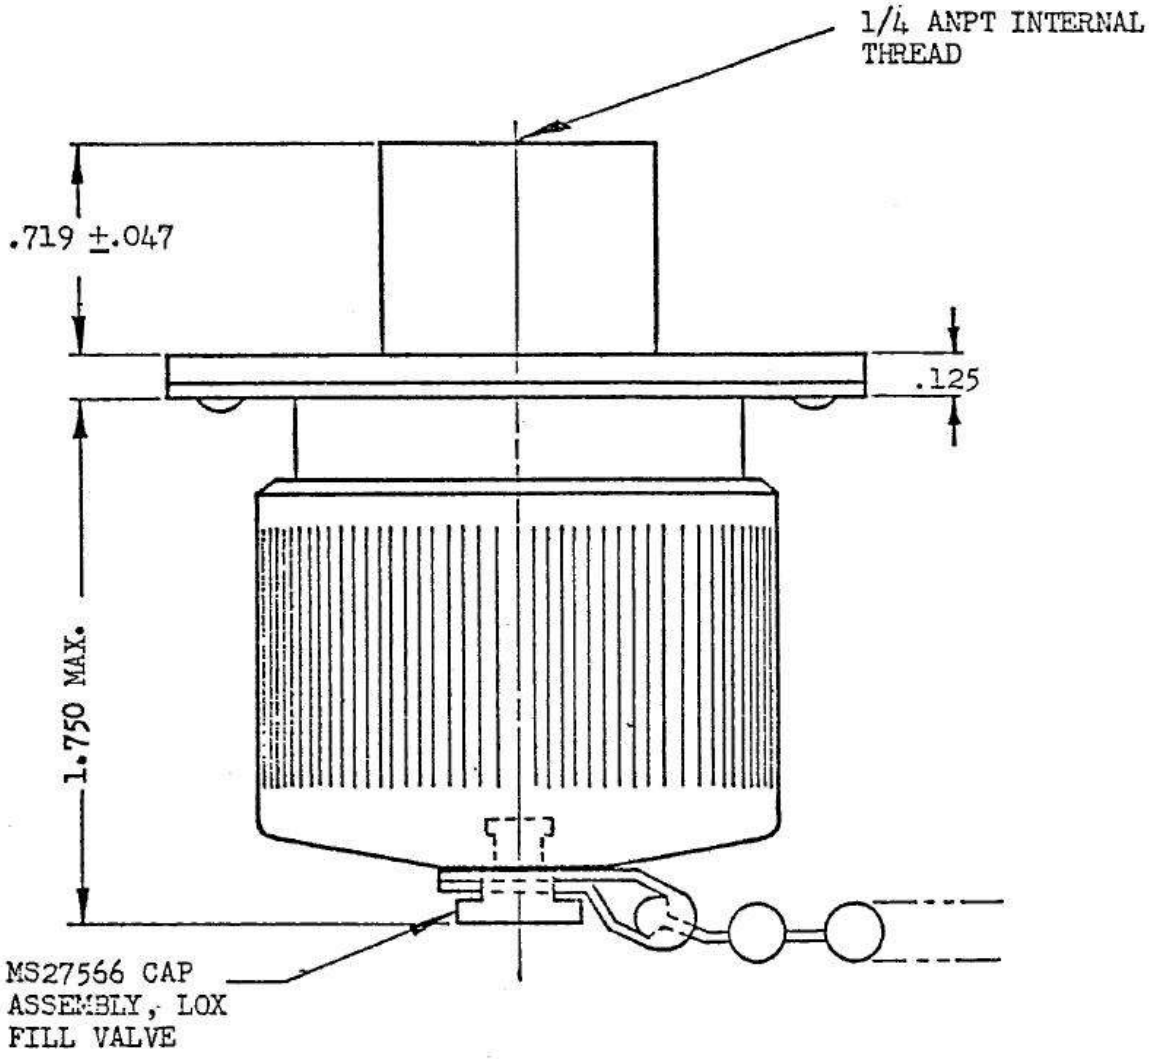

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THREADS SHALL BE IN ACCORDANCE WITH SAE-AS71051.

FIGURE 1. Valve, filler, oxygen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

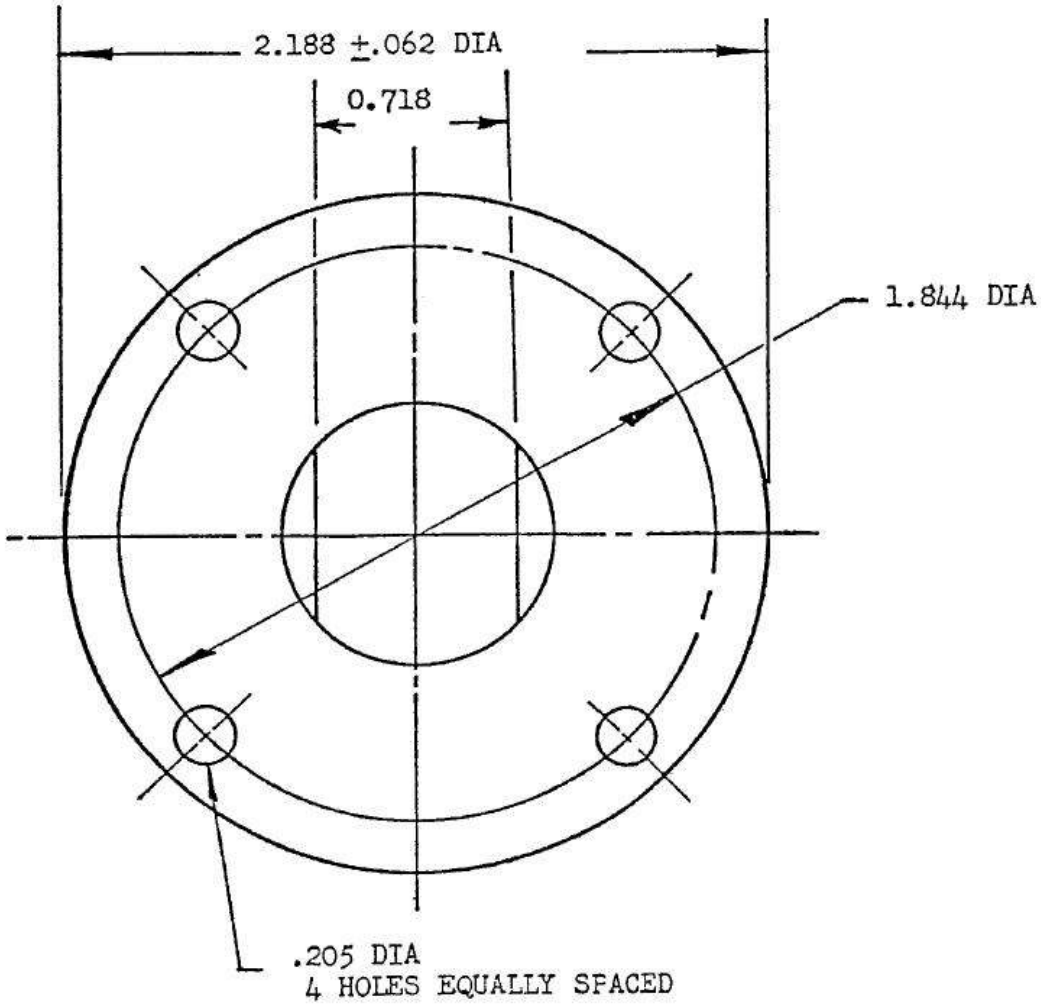

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES:
DECIMALS ±.005.

FIGURE 2. Rear view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

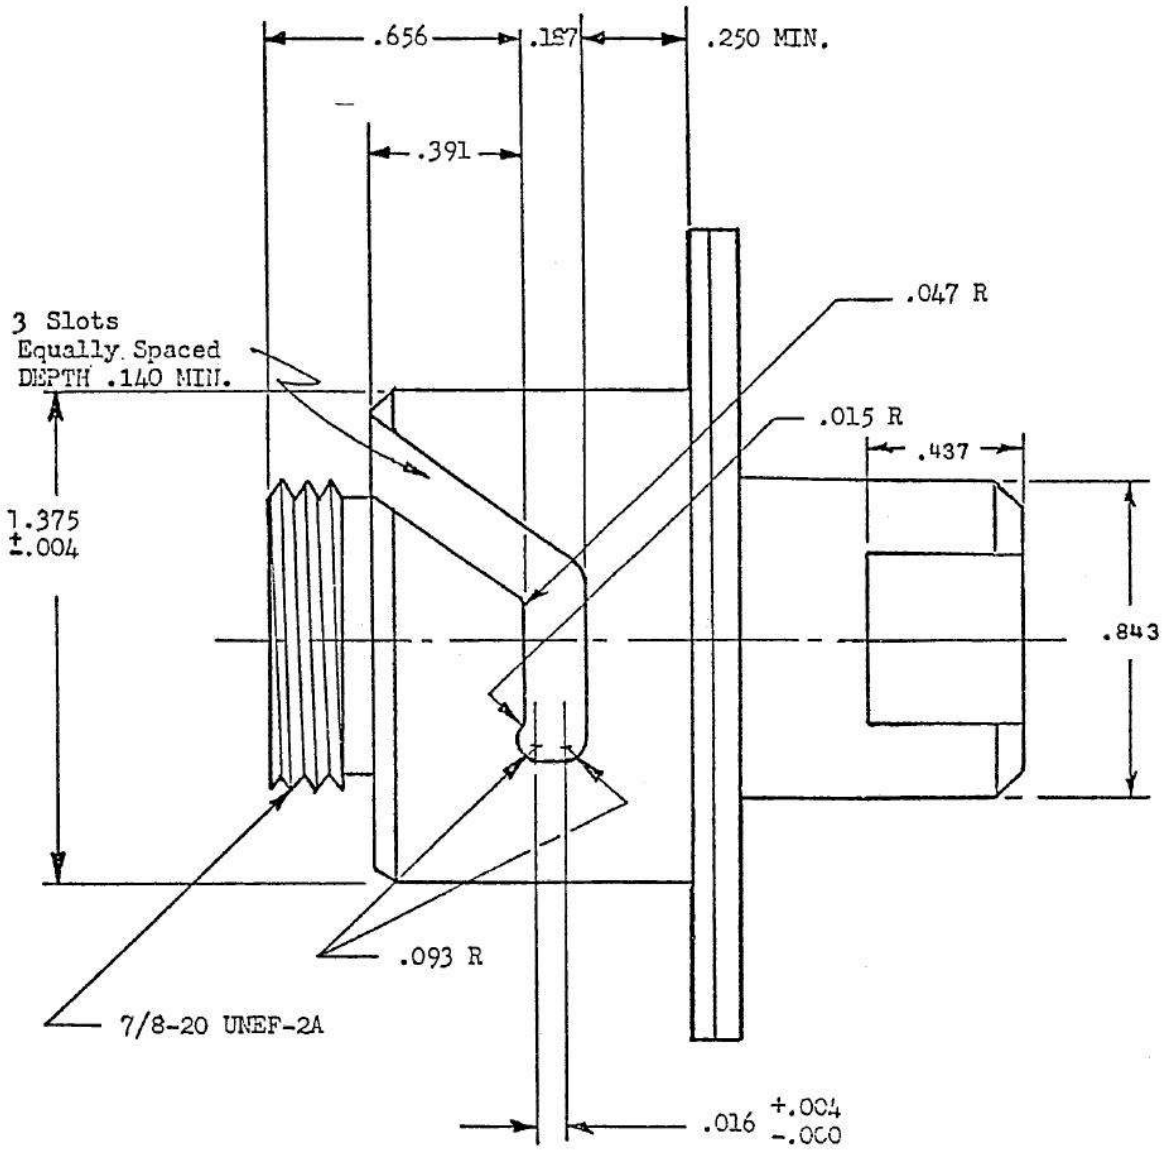


FIGURE 3. Critical dimensions – mating portion of valve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

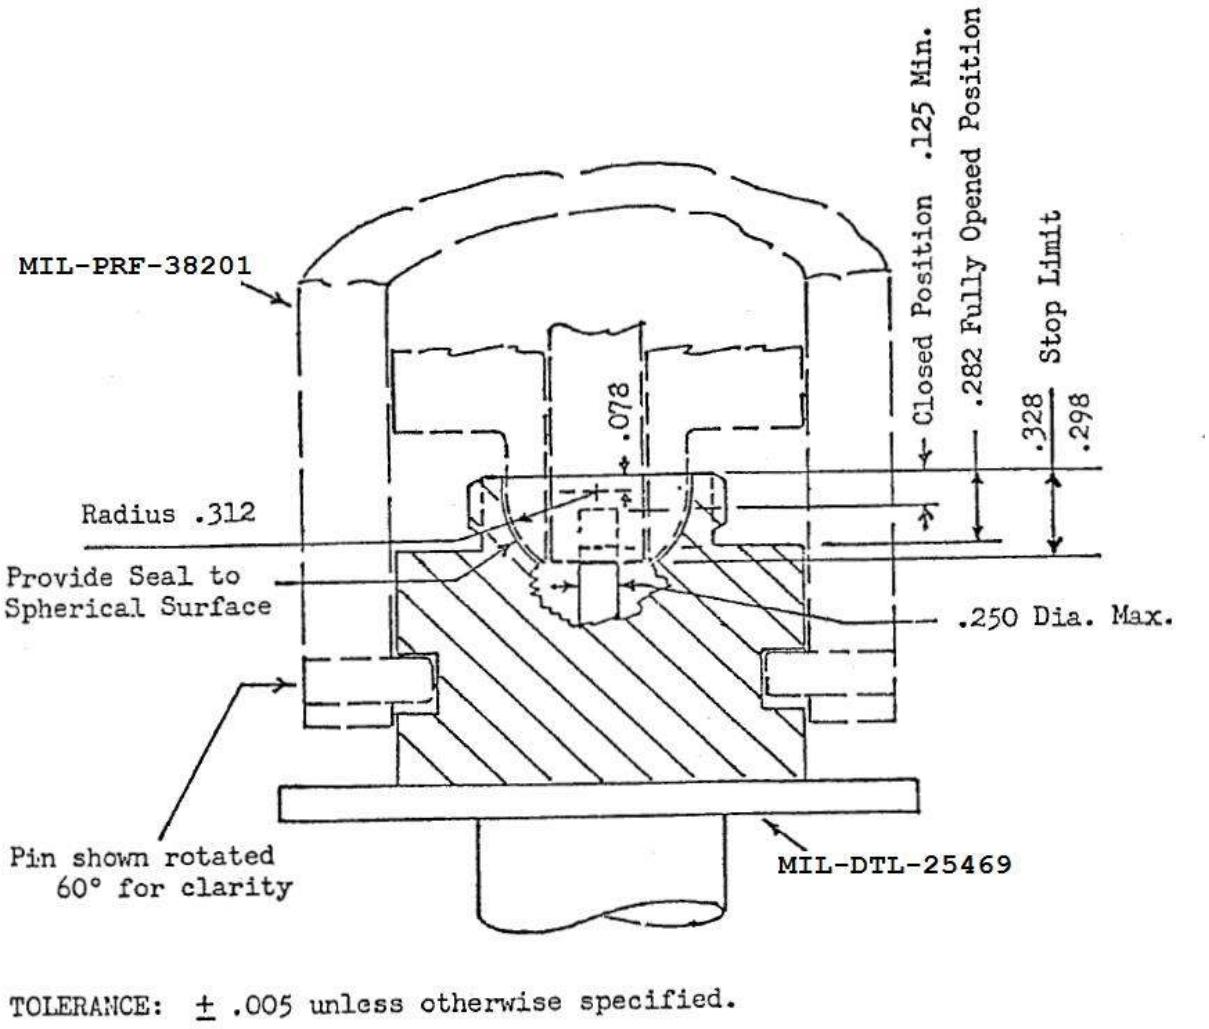


FIGURE 4. Seal and striker requirements.

b. A striking mechanism to actuate the poppet when the valve is mated with the female filler valve by contacting the striker surface of the poppet in the female valve.

c. A positive stop to limit retraction of the striker in the aircraft valve and force open the poppet of the female valve.

3.6.4.1 Valve operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

a. Disengaged – the valve shall be closed

b. Engaged with the female filler valve

(1) Primary phase – The valve shall be closed. It shall be engaged in the J slots and clear the interface envelope defined in MIL-PRF-38201.

(2) Final phase – The valve shall be fully opened by the striking mechanism upon contact with the striking surface of the female filler valve poppet. The striker must open the aircraft filler valve poppet with the application of less than four pounds force applied by resistance to the female filler valve poppet. The striker shall be at its limiting retracted position when fully engaged and when so located, it shall cause the poppet in the female valve to be depressed to its fully open position.

c. At disengagement – When the seal of the female valve is retracted upon release from the final phase, the aircraft valve will close and clear the striker of the female valve while still engaged with the J slots. Removal from the J slots is the last step in the disengagement sequence.

3.6.5 Degreasing. All component parts of the valve shall be degreased by vapor degreasing with trichloroethane conforming to ASTM-D4126. These parts may also be degreased by ultrasonics, or by immersing and scrubbing or by pressure spraying with a cleaning compound (trichlorotrifluoroethane) conforming to MTL-C-81302. After completion of the cleaning and when assembled, a General Electric, Type H leak detector or an equivalent halide testing apparatus shall be used to determine the absence of the cleaning compound. The valves should then be packaged immediately.

3.6.6 Plugs. All openings in the valve shall be closed with plugs to prevent dust and foreign matter from entering the valve during shipment and storage. Threaded plugs shall conform to SAE-AS4863, except that the material shall be a suitable plastic.

3.6.7 Threads.

3.6.7.1 Screw threads. Unless otherwise specified, machine screw threads shall conform to MIL-S-7742. The screws and nuts used in assembling the valve shall be securely locked by means of lock-washers, locknuts, or other suitable methods.

3.6.7.2 Pipe threads. Pipe threads shall be in accordance with SAE-AS71051.

3.6.8 Antiseize tape. Antiseize tape conforming to A-A-58092 shall be used on all male pipe thread fittings. The tape shall not be used on flared tube fittings, straight threads, coupling sleeves, or on the. outside of the tube flares. None of the tape shall be allowed to enter the inside of a fitting.

3.7 Performance.

3.7.1 Leakage. When tested as specified in 4.7.1, the leakage through the valve shall not exceed

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

0.02 liter per minute with the cap removed (see 4.7.1).

3.7.2 Leakage at proof pressure. The valve shall pass the leakage test specified in 4.7.6.

3.7.3 High and low temperature. The valve shall pass the 260°F and -65°F temperature tests specified in 4.7.2.

3.7.4 Extreme low temperature. The valve shall pass the extreme low temperature test specified in 4.7.3.

3.7.5 Vibration. The valve shall pass the vibration test specified in 4.7.4.

3.7.6 Pressure drop. When tested as specified in 4.7.5, the pressure drop through the valve with the poppet manually held open shall not exceed 5 inches of water.

3.8 Interchangeability. All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation drawing number requirements of ASME-Y14.24, ASME-Y14.34M, ASME-Y14.35M and ASME-Y14.100.

3.9 Weight. The total weight of the valve assembly shall not exceed 0.75 pound.

3.10 Identification of product. Each valve shall be permanently marked in accordance with MIL-STD-130, except that the Federal Stock Number shall be omitted from the name plate.

3.11 Workmanship. The valves shall be uniform in quality and shall be free from irregularities, defects, or foreign matter which could adversely affect safety, performance, reliability, or durability.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (4.2)
b. First article inspection (4.3)
c. Conformance inspection (4.4)

4.2 Qualification inspection. Qualification inspection shall consist of performing all examinations and tests specified herein.

4.2.1 Qualification inspection report. Three copies of the qualification inspection report prepared in accordance with MIL-HDBK-831 should be forwarded with the qualification sample (see 4.2.2).

4.2.2 Qualification samples. Qualification samples shall consist of four valve assemblies. All

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

of the qualification samples shall be subjected to all of the tests specified in 4.7. The tested samples shall be identified with the manufacturer's part number and shall be forwarded together with the qualification inspection reports to the activity responsible for testing as designated (see 6.3).

4.3 First article inspection.

4.3.1 Samples. First article samples shall consist of two valves representative of construction, workmanship, components, and materials used during production.

4.3.2 Test report. A test report giving results of the first article inspection should be prepared in accordance with MIL-HDBK-831 and forwarded to (together with the tested samples) to the contracting activity (see 6.2).

4.3.3 Tests. The first article tests shall consist of the following:

a. Examination of product (see 4.6.1)
b. Examination of dimensions (see 4.6.2)
c. Leakage (see 4.7.1)
d. Extreme low pressure (see 4.7.3)
e. Pressure drop (see 4.7.5)
f. Leakage at proof pressure (see 4.7.6)

4.4 Quality conformance inspection. The quality conformance inspection shall consist of the individual inspection and the sample inspection.

4.4.1 Individual inspection. Each valve shall be subjected to the following examination of tests. Any valve containing a defect or failing to pass the examination or test shall be rejected.

a. Examination of product (see 4.6.1)
b. Leakage (see 4.7.1)
c. Pressure drop (see 4.7.5)

4.4.2 Sample inspection.

4.4.2.1 Lot. A lot shall consist of 500 valve assemblies, or any fraction thereof, manufactured under the same conditions and of the same material, and submitted for acceptance at the same time.

4.4.2.2 Sampling. Valves shall be selected in accordance with MTL-STD-1916, inspection level I from each lot specified in 4.4.2.1. A sample unit for all tests, except preparation for delivery (4.8), shall be one valve assembly. A sample unit for preparation for delivery shall be one fully packaged shipping container with valves preserved, packaged, and packed as specified herein, except that the container need not be sealed. Failure on any valve to pass any test specified in 4.4.2.3, except preparation for delivery, shall be cause for rejecting the lot. Acceptance of preparation for delivery of a lot shall be based on Acceptable Quality Level of 2.5 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

defective.

4.4.2.3 Tests. Sample selected as specified in 4.4.2.2 shall be subjected to the following:

a. Examination of dimensions (see 4.6.2)
b. Extreme low temperature (see 4.7.3)
c. Leakage at proof pressure (see 4.7.6)
d. Preparation for delivery (see 4.8)

4.5 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in this specification.

4.5.1 Atmospheric conditions. Unless otherwise specified, tests shall be conducted at local ambient temperature and barometric pressure shall be recorded at the time, of inspection. This information shall he available for computation of test data, where required, to normal temperature and pressure conditions. Normal temperature and pressure conditions are 70 degrees Fahrenheit and 29.92 inches of mercury. Test instruments shall be calibrated or adjusted as required for their usage in conducting the applicable tests.

4.5.2 Oxygen. Oxygen used in testing the valve shall conform to MIL-PRF-27210, type I or II, as applicable.

4.6 Examinations.

4.6.1 Examination of product. Each valve shall be carefully examined to determine conformance to this specification with respect to material, workmanship, design and construction, marking, degreasing, and other requirements not covered by tests.

4.6.2 Examination of dimensions. The valve shall be examined to determine if the dimensions are as specified herein.

4.6.3 Disassembly and examination. As the conclusion of the test specified herein or after any test in which valve failure indicates faulty construction, the valve shall be disassembled and examined. The valve shall not show evidence of excessive deterioration or wear due to testing which might affect the valve performance.

4.7 Test methods. The tests shall be performed in the sequence presented herein.

4.7.1 Leakage. With the cap removed, pressures of 1, 10, 70 and 300 psi shall be applied to the valve through the 0.25 inch pipe connection. While pressure is applied to the valve, the leakage through the valve shall not exceed 0.02 liter per minute.

4.7.2 High and low temperature. The valve shall be exposed to a temperature of 260° ±5°F for 4 hours and to a temperature of -65° ±5°F for 4 hours. Immediately after exposure to each of these temperatures, the valve shall be subjected to and pass the test specified in 4.7.1.
4.7.3 Extreme low temperature. The valve, fitted to a 300 psi working pressure converter in an

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

assimilated aircraft manner, shall be connected to the mating valve conforming to MIL-PRF-38201 and a flow of liquid oxygen shall be established and stabilized through the connected valves for not less than three minutes at 20 to 40 psi. Following the three-minute period of stabilized flow and while still flowing, separate minimum forces of 13 pounds shall be applied at the rear of the female filler valve (to the 0.75 thread portion) in longitudinal and lateral directions with respect to the major axis of the female filler valve, and a visual examination shall be made to determine leakage of liquid oxygen. There shall be no more than momentary leakage during this test. The flow shall be terminated by rapidly disconnecting the female filler valve. There shall be no evidence of leakage of liquid oxygen from the valve following disconnection. Back leakage through the valve shall be measured as the converter pressure is built up throughout the entire range from 0 to 300 psi. Gaseous leakage through the valve after one minute following disconnection and start of buildup conditions shall not exceed 0.02 liters per minute at any time during or subsequent to the buildup interval measured at ambient conditions or stated in paragraph 4.5.1.

4.7.4 Vibration. The valve shall be mounted in the normal installed position to a vertical support and circularly vibrated for 3 hours. The vibration shall be circular motion of 0.018 to 0.020 inch diameter, and the frequency varied from 10 cycles per second (cps) to 50 cps and back to 10 cps in periods of approximately 1 minute. During this vibration, the valve shall be pressurized to 300 psi of oxygen. The valve cap shall be removed during the first 1.50 hours and installed during the last 1,50 hours. Upon completion of the vibration test, the valve shall be subject to and shall pass the examination specified in 4.7.1.

4.7.5 Pressure drop. The pressure drop of the valve shall be determined by means of a test setup which will have a pressure drop not greater than 1 inch of water when a flow of 40 liters per minute is applied at the point of the installation of the valve. The pressure drop shall not exceed 5 inches of water when the flow is applied through the 0.25 inch pipe connection. Manual opening of the valve poppet to its maximum amount will be performed during the pressure drop test.

4.7.6 Leakage at proof pressure. A pressure of 500 psi shall be applied to the valve. The pressure shall be applied through the 0.25 inch pipe connection. There shall be no leakage through the body. With the cap removed and pressure applied to the valve, the leakage through the valve shall not exceed 0.02 liters per minute. After the test, the valve shall be subjected to and shall pass the examination specified in 4.6.1, and test specified in 4.7.1.

4.7.7 Reliability. The reliability of the equipment shall be expressed in terms of 90 percent confidence that the MCBF shall he equal to or greater than 700 cycles. The equipment shall be operated under normal cyclic operation. Normal cyclic operation shall be defined as accomplishment of the sequency of operational events in a manner most representative of actual usage conditions. (A cycle shall consist of connecting the valve to a female filler valve conforming to MIL-PRF-38201, flowing liquid oxygen through the mated valves, disconnecting the valves, and applying 300 psi back pressure to the valve between connections). Each of the four qualification samples will be cycled until failure or until 800 cycles are completed. A failure is considered any visible evidence of leakage. Also, upon completion of each 400 cycles, each valve shall be subject to and shall pass the examination specified in 4.7.3. Reliability

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

qualification will consist of meeting the accept/reject criteria of test plan I of MIL-HDBK-781.

4.8 Packaging. Packaging shall be examined for conformance to Section 5.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The liquid oxygen filler valves are intended for use in 70 and 300 psig liquid oxygen systems in aircraft.

a. This valve is not to be used in new design. For new design procurement use MIL-PRF-25961.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification
b. Whether first article inspection is to be performed for production contracts. If first article inspection is specified, include instructions for submitting test reports and samples. Include first article test reports on DD Form 1423 (see 6.3).
c. Selections of applicable levels of preservation, packaging, and packing (see 5.1).
d. Date requirements (see 6.3).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL-25469 whether or not such products have actually been listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Oklahoma City Air Logistics Center/ENSDAA (AF-71), 3001 Staff Drive, Suite 1AB81A, Tinker AFB, OK 73145 or email ocalc.dsp@us.af.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.

6.4 Qualification test data. The manufacturer should submit engineering drawings and inspection reports in accordance with Defense Standardization Program document SD-6 Provisions Governing Qualification.

6.5 Data. For the information of contractors and contracting officers, any of the data specified in applicable documents listed in section 2 of this specification or referenced in lower-tier documents need not be prepared for the Government and will not be required by the Government unless specified in the contract or order. The data to be furnished will be listed on DD Form 1423 (Contractor Data Requirement List), which will be attached to and made a part of the contract or order. Nav-Air Form 4211/25 (Drawing, Lists, and Specifications Required) will be attached where applicable.

6.6 Definitions. Reliability terms are defined in MIL-STD-721.

6.7 Subject term (key word) listing.

Breathing
Cox
Poppet

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.9 Concluding material.

Custodians:
Air Force - 71
Navy - AS

Preparing activity:
Air Force - 71

(Project 4820-2015-006)

Reviewer activities:
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:08Z
Check the source to verify that this is the current version before use.