FEDERAL SPECIFICATION

CORK PRESSERS, ROTARY

This specification was approved on the above date by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—Cork pressers covered by this specification are used to knead and soften cork stoppers so that they may be inserted with greater ease, and serve more effectively as closures.

1.2 Type.—Cork pressers shall be of but one type.

2. APPLICABLE SPECIFICATIONS

2.1 There are no other specifications applicable to this specification except those referenced in section 7 by individual departments.

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by postal note, money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Prices may be obtained from the Superintendent of Documents.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Metal parts.*—Metal parts shall be made of a good grade of cast iron, steel or aluminum casting.

3.1.2 All castings shall be commercially machinable.

3.1.2.1 Castings shall not be repaired, plugged, or welded without permission from the purchaser. Such permission will be given only when the defects are small and do not adversely affect the strength, use, or machinability of the casting.

3.1.3 *Breaking loads.*—The breaking load shall be not less than 1,150 pounds on a 0.875-inch-diameter bar with a 12-inch span; 2,000 pounds on a 1.2-inch-diameter bar with an 18-inch span; and 7,600 pounds on a 2.0-inch diameter bar with a 24-inch span.

3.1.4 *Wood.*—The wood shall be one of the following species:

Oak	Maple
Birch	Pecan
Beech	

3.2 Presser.—The presser shall be of the rotary-type suitable for use on corks up to 1¼ inches in top diameter. The presser shall consist of a pressing wheel with lever attached, a shoe and shoe support, and a base. (See fig. 1 and 6.3.)

3.2.1 *Pressing wheel with lever.* — The pressing wheel with lever shall consist of a vertically placed wheel, the rim of which shall be a right-angled cross section of a cone. The larger diameter shall be approximately 4¾ inches, and the smaller diameter approximately 4½ inches. The rim shall be approximately 1¼ inches wide, and shall be suitably corrugated or ribbed on its outside surface to afford a firm grip upon the cork to be pressed, without slipping or damaging the cork. A lever shall be integrally attached to the outside of the rim by casting or welding, and shall be not less than 5½ inches in length. It shall be so constructed as to provide a comfortable handgrip and shall in all other respects be suitable for the purpose for which it is intended. The hub shall be suitably constructed for properly mounting the wheel upon the frame with the axis horizontal.

901684—50—(74)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

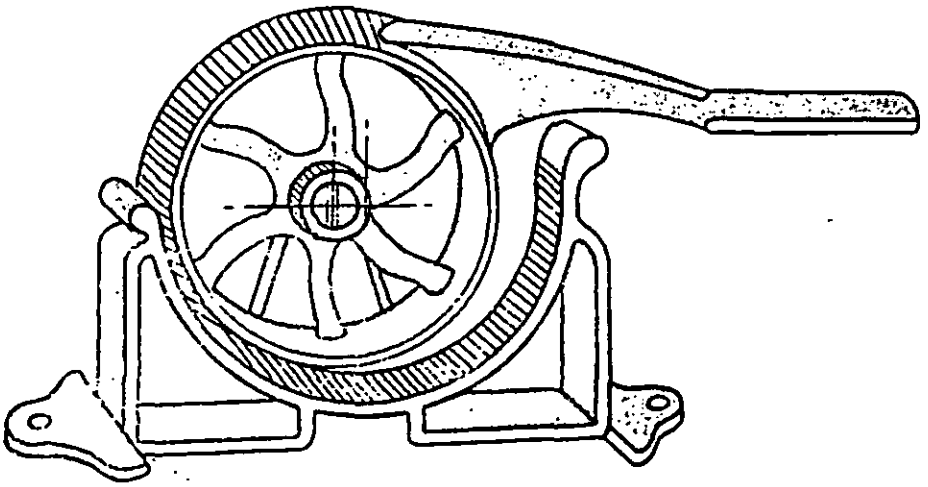


FIGURE 1.—Cork presser, rotary. (Not to scale.)

3.2.2 *Shoe and shoe support.*—A concave shoe and shoe support with corrugations similar to those on the wheel shall be provided. The shoe shall be approximately 1¼ inches wide, shall be in the form of a right-angled cross section of a cone, and the surface facing the pressing wheel shall be corrugated. The shoe shall be supported at the ends and in the center. The shoe shall form approximately a half-circle. It shall be mounted in the same plane as the wheel but eccentrically centered so that the maximum distance between the outside of the wheel rim and the inside of the shoe shall evenly vary from a minimum of approximaely 3/16 inch to a maximum of approximately 1¼ inches. The wheel mounting shall be an integral part of the shoe support and shall be so constructed that the wheel hub will be mounted properly on a horizontal axle. The shoe support shall be drilled for mounting on a wood base as specified in 3.2.3.

3.2.3 *Base.*—The base shall consist of a hardwood block approximately 11½ inches long, 3 inches wide, and approximately ⅝ inch thick, upon which the frame shall rest and shall be firmly affixed thereto by screws. A base of conventional design of cast iron or steel is also acceptable.

3.3 **Variations.** — While it is anticipated that the makes of the different manufacturers may show variations, it is to be understood that the cork pressers furnished will conform in general to the specified details and dimensions to a degree consistent with the function for which they are intended.

3.4 **Workmanship.** — The workmanship shall be first class. The cork presser shall function smoothly and evenly in the manner in which it is intended.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Sampling.**—Unless otherwise specified, one presser shall be taken at random from each shipment for inspection purposes.

4.2 **Inspection.** — Unless otherwise specified, inspection shall be made at the point of delivery.

5. PREPARATION FOR DELIVERY

5.1 **Packaging.** — Unless otherwise specified, commercial packages will be acceptable.

5.2 **Packing.**—The subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maxi-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

mum protection from normal hazards of transportaion.

5.3 Marking.—Shipping containers shall be marked with the stock number, nomenclature, unit, quantity, and the name of the manufacturer.

6. NOTES

6.1 Ordering data.—Purchasers should exercise any desired options offered herein. (See 4.1, 4.2, 5.1, 5.2, and 6.2.)

6.2 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

6.3 Figure 1 is not to be considered restrictive as to details of design; it is furnished only to amplify the text and any press conforming to the requirements of the text should be considered in compliance with this specification.

6.4 Federal specifications do not include all types, classes, grades, sizes, etc., of the commodities indicated by the titles of the specifications, or which are commercially available, but are intended to cover the types, etc., which are suitable for Federal Government requirements.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. REQUIREMENTS APPLICABLE TO INDIVIDUAL DEPARTMENTS

7.1 The following departmental specifications and other publications, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.2 Army and Navy.

7.2.1 *Applicable specifications and other publications.—*

Federal Specifications:

NN–B–601—Boxes, Wood-Cleated-Plywood, for Domestic Shipment.
NN–B–621—Boxes, Wood, Nailed and Lock-Corner.
NN–B–631—Boxes, Wood, Wirebound (for Domestic Shipment).
LLL–B–631—Boxes; Fiber, Corrugated (for Domestic Shipment).
LLL–B–636—Boxes; Fiber, Solid (for Domestic Shipment).

Military Specifications:

JAN–P–105—Packaging and Packing for Overseas Shipment — Boxes, Wood, Cleated, Plywood.
JAN–P–106—Packaging and Packing for Overseas Shipment — Boxes; Wood, Nailed.
JAN–B–107—Boxes, Wood, Wirebound (Overseas Type).
JAN–P–125—Packaging and Packing for Overseas Shipment — Barrier-Materials, Waterproof, Flexible.
JAN–P–140—Packaging and Packing for Overseas Shipment — Adhesives, Water-Resistant, Case-Liner.

U. S. Army Specification:

100–2 —Standard Specification for Marking Shipments by Contractors.[1]

Navy Department Specification:

General Specifications for Inspection of Material.[2]

[1] Applicable to Army purchases only.
[2] Applicable to Navy purchases only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

Bureau of Supplies and Accounts Publication:

Navy Shipment Marking Handbook.[3]

(Copies of specifications required for Army purchases may be obtained upon application to the procuring agency. Both the title and identifying symbol or number should be stipulated when requesting copies.

(Copies of Federal and Military specifications required for Navy purchases, Navy Department specifications, and the Navy Shipment Marking Handbook may be obtained without cost upon application to the Bureau of Supplies and Accounts, Navy Department, Washington 25, D. C., except that activities of the Armed Forces should make application to the Commanding Officer, Naval Supply Center, Norfolk 11, Virginia. Both the title and identifying symbol or number should be stipulated when requesting copies of specifications.)

7.2.2 *Packaging.*—One cork presser complete constitutes one unit. Each unit shall be packaged in a carton of appropriate size conforming to the requirements of Federal Specification LLL–B–631 or LLL–B–636. Each carton shall be adequately secured to prevent accidental opening. The carton shall contain sufficient cushioning material (kimpak, cellulose, excelsior, die cut pads, cells, etc.) to insure against shifting or breakage.

7.2.3 *Packing.*

7.2.3.1 *Domestic.*—Twenty-four packaged units shall be packed in a shipping container conforming to the requirements of Federal Specifications NN–B–601, NN–B–621, and NN–B–631.

7.2.3.2 *Overseas.*—Twenty-four packaged units shall be packed in a shipping container designed for type 2 load, and conforming to the requirements of Military Specifications JAN–P–105, JAN–P–106, or JAN–B–107. Closure and strapping shall comply with the appendix to the applicable specification. Each box shall be lined with a sealed waterproof bag, or its equivalent, fabricated from material conforming to requirements of Military Specification JAN–P–125. Seams and closures shall be sealed with a water-resistant adhesive conforming to the requirements of Military Specification JAN–P– 140.

7.2.3.3 *Packing variation permitted.*—If the number of units in any shipment is not the exact multiple of the number specified to be contained in each shipping container, the units not constituting the nearest such multiple shall be packed in a shipping container of suitable size and design and so constructed as to insure safe delivery to specified destination.

7.2.4 *Marking.*

7.2.4.1 *Interior packages.*—Each package shall be marked with the stock number, nomenclature, unit, quantity, and the name of the contractor.

7.2.4.2 *Shipping containers.*

7.2.4.2.1 *Army.*—Shipping containers shall be marked in accordance with the requirements of U. S. Army Specification 100–2.

7.2.4.2.2 *Navy.*—Shipping containers shall be marked in accordance with the requirements of the Navy Shipment Marking Handbook.

7.2.5 *Ordering data.* — Requests, requisitions, schedules, and contracts or orders should specify whether the subject commodity is to be packed and shipping containers marked for domestic or overseas shipment. (See 7.2.3 and 7.2.4.)

NAVY: MS

[3] Applicable to Navy purchases only.

This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog.

Copies of this specification may be purchased for $.50 cents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.