METRIC

GGG-G-521E
27 July 1988
SUPERSEDING
GGG-G-521D
May 16, 1983

FEDERAL SPECIFICATION

GOGGLES, INDUSTRIAL, RESILIENT FRAME

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers industrial, eye protective, resilient frame goggles.

1.2 Classification. Resilient frame goggles shall be of the following types and styles, as specified (see 6.2.1):

Type I - Ventilated.

Style A - Dual lens.
Style B - Single lens.

Type II - Nonventilated.

Style A - Dual lens.
Style B - Single lens.


1.2.1 Specification part number. The goggles shall be identified by a definitive part number as shown in the following example:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

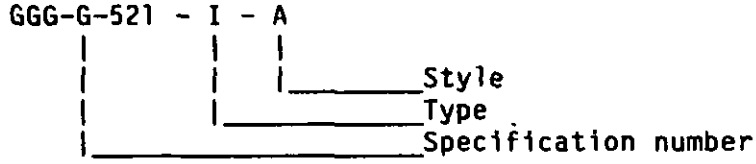

2. APPLICABLE DOCUMENTS

2.1 Government publications The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Standards

FED-STD-123 - Marking for Shipment (Civil Agencies)
FED-STD-406 - Plastic, Methods of Testing

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards, and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

(Federal Government activities may obtain copies of Federal standardization documents, and the Index of Federal Specifications, Standards, and Commercial Item Descriptions from established distribution points in their agencies.)

Military Specification

MIL-P-116 - Preservation; Methods of

Military Standards

MIL-STD-105 - Sampling Procedures and Tables for Inspection Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-2073-1A - DoD Materiel Procedures for Development and Application of Packaging Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

(Copies of military specification and standards required by contractors in connection with specific acquisition functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM)

B117 - Salt Spray (Fog) Testing
D412 - Rubber Properties in Tension
D573 - Rubber-Deterioration in an Air Oven
D624 - Rubber Property - Tear Resistance
D2240 - Rubber Property - Durometer Hardness
D3951 - Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specifications sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2.1), the contractor shall furnish a pair of goggles for first article inspection and approval (see 4.2.1 and 6.3).

3.2 Standard commercial product. The goggles shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the goggles being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.3 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the products covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification.

3.3.1 Cleaning and sanitization. All materials shall not deteriorate or discolor when tested as specified in 4.5.3.

3.3.2 Corrosion resistance. All material shall show no impairment when tested as specified in 4.5.4.

3.4 Description. The goggles covered by this specification shall have resilient frames made to be worn over conventional-type spectacles or directly over the eyes. The goggles may be ventilated or nonventilated as required by their intended use. When chemical goggles are ventilated, the openings shall be baffled or screened to prevent the direct passage of dust or liquids into the interior of the eyecups. The goggles shall have a positive means of support on the face, such as an adjustable headband or other suitable means of support, to retain the frame comfortably and snugly in place in front of the eyes.

3.5 Types and styles.

3.5.1 Type I, style A. Type I, style A goggles shall be ventilated in a manner to permit circulation of air.

3.5.1.1 Type I, style A components. Type I, style A goggles shall consist of essentially resilient frame, dual lenses, and headband:

a. Resilient frame. Frame shall be molded of resilient material such as natural or synthetic rubber or plastic that is nontoxic and nonirritating to the skin as specified (see 6.2.1). When rubber is used it shall conform to the physical properties shown in table I when tested as specified in 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

TABLE I. Physical properties of rubber.

	Before aging 1/	After aging 1/ (percent change) (maximum)
Ultimate tensile strength (MPa*) (minimum)	8.3	-25
Ultimate elongation (percent) (minimum)	550	±25
Permanent set 2/ (percent) (maximum)	20	±25
Tear strength (kilonewtons per meter) (minimum)	26.2	-25
Hardness durometer A	50 ± 7	±10

1/ See 4.5.1
2/ After 400 percent elongation for 10 minutes and rested 10 minutes
* Megapascals

When the frame material is plastic it shall be clear, translucent, colored or opaque, and shall have the physical properties shown in table II when tested as specified in 4.5.1. The plastic frame material shall not burn at a rate greater than 76 millimeters (mm) per minute when tested as specified in 4.5.2.3.

TABLE II. Physical properties of plastic.

Ultimate tensile strength (MPa) (minimum)	11.0
Ultimate elongation (percent) (minimum)	325
Hardness durometer A	70 ± 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

b. Lenses. Lenses for style A goggles shall be not less than 3.0 mm nor more than 3.8 mm in thickness. Lenses shall be made from single, solid-glass plate of a grade suitable for optical use. Lenses shall be free from striae, waves, or other visible defects which will impair their optical qualities. The optical surfaces shall be polished and shall be free from visible surface defects. Lenses shall be heat treated or chemically tempered. After subjection to the the impact resistance test of 4.5.2.1, lenses shall not crack, fracture, chip, or be ejected completely from the frame.

c. Headband. The headbands for style A goggles shall be made of molded natural rubber, synthetic rubber, or of elastic webbing and shall be not less than 11 mm wide. Means shall be provided for adjustment to fit all head sizes and for detachment of headband from the goggle frame.

3.5.2 Type I, style B. Type I, style B goggles shall be ventilated in a manner to permit circulation of air.

3.5.2.1 Type I, style B components. Type I, style B goggles shall consist essentially of resilient frame, single lens, and headband:

a. Resilient frame. Requirements for style B, goggle frame shall be the same as those specified in 3.5.1.1 for style A.

b. Lens. The lens of style B goggles shall be not less than 136 mm long (outside measurement) at the longest dimension and not less than 55 mm wide (outside measurement) at the widest dimension. The lens shall be not less than 1.27 mm nor greater than 1.52 mm thick. Lens shall be of transparent plastic of optical quality, free from striae, waves, or other visible defects which might impair the optical qualities. The optical surface of the lens shall be free from visible surface defects. The lens shall not crack, fracture, chip, or be ejected completely from the frame when tested as specified in 4.5.2.1. The lens shall not be pierced through from the impact when tested as specified in 4.5.2.2. The material shall not burn at a rate greater than 76 mm per minute when tested as specified in 4.5.2.3.

c. Headband. The headbands for style B goggles shall comply with the headband requirements for style A goggles.

3.5.3 Type II, style A. Type II, style A goggles shall conform to the requirements for type I, style A goggles (see 3.5.1), except the frames shall have no ventilating openings, and the lenses shall have a means to prevent fogging (see 4.5.5).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

3.5.4 Type II, style B. Type II, style B goggles shall conform to the requirements for type I, style B goggles (see 3.5.2), except the frame shall have no ventilating openings, and the lens shall have a means to prevent fogging (see 4.5.5).

3.6 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.7 Identification marking. The box (see 3.8), in which the goggles are packaged shall be marked to show the name of the manufacturer and the name and letters or numbers by which the goggles are designated for trade purposes, and when specified (see 6.2.1), other marking as specified by the procurement activity. The marking shall be permanent type marking applied in accordance with the manufacturer's standard practice.

3.8 Box. When specified (see 6.2.1), a box of the manufacturer's latest commercial standard design shall be furnished with each goggle.

3.9 Workmanship. The quality of workmanship shall be such as to produce goggles that are in accordance with the requirements of this specificaiton and are so constructed as to insure proper functioning of all parts of the unit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4.2.1 First article inspection. The first article inspection shall be performed on two pair of goggles when a first article is required (see 3.1 and 6.2.1). This inspection shall include the examination of 4.4 and the tests of 4.5. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. Quality conformance inspection shall be performed on the sample goggles selected in accordance with 4.3. This inspection shall include the examination of 4.4 and the tests of 4.5, and the preparation for delivery inspection of 4.6.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one complete pair of goggles. All units of the same type and style offered for delivery at one time shall be considered a lot for the purpose of inspection. For purposes of sampling of materials, a lot shall consist of a single batch of rubber or plastic compound used in the goggle frames.

4.3.1 Sampling for examination. Examination shall be based on inspection level II and an Acceptable Quality Level (AQL) of 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.3.2 Sampling for tests. Tests shall be based on inspection level S-4 and an AQL of 2.5 percent defective.

4.3.3 Sampling (rubber or plastic compound). A sufficient number of test panels (150 mm x 150 mm x 2 mm) shall be molded from each lot to provide specimens for determining the tensile strength, elongation, permanent set, hardness and tear resistance in accordance with 4.5.1. Sample panels shall be selected at random from each lot (see 4.3) and subject to the test of 4.5.1.

4.3.4 Sampling for sanitization and corrosion resistance tests. Two sample goggles shall be randomly selected from the lot for the sanitization test of 4.5.3 and the corrosion resistance test of 4.5.4.

4.4 Examination. Each pair of goggles selected shall be examined to determine conformance with the requirements of this specification for defects listed in table III.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects.

Classification	Defects
Critical	None defined.
Major:	
101	Type and style not as specified.
102	Frame, optical properties, and headbands not as specified.
103	Plastic material for lens not optical quality.
104	Dimensions not as specified.
105	Ventilation not as specified.
Minor:	
201	Marking not as specified.
202	Workmanship not as specified.

4.5 Tests. Each pair of goggles selected shall be tested as specified in 4.5.1 through 4.5.5. Any sample failing to pass the specified tests shall be cause for rejection.

4.5.1 Rubber or plastic compound. Rubber or plastic sheets, prepared in accordance with 4.3.3 shall be subjected to the following applicable ASTM tests:

Test	ASTM
Tensile strength 1/	D412
Ultimate elongation 1/	D412
Tear resistance	D624
Hardness durometer (A-Shore) 1/	D2240
Aging, 48-hour period, 100 degrees Centigrade (°C)	D573

For tensile strength and elongation tests, die A in ASTM D412 shall be used for cutting the specimens. For tear resistance test, die B in ASTM D624 shall be used.

1/ Indicates tests required for plastic compounds (see table II).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

4.5.2 Lens test.

4.5.2.1 Impact resistance test. The goggles shall be mounted on a wooden block of such size and shape as to fit the frame securely. A 25.4 mm diameter steel ball, weighing 68 grams (g) shall be dropped in a free fall from a height of 1.27 meters (m) onto the horizontal outer surface of the lens at the approximate eye position.

4.5.2.2 Penetration resistance test. The frame lens shall be supported on a wooden block of such size and shape as to fit the frame securely. A pointed projectile of suitable size, consisting of a new Singer No. 25 or equal size 135 x 17 needle, fastened into a holder weighing 44 g, shall be freely dropped, pointed downward, from a height of 1.27 m onto the horizontal outer surface of the lens at the approximate eye position. The projectile may be guided, but not restricted, in its perpendicular fall by being dropped through a tube extending to within 100 mm of the lens.

4.5.2.3 Flammability test. The FED-STD-406, method 2021, will be used to test flammability of plastics.

4.5.3 Sanitization test. Sample goggles selected in accordance with 4.3.4 shall be subjected to one of the following sanitization test methods specified in 4.5.3.1 through 4.5.3.4 (manufacturer's option). The manufacturer shall specify the cleaning and sanitizing material to be used in the test.

4.5.3.1 Method I.

a. Immerse for 10 minutes in an aqueous detergent solution maintained at a temperature of 43°C ± 2°C.
b. Immerse for 2 minutes in an aqueous sanitizing solution maintained at ordinary room temperature. Some suitable solutions are: a hypochlorite solution containing 5550 parts per million (ppm) chlorine, an iodine solution containing 50 ppm iodine, or a quaternary ammonium compound solution.
c. Rinse for 2 minutes in clean water maintained at ordinary room temperature.
d. Dry at ordinary room temperature.
e. Repeat a, b, c, and d for a total of 10 cleaning and sanitizing cycles.

4.5.3.2 Method II.

a. Immerse for 10 minutes in an aqueous solution of a cleaner-sanitizer, containing a combination of a cleaning agent and sanitizing agent, maintained at a temperature of 43°C ± 2°C.
b. Rinse for 2 minutes in clean water maintained at ordinary room temperature.
c. Dry at ordinary room temperature.
d. Repeat a, b, and c for a total of 10 cleaning and sanitizing cycles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4.5.3.3 Method III.

a. For 10 minutes, each exterior and interior surface shall be sprayed with an aqueous solution of a cleaner-sanitizer or wiped with a sponge wetted with an aqueous solution of a cleaner-sanitizer, containing a combination of a cleaning agent and a sanitizing agent, at ordinary room temperature.
b. Rinse for 5 minutes, all mentioned surfaces shall be sprayed with clean water or wiped by a sponge wetted with clean water at ordinary room temperature.
c. Dry all items at ordinary room temperature.
d. Repeat a, b, and c for a total of 10 cleaning and sanitizing cycles.

4.5.3.4 Method IV.

a. Immerse for 10 minutes in an aqueous detergent solution maintained at a temperature of 43°C ± 2°C.
b. Rinse for 2 minutes in clean water maintained at ordinary room temperature.
c. Dry at ordinary room temperature.
d. Expose for 10 minutes to an atmosphere of an antiseptic vapor or gas, such as ethylene oxide gas, at ordinary room temperature.
e. Rinse for 2 minutes in clean water maintained at ordinary room temperature.
f. Dry at ordinary room temperature.
g. Repeat a, b, c, d, e, and f for a total of 10 cleaning and sanitizing cycles.

4.5.3.5 Sanitization. Each sample after item has been subjected to the one of the tests of 4.5.3.1 through 4.5.3.4 shall be examined to determine conformance with the requirements of 3.3.1.

4.5.4 Corrosion resistance. Sample goggles selected in accordance with 4.3.4 shall be subjected to the test specified in ASTM B117. After 50 hours exposure, the function of the device shall not be impaired by corrosion. Failure of either sample to meet this requirement shall be cause for rejection of the lot.

4.5.5 Type II nonventilated goggle lens fog test. Nonventilated goggles selected shall be tested to assure conformance with the requirements of 3.5.3 and 3.5.4. The lens shall be rinsed with lukewarm water and dried with soft tissue then placed in a chamber at a temperature range of -2°C to 0°C for a minimum of 24 hours. The sample(s) shall be removed and exposed to a dry bulb temperature range of 15°C to 17°C with a relative humidity of 55 to 60 percent. Any visible fogging of the lens after 5 minutes exposure shall constitute failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4.6 Preparation for delivery inspection. An examination shall be made to determine compliance with the requirements of section 5. The sample unit shall be one unit pack prepared for shipment. Sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-2 with an AQL of 4.0 percent defective.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2.1).

5.1.1 Level A. Each pair of goggles shall be packaged method III in accordance with MIL-P-116. Cleaning and drying procedures shall also be in accordance with MIL-P-116. When a box is furnished in accordance with 3.8, and the packaged goggles meet the performance criteria of method III of MIL-P-116, no further unit protection is required.

5.1.2 Commercial. The goggles shall be packaged in accordance with ASTM D3951.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2.1).

5.2.1 Level A and B. Packing shall be in accordance with MIL-STD-2073. Containers shall be selected from Appendix C, table VII for the appropriate level.

5.2.2 Commercial. The goggles shall be packed in accordance with ASTM D3951.

5.3 Palletization. Material shall be palletized in accordance with MIL-STD-147 when the following criteria is met:

a. Load to consist of four or more unskidded containers; and
b. Load shall utilize a minimum of 80 percent of the pallet base.

5.4 Marking.

5.4.1 Civil agencies. Shipments to civil agencies shall be marked in accordance with FED-STD-123.

5.4.2 Military agencies. Shipments to military agencies shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The resilient frame goggles covered by this specification are intended for eye protection from splash, spray, or mist of chemicals, exposure to fine dust concentrations, and impact of flying

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

particles. Nonventilated (type II) resilient frame goggles are intended for eye protection from harmful acid and chemical vapors and any area where gastight goggles are required.

6.2 Ordering data.

6.2.1 Procurement requirements. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Title, number, and date of this specification.
b. Type and style of goggles required (see 1.2).
c. When first article is required for inspection and approval (see 3.1, 4.2.1, and 6.3).
d. If frame material is to be rubber or plastic (see 3.5.1.1).
e. If additional markings are required (see 3.7).
f. When box is required (see 3.8).
g. Level of preservation and packaging and level of packing required (see 5.1 and 5.2).

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.475-1 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data shall be delivered by the contractor in accordance with the contract or purchase order requirements.

6.3 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one pair of each type and style of goggles. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.4 Subject term (key word) listing.

Eye protection
Goggles
Industrial
Resilient frame

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:40Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - EA
Navy - YD
Air Force - 99

Review activities

Army - MD, SM
DLA - GS

User activities

Navy - MC, OS, SH

CIVIL AGENCY COORDINATING ACTIVIES:

GSA - FSS
NASA - JFK
USDA - AFS

PREPARING ACTIVITY:

Navy - YD

Project 4240-0547

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
GGG-G-521E	FEDERAL SPECIFICATION - GOGGLES, INDUSTRIAL, RESILIENT FRAME

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2025-10-26T12:40Z
Check the source to verify that this is the current version before use.