GGG-H-570a
January 19, 1965

SUPERSEDING
Int. Fed. Spec. GGG-H-00570 (GSA-FSS)
August 6, 1964

FEDERAL SPECIFICATION

HOLDER AND GUIDE, DRIVE PIN

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers the requirements for one type of holder and guide used for hand-hammering drive pins into dense material such as concrete and steel.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification.

Federal Specifications:

FF-P-395—Pin, Drive, Guided; and Pin, Drive, Powder Actuated.

QQ-S-741—Steel, Carbon: Structural Shapes, Plates, and Bars.

GGG-D-691—Drill, Masonry, Hand and Holder, Masonry Drill, Hand.

PPP-B-585—Boxes, Wood, Wirebound.

PPP-B-591—Boxes, Fiberboard, Wood-Cleated.

PPP-B-601—Boxes, Wood, Cleated-Plywood.

PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.

PPP-B-636—Box, Fiberboard.

PPP-T-60—Tape; Pressure Sensitive Adhesive, Waterproof—for Packaging and Sealing.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116—Preservation, Methods of.

MIL-B-121—Barrier Material, Greaseproofed, Flexible (Waterproofed).

MIL-L-10547—Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Illustration.** The illustration shown herein is for the convenience of identification and is not intended to preclude the purchase of holders which are otherwise in accordance with this specification.

3.2 **Materials.** The materials used in the construction of the holders shall be new and suitable for the purpose intended.

3.3 **Design.** The holder shall be similar to figure 1 and shall consist of a barrel, ram, and handgrip. It shall be designed to utilize the striking force of a 2½- to 3-pound hammer to drive fasteners (drive pins) into dense material such as steel or concrete. The design shall be such that drive pins can be loaded easily and quickly without the use of tools. Means shall be provided whereby the holder can be converted into a drill holder to accept tapered shank, twist flute, masonry drills conforming to GGG-D-691, type III, shank style A.

3.3.1 *Barrel.* The barrel shall be of high-grade, heat-treated, alloy steel. The barrel may be of one piece construction, or an assembly of several components. The barrel shall be provided with a finished bore to accurately accommodate the ram.

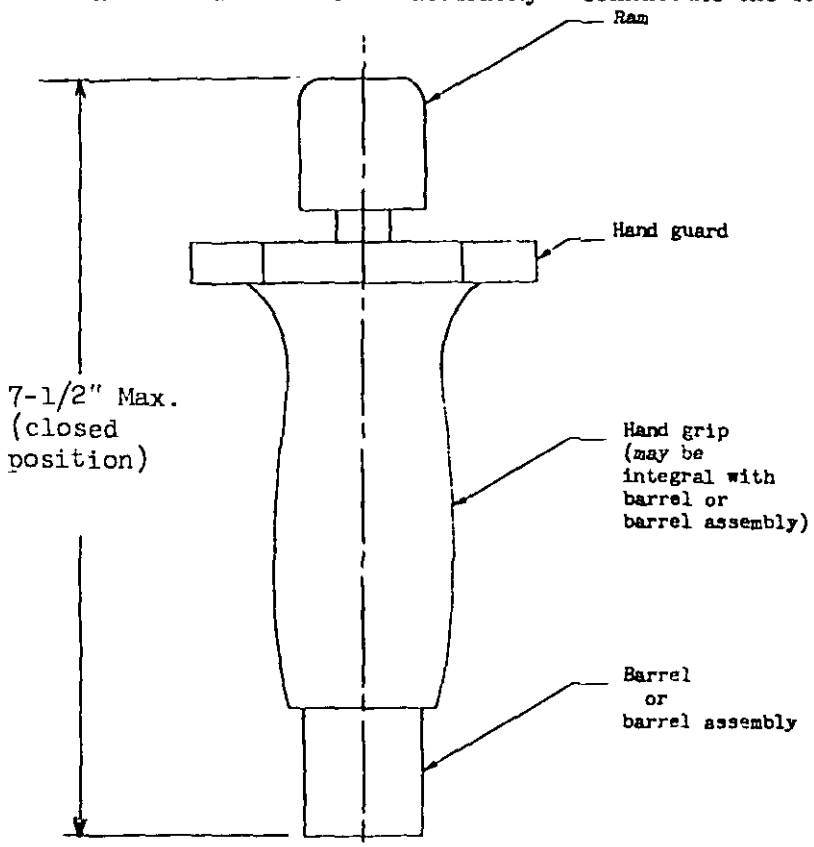


Figure 1. - Holder and guide, drive pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.3.2 *Ram.* The ram shall be of high-grade, heat-treated, alloy steel. The ram shall be accurately finished to fit the barrel and, when assembled as a complete tool, shall be capable of withstanding repeated blows with a 2½- or 3-pound hammer, when driving pins, without damage or distortion.

3.3.3 *Handgrip.* The handgrip shall be made of high-impact strength plastic or rubber composition capable of withstanding the accidental blow of a 2½- or 3-pound hammer without damage. The handgrip shall be well proportioned and of suitable size and design to provide a comfortable nonslip grip. The top of the handgrip shall be provided with a flange or enlarged portion to serve as a handguard. The handguard shall be provided with at least one flat surface that will prevent the tool from rolling off an inclined surface.

3.4 Drive pins. The holder shall be designed to drive pins which are in accordance with types I and II of FF-P-395.

3.5 Accessories. Accessories normally furnished in commercial practice, shall be furnished with each holder.

3.6 Repair parts. Manufacturers shall furnish repair parts when requested. All parts having the same manufacturer's part number shall be manufactured to definite standards, tolerances, and clearances in order that such parts may be completely interchangeable, replaced, or adjusted without modification.

3.7 Marking. Each holder shall be marked in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture can be readily identified.

3.8 Operating instructions. Each holder shall be furnished with complete operating instructions.

3.9 Workmanship. Workmanship shall be first class in every respect. Each holder and guide shall be free of rust, laps, cracks, and other imperfections which may impair its serviceability and durability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling.

4.2.1 *Inspection lot.* All holders manufactured by a single production process and offered for delivery at one time shall be considered a lot for purposes of acceptance inspection.

4.2.2 *Sampling for visual and dimensional inspection.* A random sample of holders shall be selected from each lot in accordance with MIL-STD-105 at inspection level II. The acceptable quality level (AQL) shall be 1.5 percent defective.

4.2.3 *Sampling for acceptance tests.* A random sample of holders shall be selected from each lot in accordance with MIL-STD-105 at inspection level S-1. The AQL shall be 4.0 percent defective.

4.3 Visual and dimensional inspection. Each of the samples selected in accordance with 4.2.2 shall be visually and dimensionally examined to determined compliance with this specification. Any sample containing one or more defects shall be rejected.

4.4 Acceptance tests. Each sample selected in accordance with 4.2.3 shall be tested in accordance with 4.5 to verify compliance with this specification. Any sample which does

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

not meet the requirements for any of these tests shall be rejected.

4.5 Test procedures.

4.5.1 *Performance test.* Each sample shall be tested by driving five drive pins through a standard 2-inch piece of lumber and into a 3/16-inch thick steel plate to the full depth of the shank. The pins shall be three inches long and conform to type I of FF-P-395. The steel plate shall conform to grade A of QQ-S-741, with a Brinell hardness of 126 to 140. The sample shall be rejected if any cracking or distortion of the holder occurs.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102).

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified, (see 6.1).

5.1.1 *Level A.* Component parts of the holder and accessories, subject to corrosion shall be cleaned by process C-1 and coated with type P-9 perservative in accordance with MIL-P-116. Holder and accessories shall then be wrapped with greaseproof barrier-material conforming to MIL-B-121, type I, grade A, class 2, secured with pressure-sensitive tape conforming to PPP-T-60, type III, class 3, and unit packaged in accordance with method 1A-2, or 1A-14 of MIL-P-116, using a fiberboard box conforming to PPP-B-636.

5.1.2 *Level C.* Preservation and packaging which will afford adequate protection against corrosion, deterioration, and damage during shipment from supply source to the first receiving activity for immediate use (vendor to user).

5.2 Packing. Packing shall be level A, B, or C as specified, (see 6.1).

5.2.1 *Level A.* Holders shall be packed in quantities, not to exceed 200 pounds gross weight, in overseas type, snug-fitting nailed wood boxes conforming to PPP-B-621 (class 2), or wood cleated plywood boxes conforming to PPP-B-601. The boxes shall be closed and strapped in conformance with the appendix to the applicable box specification. Shipping containers shall have case liners conforming to MIL-L-10547 and shall be closed and sealed in accordance with the appendix thereto.

5.2.2 *Level B.* Holders shall be packed in domestic-type, snug-fitting, wood-cleated fiberboard, wood-cleated plywood, nailed wood, or wire-bound wood boxes conforming to PPP-B-591, PPP-B-601, PPP-B-585, respectively. Gross weight shall not exceed 200 pounds.

5.2.3 *Level C.* Packing which will afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military activities.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Level of packaging and packing required (see 5.1 and 5.2).
(*c*) Any special marking required (see 5.3).

6.2 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

Rail:

Tools, not otherwise indexed by name.
Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, not otherwise indexed.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

DOD coordination has been waived (No interest)

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.