GGG-T-558/1B
April 9, 1973
SUPERSEDING
Fed. Spec. GGG-T-558/1A
April 10, 1967

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (UNIVERSAL TYPE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558 and covers the detail requirements for universal type tool boxes.

1.2 Classification.

1.2.1 Type and classes. Tool boxes shall be of the following type and classes, as specified (see 6.1):

Type I - Universal.
  Class 1 - With two-compartment cantilever tray.
  Class 2 - With three-compartment tote tray.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

GGG-T-558 - Tool Box, Portable; General Specification for.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.


(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General requirements. The general requirements for type I tool boxes shall be in accordance with GGG-T-558.

3.2 Type I, class 1 with two-compartment cantilever tray. The type I, class 1 tool box shall be similar to figure 1 and shall consist of a body, lid, one cantilever tray, handle, and hardware. The tool box shall be fabricated in sizes 16 or 19, as specified (see figure 1 and 6.1).

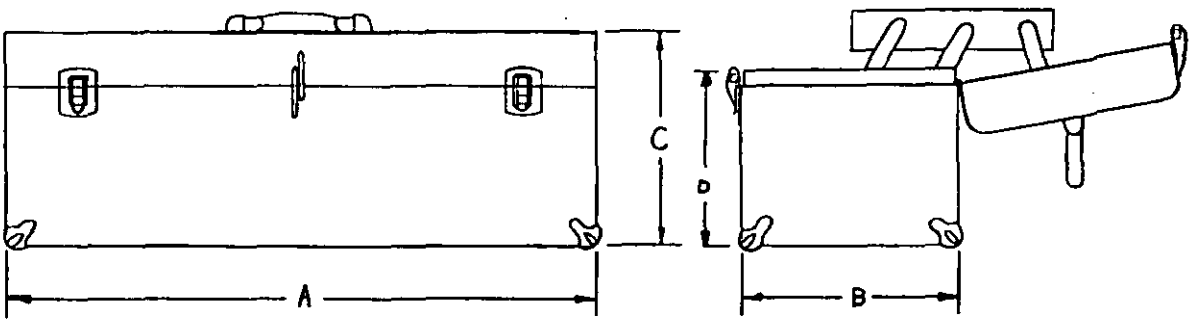

Box size	Dimensions (inches)			
	A	B	C	D
16	16	7	7	6
19	19	7	7	6

FIGURE 1. Type I, class 1, universal, with two-compartment cantilever tray.

3.2.1 Box body and lid. The box body and lid shall be fabricated from not less than 24 gage sheet steel. The outside lower corners of the body shall be reinforced for added strength and protection. The front and ends of the body at the top shall be offset to allow the lid to close flush with the front and ends of the body. The top edge of body at the front, and the front edge of the lid shall be flat folded.

3.2.2 Cantilever tray. The tray shall be fabricated from not less than 26 gage sheet steel. It shall be attached to the box body and lid with steel levers and riveted so that it lifts up and out automatically when the lid is opened. The tray shall rest firmly when so extended. The length and width of the tray shall be not more than 3/4 inch smaller than the inside length and width of the box and not less than 1-3/8 inches deep. When the box is in the closed position, the tray shall be supported by brackets across each inside end of the body or by the edge or ends of the tray formed to hook over the top edge of the box body. The exposed edges, except the dividing partition and ends or edge formed to hook on box body, shall have a 90° flange or be flat folded.


3.2.3 Handle. The handle shall be of a material, size, and shape suitable for lifting and carrying the tool box when loaded as specified for the load test (see 4.1.1). It shall be comfortable to the hand and inert in oil, grease, and other compounds usually used in a garage or machine shop.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

3.2.3.1 Mounting bracket. The handle mounting bracket shall be located and attached to the top center of the tool box. Its design shall permit the handle to swing or be folded down against the box.

3.2.4 Hardware. Hardware for class 1 boxes shall consist of one of the following: (a) One combination drawbolt-hasp and staple attached to the center of the front of the box, or (b) two drawbolts, attached near each end of the front of the box and a hasp and staple or similar hardware shall be attached to the center of the front of the tool box.

3.3 Type I, class 2, with three-compartment tote tray. The type I, class 2 tool box shall be similar to figure 2 and shall consist of a body, lid, one tote tray, handle, and hardware. The tool boxes shall be fabricated in sizes 16, 19, 22, or 24, as specified (see figure 2 and 6.1).

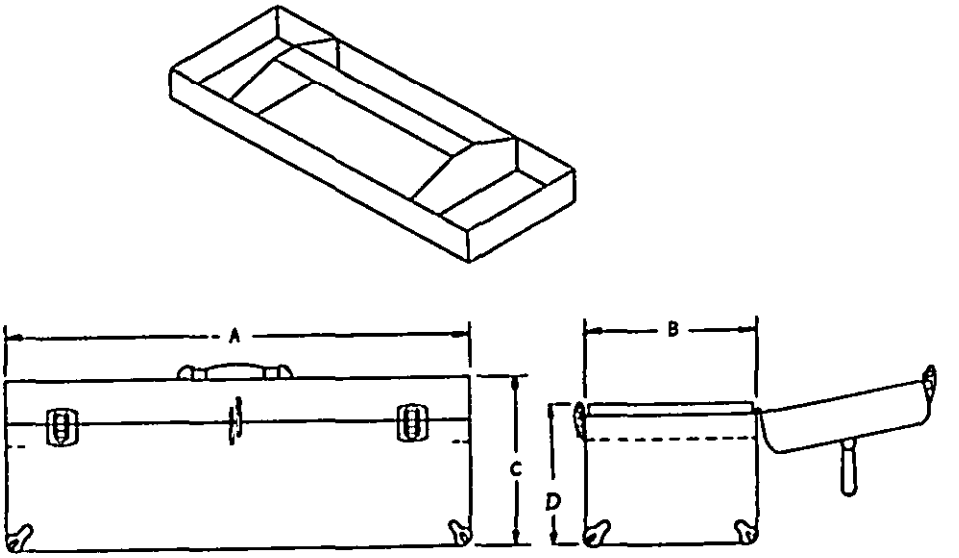

Box size	Box dimensions (inches)			
	A	B	C	D
16	16	7	7	6
19	19	7	7	6
22	22	8-1/2	9-1/2	8
24	24-1/2	8-1/2	9-1/2	8

FIGURE 2. Type I, class 2, universal, with three-compartment tote tray.

3.3.1 Box body and lid. The box body and lid shall be as specified in 3.2.1, except that sizes 16 and 19 shall be fabricated from not less than 24 gage sheet steel and sizes 22 and 24 shall be fabricated from not less than 22 gage sheet steel, and that suitable brackets shall be provided at each inside end of the box body to support the tote tray.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.3.2 Tote tray. The tray shall be fabricated from not less than 24 gage sheet steel. It shall be constructed with a substantial handle and divided into three compartments similar to figure 2. The tray shall suitably fit the box with not more than 3/8 inch clearance between the tray and the box on each side. The exposed edges of the tray, except the partitions, shall be flat folded or have a 90° flange.

3.3.3 Handle. The handle shall be as specified in 3.2.3.

3.3.4 Hardware. Hardware for sizes 16 and 19 boxes shall be as specified in 3.2.4 (a) or (b). Hardware for sizes 22 and 24 shall be as specified in 3.2.4 (b) only.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Quality assurance provisions for type I, classes 1 and 2 shall be in accordance with GGG-T-558 modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with tools, lead shot, or other bulk material as follows: Sizes16 and 19 - 50 pounds; sizes 22 and 24 - 100 pounds.

4.1.2 Drop test. Each sample shall be drop tested when loaded with tools, lead shot, or other bulk material as follows: 5 pounds in the tray and 30 pounds in the bottom.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with GGG-T-558.

6. NOTES

6.1 Ordering data. In addition to the ordering data included in GGG-T-558, purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and class required (see 1.2.1).
(c) Size required (see 3.2 and 3.3).

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - 84

Review Activities:

Army - GL, WC, MD
Navy - SH
Air Force - 84

User Activities:

Army - AT, AV, ME, MI
Navy - MC, YD

Preparing Activity:

GSA-FSS

☆U. S. GOVERNMENT PRINTING OFFICE : 1973 O - 514-179 (512)

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:40Z
Check the source to verify that this is the current version before use.