GGG-T-558/1C
October 19, 1992
SUPERSEDING
GGG-T-558/1B
April 9, 1973

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (UNIVERSAL TYPE)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558/GEN and covers the detail requirements for universal type tool boxes.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Type and classes. Tool boxes shall be of the following type and classes, as specified (see 6.1):

Type I - Universal
Class 1 - With two-compartment cantilever tray
Class 2 - With three-compartment tote tray

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

GGG-T-558/GEN - Tool Box, Portable; General Specification for

Federal Standards:

FED-STD-376 - Preferred Metric Units for General use by the Federal Government

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

3. REQUIREMENTS


3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of tool boxes otherwise conforming to this specification.

Distribution Statement A: Approved for public release; distribution is unlimited. FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.2 General requirements. The general requirements for type I tool boxes shall be in accordance with GGG-T-558/GEN.

3.3 Type I, class 1 with two-compartment cantilever tray. The type I, class 1 tool box shall be similar to figure 1 and shall consist of a body, lid, one cantilever tray, handle, and hardware. The tool box shall be fabricated in sizes 16 or 19, as specified (see figure 1 and 6.1).

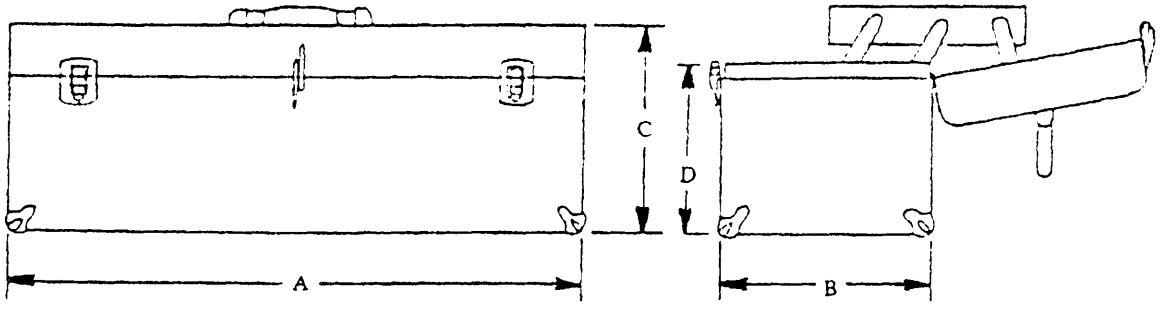

Box size	Dimensions (inches)			
	A	B	C	D
16	16	7	7	6
19	19	7	7	6

Figure 1. Type I, class 1, universal, with two-compartment cantilever tray.

3.3.1 Class 1 box body and lid. The box body and lid shall be fabricated from not less than 22 gage sheet steel. The outside lower corners of the body shall be fitted with "ball corners" as shown in figure 1. The front and ends of the body at the top shall be offset to allow the lid to close flush with the front and ends of the body. The top edge of body at the front and the front edge of the lid shall be flat folded.

3.3.2 Cantilever tray. The tray shall be fabricated from not less than 24 gage sheet steel. It shall be attached to the box body and lid with steel levers and riveted so that it lifts up and out automatically when the lid is opened. The tray shall rest firmly when so extended. The length and width of the tray shall be not more than 3/4 inch smaller than the inside length and width of the box and not less than 1-3/8 inches deep. When the box is in the closed position, the tray shall be supported by brackets across each inside end of the body or by the edge or ends of the tray formed to hook over the top edge of the box body. The exposed edges, except the dividing partition and ends or edge formed to hook on box body, shall have a 90° flange or be flat folded.


3.3.3 Class 1 handle. The handle shall be of a material, size, and shape suitable for lifting and carrying the tool box when loaded as specified for the load test (see 4.1.1). The handle shall be comfortable to the hand and inert in oil, grease, and other compounds usually used in a garage or machine shop.

3.3.3.1 Mounting bracket. The handle mounting bracket shall be located and attached to the top center of the tool box. The bracket design shall permit the handle to swing or be folded down against the box.

3.3.4 Class 1 hardware. Hardware for class 1 boxes shall consist of one of the following: a) one combination drawbolt-hasp and staple attached to the center of the front of the box, or b) two drawbolts, attached near each end of the front of the box and a hasp and staple or similar hardware shall be attached to the center of the front of the tool box.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:40Z
Check the source to verify that this is the current version before use.

3.4 Type 1, class 2, with three-compartment tote tray. The type 1, class 2 tool box shall be similar to figure 2 and shall consist of a body, lid, one tote tray, handle, and hardware. The tool boxes shall be fabricated in sizes 16, 19, 22, or 24, as specified (see figure 2 and 6.1).

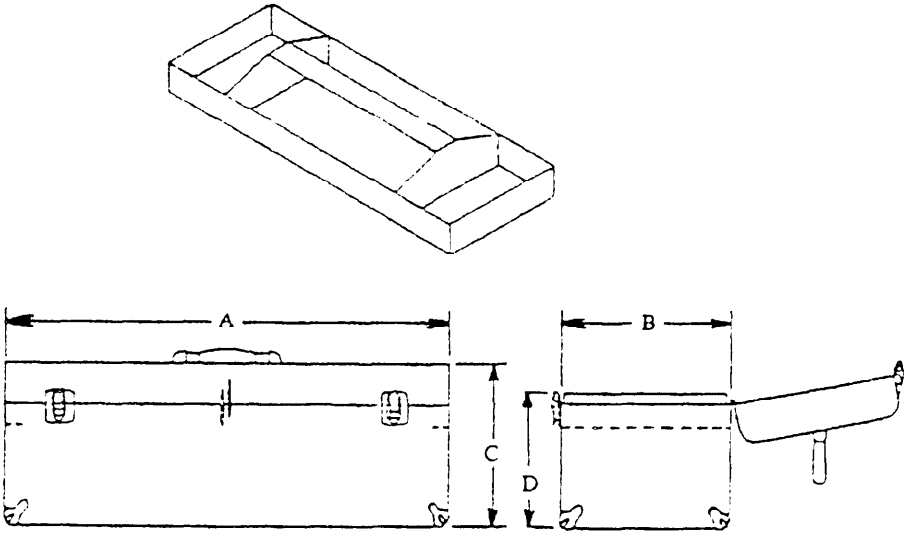

Box size	Box dimensions (inches)			
	A	B	C	D
16	16	7	7	6
19	19	7	7	6
22	22	8-1/2	9-1/2	8
24	24-1/2	8-1/2	9-1/2	8

Figure 2. Type 1, class 2, universal, with three-compartment tote tray.

3.4.1 Class 2 box body and lid. The box body and lid shall be as specified in 3.3.1.

3.4.2 Tote tray. The tote tray shall be fabricated from not less than 24 gage sheet steel and be similar to the illustration in figure 2 except that the handle shall be formed by angling or rounding the underside to increase rigidity of the handle and comfort the hand. The tray shall fit within the box opening with not more than 3/8 inch clearance on any side, and shall be adequately supported to provide storage space below the tray with a depth not less than 75% of the "D" dimension in the table in figure 2. The clearance between the top of the tray and the underside of the lid shall be such that the tray cannot be moved to an extent which would allow the tray to fall below its mounted position into the box cavity.

3.4.3 Class 2 handle. The handle shall be as specified in 3.3.3.

3.4.4 Class 2 hardware. Hardware for sizes 16 and 19 boxes shall be as specified in 3.3.4 a) or b). Hardware for sizes 22 and 24 shall be as specified in 3.3.4 b) only.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

3.5 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Federal Specification are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Quality assurance provisions for type I, classes 1 and 2 shall be in accordance with GGG-T-558/GEN modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with tools, lead shot, or other bulk material as follows: Sizes 16 and 19 - 50 pounds; sizes 22 and 24 - 100 pounds.

4.1.2 Drop test. Each sample shall be drop tested in accordance with GGG-T-558/GEN when loaded with tools, lead shot, or other bulk material as follows: 5 pounds in the tray and 30 pounds in the bottom.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558/GEN.

4.1.4 Weld test. Tool boxes with welded seams shall be tested in accordance with GGG-T-558/GEN.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preparation for delivery shall be in accordance with GGG-T-558/GEN.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type and class required (see 1.2.1).
c. Size required (see 3.3 and 3.4).

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians

Army - GL
Air Force - 99

Review Activity

Army - MD

User Activities

Army - AR, AT, AV, ME
Navy - MC, YD

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.