GGG-T-558/2C
October 19, 1992
SUPERSEDING
GGG-T-558/2B
April 9, 1973

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (GENERAL TYPE)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558/GEN and covers the detail requirements for general type tool boxes.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Type and classes. Tool boxes shall be of the following type and classes, as specified (see 6.1):

Type II - General

Class 1 - With four cantilever trays
Class 2 - Without tote tray
Class 3 - With tote tray

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

GGG-T-558/GEN - Tool Box, Portable; General Specification for

Federal Standards:

FED-STD-376 - Preferred Metric Units for General Use by the Federal Government

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Distribution Statement A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of tool boxes otherwise conforming to this specification.

3.2 General requirements. The general requirements for all tool boxes shall be in accordance with GGG-T-558/GEN.

3.3 Type II, class 1, with four cantilever trays. Type II, class 1 tool boxes shall be similar to figures 1, 2, or 3, and shall consist of a body, lid, four cantilever trays, handle, and hardware. The tool boxes shall be fabricated in sizes 1, 2, or 3, as specified on figure 2 (see 6.1).


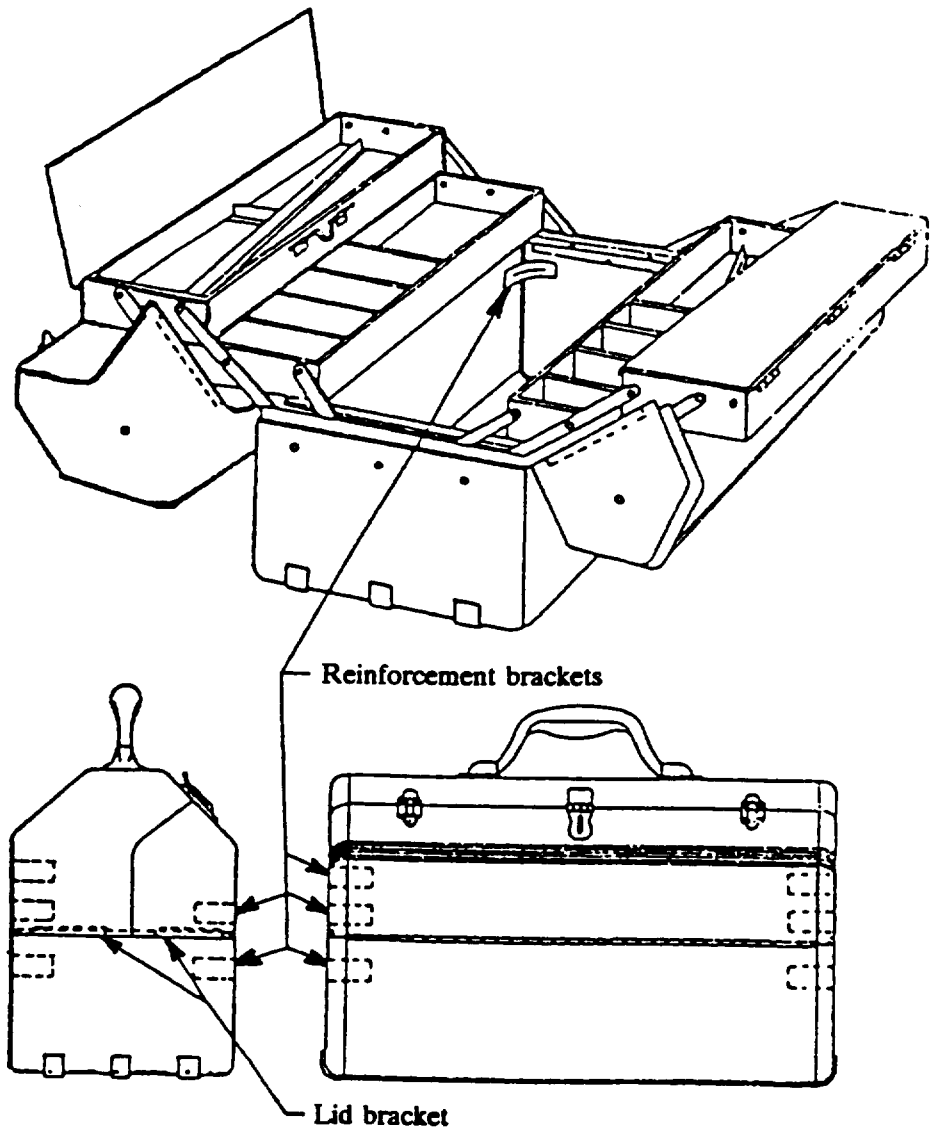


Figure 1. Type II, class 1, general box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

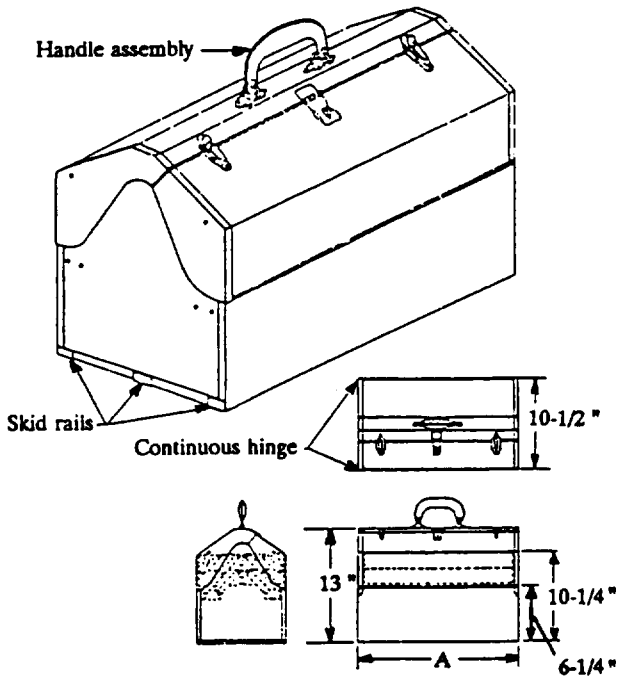

Box size	A (inches)
1	16
2	18
3	22

Figure 2. Type II, class 1, general box assembly and dimensions.


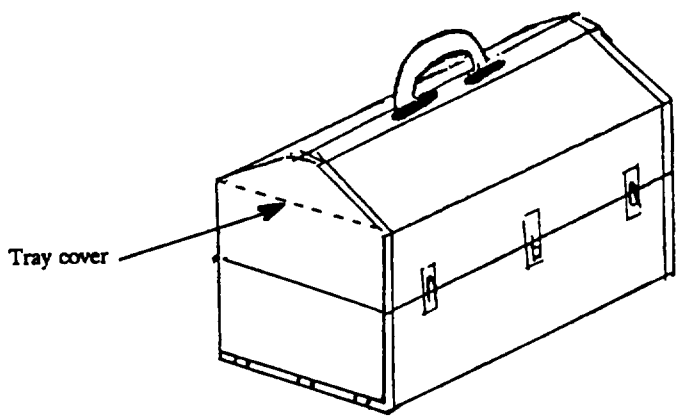


Figure 3. Type II, class 1, general box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.3.1 Class 1 box body and lid. The box body and lid shall be fabricated from not less than 22 gage sheet steel. The bottom of the box shall be reinforced with three strips of steel to be used as skid rails. These strips shall be not less than 3/4 inch wide, not less than 20 gage thick, and shall be welded to the outside and extend the length of the box and not less than 1/4 inch up each end. The box body and lid shall have either rounded corners as shown in figure 1 or square corners as shown in figure 2. Each round corner shall be reinforced as shown in figure 1 with brackets 3/4 inch wide, formed at a 90° angle with a suitable radius at the bend. No brackets are required for square-corner construction. The ends of the box body shall either be the same height as the hinge as shown in figures 1 and 3, or extended above the hinge as shown in figure 2. When the ends are the same height as the hinge, each end of two piece lids shall have a lid bracket welded to it or formed as an integral part of the lid in such a manner that when the lid is closed, the bracket will hook over the end of the box body. When the ends are extended above the hinge, each end shall be reinforced by an inner wall covering the complete end from the hinges to the top. The end pieces shall be formed and fitted together so that each end will be approximately 1/4 inch thick. The inner portion of the ends shall have an impression or panel (design optional) formed for strengthening purposes as shown in figure 4. The inner portion of the ends shall also have a 1 inch by 1/8 inch steel strip of 16 gage steel-formed strip extending vertically the full height of the ends at the center between the inner and outer walls and shall be welded to both.

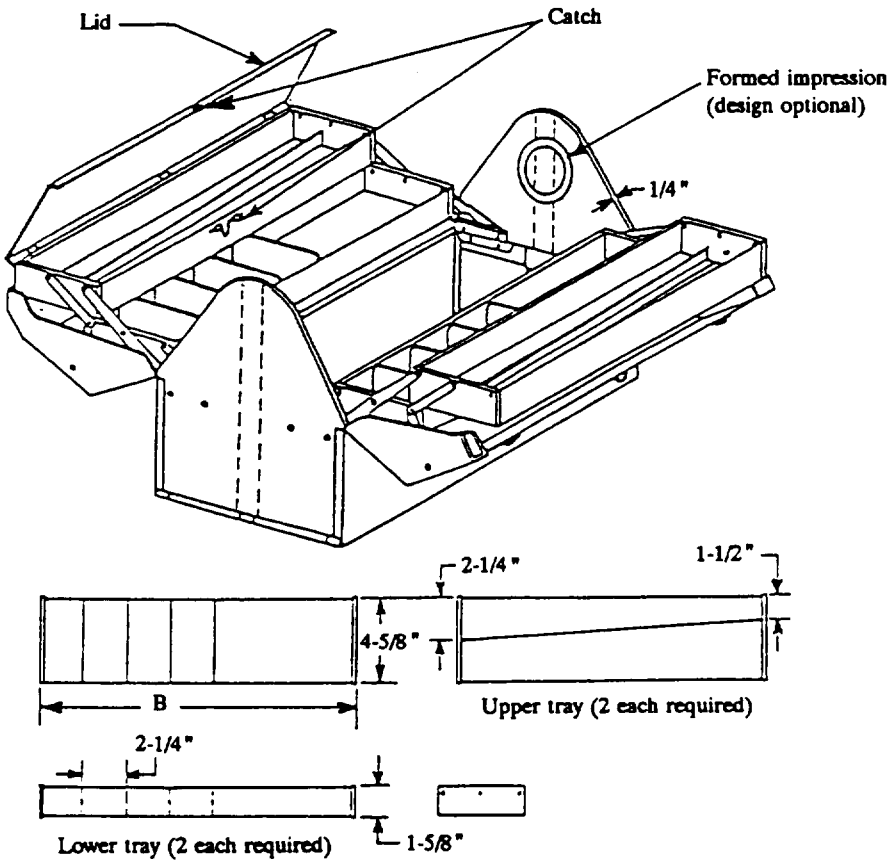

Tray dimensions	
Box size	B (inches)
1	14-1/2
2	16-1/2
3	20-1/2

Figure 4. Type II, class 1, general box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.3.2 Cantilever trays. The tray bodies shall be fabricated from not less than 24 gage sheet steel. The upper tray lid(s) and the dividing partitions shall be fabricated from not less than 20 gage sheet steel. The trays shall be attached to the box so that the trays lift up and out automatically when the box is opened. The dimensions between the bottom of the lower trays and the bottom of the box, when the box is closed, shall be 6-1/4 inches minimum. The dimension between the two lower trays, when the box is open, shall be 7-1/4 inches minimum. The two upper trays shall be equipped with a lid which is hinged on the long side to open from the center of the box outward, or with a lid that is integral with the box lid and positioned so that it forms a cover for the upper trays. The upper trays shall be divided into two compartments as shown in figure 4. The lower trays shall be divided into five compartments as shown in figure 4. Suitable brackets shall be provided at each end of the box to support the trays when the box is in the closed position. The exposed edges, except the dividing partitions, and front edge of the tray lids shall have a 90° flange or be flat folded.


3.3.3 Class 1 handle. The handle shall be of a material, size, and shape suitable for lifting and carrying the tool box when loaded as specified for the load test (see 4.1.1). It shall be comfortable to the hand and inert in oil, grease, and other compounds usually used in a garage or machine shop.

3.3.3.1 Mounting bracket. The handle mounting bracket shall be located and attached to the top center of the tool box. Bracket design shall permit the handle to swing or be folded down against the box.

3.3.4 Hardware. The hardware shall consist of a hasp and staple or drawbolt with padlock eye attached to the center of the lids, and one drawbolt or catch attached to each side of the lids located as illustrated in figure 2.

3.4 Type II, class 2, without tote tray. Type II, class 2 tool box shall be the same as type II, class 3, (see 3.5 and figure 5) except it shall not have a tote tray. At the option of the manufacturer, it may not have tray support brackets.

3.5 Type II, class 3, with tote tray. Type II, class 3 tool box shall be similar to figure 5 and shall consist of a body, two lids, one tote tray, and handle. The tool box shall be fabricated in the size specified (see 6.1 and figure 5).

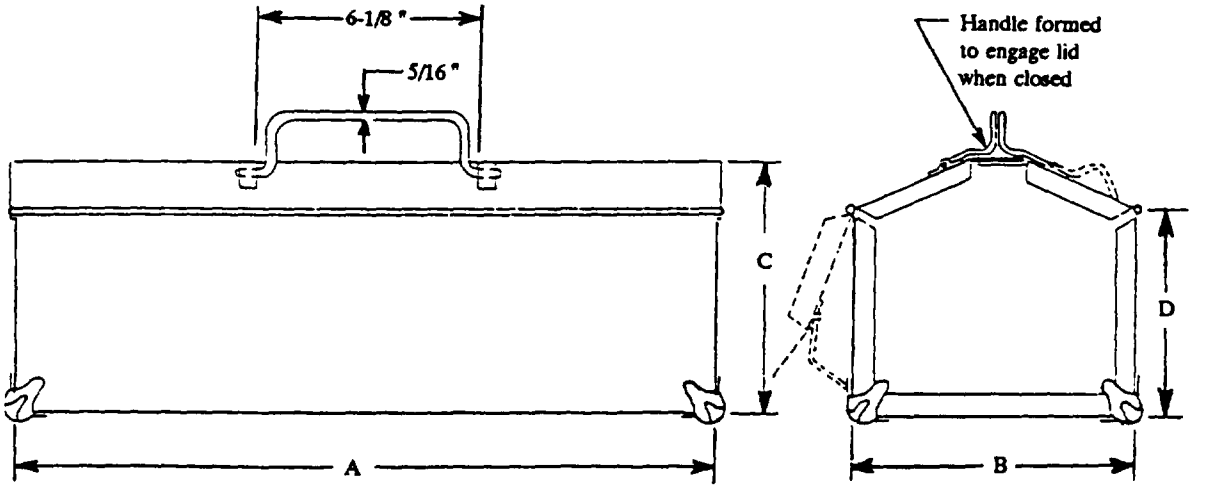


Box size	Dimensions (inches)			
	A	B	C	D
21A	21	8-1/2	7-3/8	5-5/8
21B	21	9-1/2	9-13/16	8-1/32

Figure 5. Type II, classes 2 and 3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the currentversion before use.

3.5.1 Class 3 box body and lids. The box body, except the ends, and the lids of size 21A boxes shall be fabricated from not less than 22 gage sheet steel. The lids of size 21B boxes shall be of not less than 20 gage sheet steel. Ends shall be fabricated from not less than 20 gage sheet steel for size 21A boxes and 16 gage steel for size 21B boxes. The lids shall overlap in the center. The outside lower corners of the body shall be reinforced for added strength and protection. The ends of the lids shall have a 90° flange formed to fit over the ends of the box when closed. Suitable brackets shall be provided at each inside end of the box body to support the tote tray.

3.5.2 Tote tray. The tote tray shall be fabricated from not less than 22 gage sheet steel. The tote tray shall be divided into three compartments, have a substantial and comfortable handle, and generally conform to the shape and dimensions shown in figure 6. The tray shall fit the box with not more than 3/8 inch clearance between the tray and box. The exposed edges, except the partitions and ends, shall be folded.

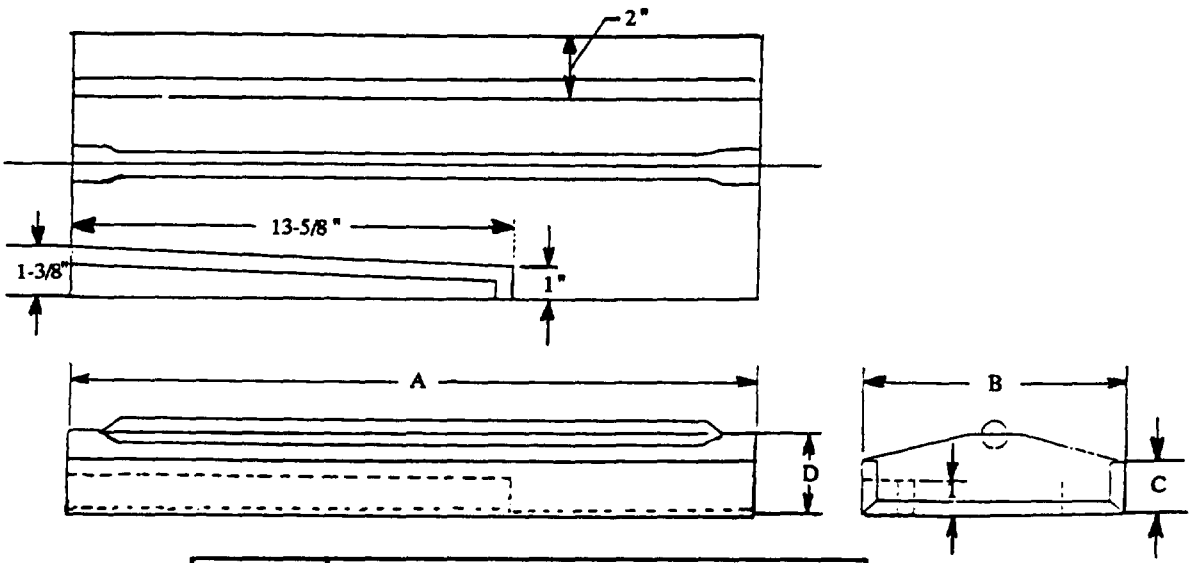

Box size	Dimension (inches)			
	A	B	C	D
21A	20-11/16	8-1/8	1-3/4	2-5/8
21B	20-11/16	9-1/8	1-3/4	2-3/4

Figure 6. Tray for type II, class 3.

3.5.3 Class 3 handles. The handles shall be constructed in accordance with the dimensions and configuration shown on figure 5. It shall be formed so that the heel will engage the lid when in the closed position. Both handles shall be free to fold down against the lids and shall be so assembled as to prevent removal from the box (without damage to the box or handles), when padlocked together.

3.6 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Federal Specification are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Quality assurance provisions shall be in accordance with GGG-T-558/GEN, modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with 100 pounds of tools, lead shot, or other bulk material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4.1.2 Drop test. Each sample shall be drop tested in accordance with GGG-T-558/GEN when loaded with tools, lead shot, or other bulk material as follows: 5 pounds in each tray and 30 pounds in the bottom.

4.1.3 Cantilever tray test. Each sample shall have the trays filled with wrench sockets or similar items and turned on its side and upside down to determine the suitability of the lid(s) to retain the sockets in the trays. The box shall be rejected if the lid(s) fails to retain the sockets in the trays.

4.1.4 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558/GEN.

4.1.5 Tray test. The tray of each type II, class 3 sample tool box shall be loaded with 40 pounds of material and lifted 10 times. The box shall be rejected if the tray shows any distortion which would affect the serviceability of the tray.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with GGG-T-558/GEN.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type and class required (see 1.2.1).
c. Size required (see 3.3 and 3.5).

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians

Army - GL
Air Force - 99

Review Activity

Army - MD

User Activities

Army - AR, AT, AV
Navy - MC, YD

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.