GGG-T-558/3B
April 9, 1973
SUPERSEDING
Fed. Spec. GGG-T-558/3A
September 28, 1966

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (SHIPFITTER'S TYPE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558 and covers the detail requirements for type III, class 2 narrow tray, shipfitter's tool box.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

GGG-T-558 - Tool Box, Portable; General Specification For.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.


(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

3. REQUIREMENTS

3.1 General requirements. The general requirements for all tool boxes shall be in accordance with GGG-T-558.

3.2 Design and construction. The tool box shall be similar to figure 1 and shall consist of a body, lid, narrow tray, handle, and hardware. The box shall be fabricated in one size as specified on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

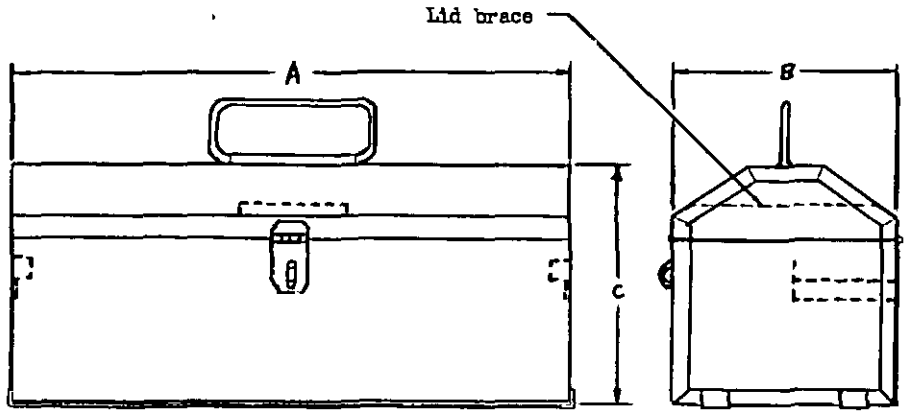

Dimensions (inches)		
A	B	C
18-1/2	7-1/2	8

FIGURE 1. Type III, class 2, shipfitter's.

3.2.1 Box body and lid. The box body and lid shall be fabricated from not less than 22 gage sheet steel. The front and ends of the box body at the top shall be offset to allow the lid to close flush with the front and ends of the body. The bottom of the box shall be reinforced with two strips of steel to be used as skid rails. These strips shall be not less than 7/8 inch wide, not less than 14 gage thick, and shall be welded to the outside and extend the length of the box and not less than 3/8 inch up each end. The lid shall be braced with a steel brace welded inside the lid as shown on figure 1 for strength and rigidity. A handle reinforcement plate shall be properly placed on the inside of the lid for strength and support of the handle. Suitable brackets, fabricated from 16 gage sheet steel, shall be provided at each inside end of the body to support the tray. The brackets shall be positioned so that the top of the tray extends above the box body approximately 3/8 inch. One end of each bracket shall be bent upward to hold the tray in place against the back of the box body. The top edge of the body at the front end, and the front edge of the lid shall be flat folded.

3.2.2 Narrow tray. The tray shall be fabricated from not less than 22 gage sheet steel. It shall have a lift at each end for handling purposes. The tray shall suitably fit the box with not more than 3/8 inch clearance between the tray and the box, at each end. The tray shall be 3-1/16 inches wide and 2 inches deep.

3.2.3 Handle. A suitable chest-type handle shall be attached to the top center of the tool box as illustrated on figure 1.

3.2.4 Hardware. Hardware for type III, class 2 boxes shall consist of a hasp and staple or similar hardware designed for the use of a padlock attached to the center of the box as illustrated on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Quality assurance provisions shall be in accordance with GGG-T-558 modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with 100 pounds of tools, lead shot, or other bulk material.

4.1.2 Drop test. Each sample shall be drop tested when loaded with tools, lead shot, or other bulk material as follows: 5 pounds in tray and 30 pounds in bottom.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with GGG-T-558.

6. NOTES

6.1 Ordering data. In addition to the ordering data included in GGG-T-558, purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and class required.

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - 84

Review Activities:

Army - GL, WC, MD
Navy - SH
Air Force - 84

User Activities:

Army - AT, AV, ME, MI
Navy - MC, YD

Preparing Activity:

GSA-FSS

U. S. GOVERNMENT PRINTING OFFICE : 1973 O - 514-179 (514)

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.