GGG-T-558/4B
April 9, 1973
SUPERSEDING
Fed. Spec. GGG-T-558/4A
April 10, 1967

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (CARPENTER'S TYPE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558 and covers the detail requirements for carpenter's type tool boxes.

1.2 Classification.

1.2.1 Types. Tool boxes shall be of the following types, as specified (see 6.1):

Type IV - Box type.

Type V - Chest type.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

GGG-T-558 - Tool Box, Portable; General Specification For.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)


FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General requirements. The general requirements for all tool boxes shall be in accordance with GGG-T-558.

3.2 Type IV, box type. Type IV tool boxes shall be similar to figure 1 and shall consist of a body, lid, saw block, level brackets, handles, and hardware. The tool boxes shall be fabricated in one size as specified on figure 1.

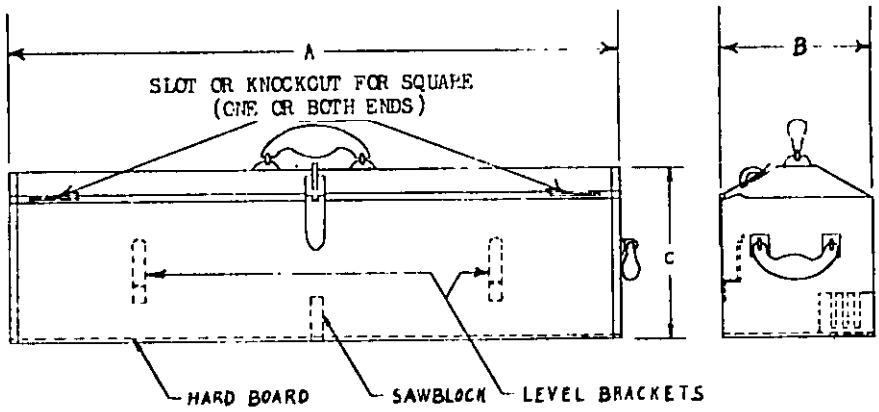

Dimensions (inches)		
A	B	C
32-3/8	8-3/8	9-1/2

FIGURE 1. Type IV, carpenter's, box type.

3.2.1 Box body and lid. The box body and lid, except the lid ends, shall be fabricated from not less than 24 gage sheet steel. The ends shall be not less than 22 gage sheet steel. The bottom of the box body, on the inside, shall be covered with hardboard to protect the cutting edge of saws and other cutting tools. One or two slots (or knockouts) shall be provided at the top of the body to accommodate a carpenter's square. With the exception of the lid ends, all exposed edges shall be flat folded or have a 90° flange.

3.2.2 Saw block. A plywood saw block of adequate size to accommodate three standard carpenter's saws shall be securely attached to the rear wall of the box as shown on figure 1.


3.2.3 Level brackets. Two level brackets, fabricated from not less than 16 gage steel and of adequate size to accommodate a standard (approximately 1 by 2-1/2 by 28 inches) level, shall be welded to the inside front wall of the box as shown on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.2.4 Handles. The handles shall be of a material, size, and shape suitable for lifting and carrying the tool box when loaded as specified for the load test (see 4.1.1). One handle shall be attached to the top center of the box and one handle on the end of the box as shown on figure 1. The handles shall be attached with suitable mounting brackets so that they may either swing or fold down against the box.

3.2.5 Hardware. Hardware shall consist of a hasp and staple attached to the center of the front of the tool box as shown on figure 1.

3.3 Type V, chest type. Type V tool box shall be similar to figure 2 and shall consist of a body, lid, two drawers, level brackets, saw block, hardware, and handle. The tool boxes shall be fabricated from steel or wood and in one size as specified on figure 2.

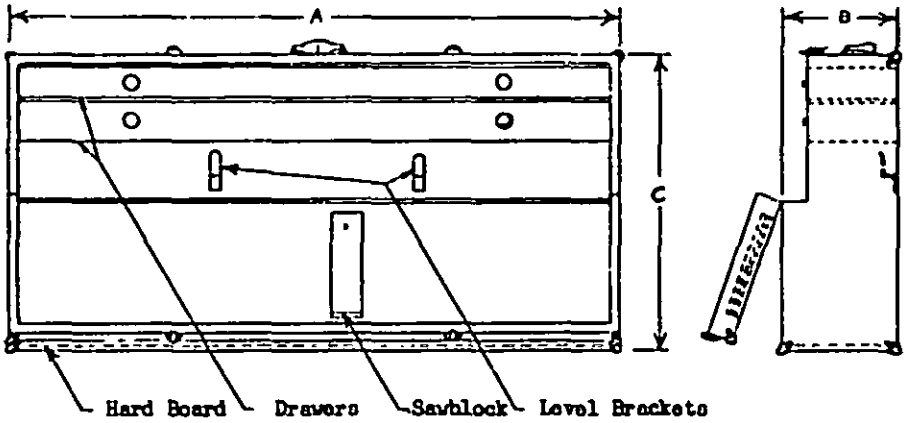

Dimensions (inches)		
A	B	C
32	7	16

FIGURE 2. Type V, carpenter's, chest type.

3.3.1 Box body and lid (steel construction). For steel construction, the box body and lid shall be fabricated from not less than 22 gage sheet steel. The inside bottom of the body shall be covered with hardboard, securely attached, to protect the cutting edge of saws and other cutting tools. With the exception of the edges of lid ends adjacent to the hinge, all exposed edges shall be flat folded or have a 90° flange. Each outside corner of the box shall be reinforced for added strength and protection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.3.1.1 Box body and lid (wood, construction). For wood construction, the body and lid shall be fabricated from 3/8 inch plywood covered with sheet steel which is not less than 0.009 inch thick. The lid shall be hinged to the body with two butt type hinges riveted in place. Each outside corner shall be reinforced for added strength and protection.

3.3.2 Saw block. A plywood saw block, of adequate size to accommodate two standard carpenter's saws, shall be attached by bolts, screws, or rivets to the inside of the lid.

3.3.3 Level brackets. Two level brackets, fabricated from not less than 16 gage steel and of adequate size to accommodate a standard (approximately 1 by 2-1/2 by 28 inches) level, shall be attached by bolts, screws, rivets, or welded to the inside back of the box.

3.3.4 Handle. The box shall have one handle of the type specified in 3.2.4 attached to the top center.

3.3.5 Hardware. Hardware shall consist of one drawbolt near each end of the box and one integral lock, hasp and staple, or other similar hardware to accommodate a padlock near the center to hold and lock the box in the closed position. The type of integral lock shall be in accordance with the manufacturer's standard practice.

3.3.6 Drawers, guides, and supports (steel construction). The drawers and drawer guides shall be fabricated from not less than 24 gage sheet steel. Drawer supports shall be fabricated from not less than 18 gage sheet steel. The drawers shall be not less than 29-1/2 inches long, 4 inches front to back, and 1-1/2 inches high. One drawer shall be lined on the inside bottom with felt which shall be free from starch or sizing and shall be secured in place with water- and oil-resistant adhesive. Each drawer shall be provided with suitable drawer pulls. The drawers shall be located as shown on figure 2.

3.3.6.1 Drawers and supports (wood construction). The drawers shall be fabricated from 3/8 inch plywood on the sides and 1/4 inch plywood on the bottom. Drawer supports shall be fabricated from not less than 18 gage steel and securely fastened to the box body. The drawers shall be not less than 31 inches long, 3-1/2 inches front to back, and 1-1/2 inches high. Drawer pulls and location shall be as specified in 3.3.6.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Sampling, inspection, and test procedures shall be in accordance with GGG-T-558 modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with 100 pounds of tools, lead shot, or other bulk material.

4.1.2 Drop test. Each sample to be drop tested shall be loaded with tools, lead shot, or other bulk material as follows: Type IV - 30 pounds in the bottom; type V - 2 pounds in each drawer and 40 pounds in the bottom.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with GGG-T-558.

6. NOTES

6.1 Ordering data. In addition to the ordering data included in GGG-T-558, purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2.1).

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - 84

Review Activities:

Army - GL, WC, MD
Navy - SH
Air Force - 84

User Activities:

Army - AT, AV, ME, MI
Navy - MC, YD

Preparing Activity:

GSA-FSS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.