FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (CARPENTER'S TYPE)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558/GEN and covers the detail requirements for carpenter's type tool boxes.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification

1.2.1 Types. Tool boxes shall be of the following types, as specified (see 6.1):

Type IV - Box type

Type V - Chest type

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications

GGG-T-558/GEN - Tool Box, Portable: General Specification for

Federal Standards:

FED-STD-376 - Preferred Metric Units for General Use by the Federal Government

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)


3. REQUIREMENTS

3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of tool boxes otherwise conforming to this specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.2 General requirements. The general requirements for all tool boxes shall be in accordance with GGG-T-555/GEN.

3.3 Type IV, box type. Type IV tool boxes shall be similar to figure 1 and shall consist of a body, lid, saw block, level brackets, handles, and hardware. The tool boxes shall be fabricated in one size as specified on figure 1.

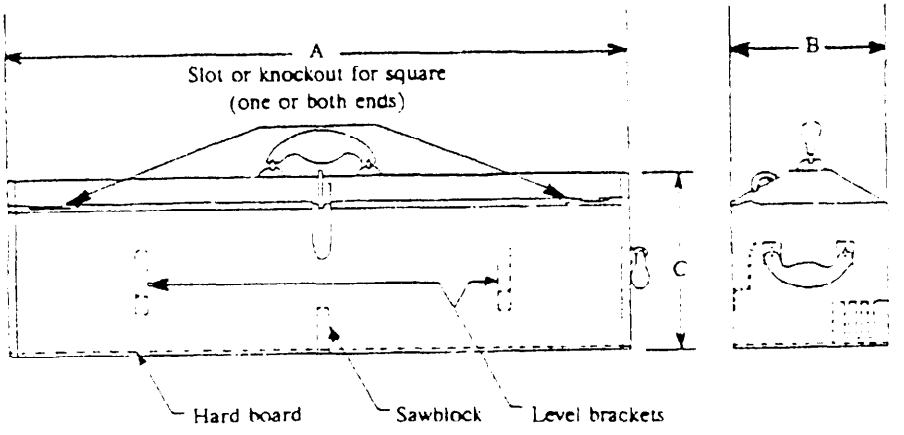

Dimensions (inches)		
A	B	C
32-3/8	8-3/8	9-1/2

Figure 1. Type IV, carpenter's, box type

3.3.1 Type IV box body and lid. The box body and lid shall be fabricated from not less than 22 gage sheet steel. The bottom of the box body, on the inside, shall be covered with hardboard to protect the cutting edge of saws and other cutting tools. One or two slots (or knockouts) shall be provided at the top of the body to accommodate a carpenter's square. With the exception of the lid ends, all exposed edges shall be flat folded or have a 90° flange.

3.3.2 Type IV saw block. A plywood saw block of adequate size to accommodate three standard carpenter's saws shall be securely attached to the rear wall of the box as shown on figure 1.


3.3.3 Type IV level brackets. Two level brackets, fabricated from not less than 16 gage steel and of adequate size to accommodate a standard (approximately 1 inch by 2-1/2 inches, by 28 inches) level, shall be welded to the inside front wall of the box as shown on figure 1.

3.3.4 Type IV handles. The handles shall be of a material, size, and shape suitable for lifting and carrying the tool box when loaded as specified for the load test (see 4.1.1). One handle shall be attached to the top center of the box and one handle on the end of the box as shown on figure 1. The handles shall be attached with suitable mounting brackets so that they may either swing or fold down against the box.

3.3.5 Type IV hardware. Hardware shall consist of a hasp and staple attached to the center of the front of the tool box as shown on figure 1.

3.4 Type V, chest type. Type V tool box shall be similar to figure 2 and shall consist of a body, lid, two drawers, level brackets, saw block, hardware, and handle. The tool boxes shall be fabricated from steel or wood in one size, as specified on figure 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

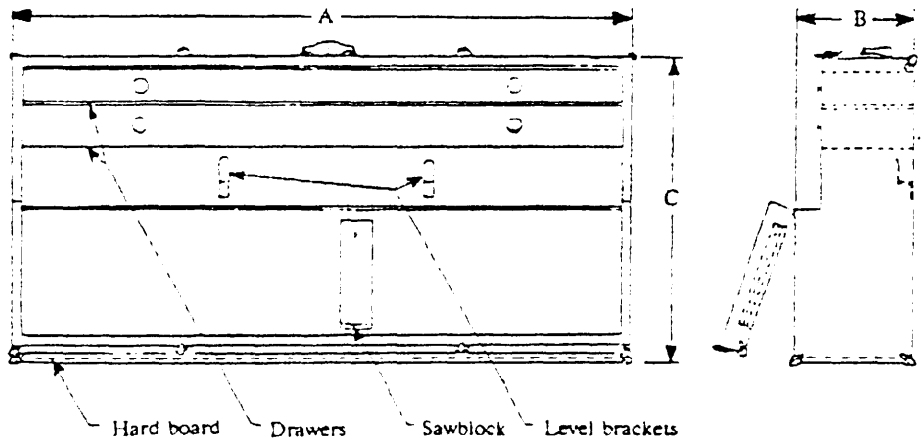

Dimensions (inches)		
A	B	C
32	7	16

Figure 2. Type V, carpenter's, chest type.

3.4.1 Type V box body and lid.

3.4.1.1 Steel construction. For steel construction, the box body and lid shall be fabricated from not less than 22 gage sheet steel. The inside bottom of the body shall be covered with hardboard, securely attached, to protect the cutting edge of saws and other cutting tools. With the exception of the edges of lid ends adjacent to the hinge, all exposed edges shall be flat folded or have a 90° flange. Each outside corner of the box shall be reinforced for added strength and protection.

3.4.1.2 Wood construction. For wood construction, the body and lid shall be fabricated from 3/8 inch plywood covered with sheet steel which is not less than 0.009 inch thick. The lid shall be hinged to the body with two butt type hinges riveted in place. Each outside corner shall be reinforced for added strength and protection.

3.4.2 Type V saw block. A plywood saw block, of adequate size to accommodate two standard carpenter's saws, shall be attached by bolts, screws, or rivets to the inside of the lid.

3.4.3 Type V level brackets. Two level brackets, fabricated from not less than 16 gage steel and of adequate size to accommodate a standard (approximately 1 inch by 2-1/2 inches by 28 inches) level, shall be attached by bolts, screws, rivets, or welded to the inside back of the box.

3.4.4 Type V handle. The box shall have one handle of the type specified in 3.3.4 attached to the top center.

3.4.5 Type V hardware. Hardware shall consist of one drawbolt near each end of the box and one integral lock, hasp and staple, or other similar hardware, to accommodate a padlock, near the center to hold and lock the box in the closed position. The type of integral lock shall be in accordance with the manufacturer's standard practice.

3.4.6 Drawers, guides, and supports (steel construction). The drawers and drawer guides shall be fabricated from not less than 24 gage sheet steel. Drawer support shall be fabricated from not less than 18 gage sheet steel. The drawers shall be not less than 29-1/2 inches long, 4 inches front to back, and 1-1/2 inches high. One drawer shall be lined on the inside bottom with felt which shall be free from starch or sizing and shall be secured in place with water- and oil-resistant adhesive. Each drawer shall be provided with suitable drawer pulls. The drawers shall be located as shown on figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.4.6.1 Drawers and supports (wood construction). The drawers shall be fabricated from 3/8 inch plywood on the sides and 1/4 inch plywood on the bottom. Drawer supports shall be fabricated from not less than 18 gage steel and securely fastened to the box body. The drawers shall be not less than 31 inches long, 3-1/2 inches front to back, and 1-1/2 inches high. Drawer pulls and location shall be as specified in 3.4.6.

3.5 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Federal Specification are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Sampling, inspection, and test procedures shall be in accordance with GGG-T-558/GEN, modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with 100 pounds of tools, lead shot, or other bulk material.

4.1.2 Drop test. Each sample shall be drop tested in accordance with GGG-T-558/GEN when loaded with tools, lead shot, or other bulk material as follows: Type IV - 30 pounds in the bottom; type V - 2 pounds in each drawer and 40 pounds in the bottom.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558/GEN.

4.1.4 Weld test. Tool boxes with welded seams shall be tested in accordance with GGG-T-558/GEN.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with GGG-T-558/GEN.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type required (see 1.2.1).

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians

Army - GL
Air Force - 99

Review Activity

Army - MD

User Activity

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.