GGG-T-558/5A
April 9, 1973
SUPERSEDING
Fed. Spec. GGG-T-558/5
September 28, 1966

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (MECHANIC'S CHEST TYPE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558 and covers the detail requirements for mechanic's chest type tool boxes.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Type. Tool boxes shall be type VI, mechanic's chest type.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

GGG-T-558 - Tool Box, Portable; General Specification For.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General requirements. The general requirements for this tool box shall be in accordance with GGG-T-558.

3.2 Design. The tool box shall be of the chest design, which consists of a container with six drawers, top cover with front panel attached, till-in-top compartment, tote tray, suitable handles, and an integral lock. The shape, drawers, and compartment arrangement shall be similar to figure 1.

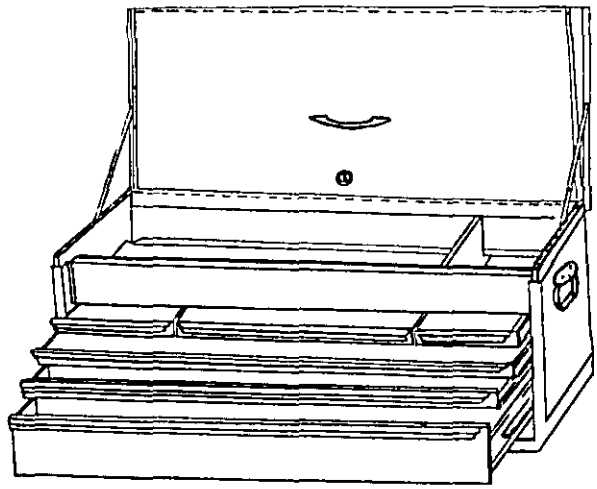


FIGURE 1. Type VI, mechanic's chest type.

3.2.1 Overall dimensions. The overall dimensions, excluding projections of the box, shall be 26 inches long, 13 inches front to back, and 15 inches high. The tolerance for each of these dimensions shall be ±1 inch.

3.2.2 Container. The container shall be fabricated from not less than 20 gage sheet steel except that when 18 gage steel is used for each end and 20 gage steel is used for the bottom; not less than 22 gage steel shall be used for the back of the container. The thickness of the steel used to reinforce the container may be less than 20 gage.

3.2.3 Top cover and front panel. The top cover and front panel shall be fabricated from not less than 20 gage sheet steel except that when the top is of one piece, deep drawn, seamless construction, not less than 22 gage steel shall be used for the top cover and front panel. The thickness of the steel used to reinforce the top cover and front panel may be less than 20 gage. The front panel and top cover shall be joined by a continuous hinge, and the top cover and container shall be joined by a continuous hinge so that, when the tool box is open, the front panel folds back over the till-in-top as illustrated in figure 1. The hinges shall be formed as an integral part of the container, top cover, and front panel, or shall be either spot welded, seam welded, or riveted to the container, cover, and panel. The front panel, when in a closed position, shall cover and hold the drawers closed and be provided with an integral lock. The corners of the top cover shall be either square or rounded. The top cover shall open a minimum of 90° and shall open and close freely. The top cover shall be so designed that it will stand upright by itself when the cover is fully open. The ends of the front panel and top cover shall be flat folded or of double thickness, or have a 90° flange.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.2.4 Drawers. The drawers shall be fabricated from not less than 22 gage sheet steel. The top front edge of each drawer shall be formed by one of the following methods: flat folded, double hemmed, inward to form a 90° flange, or open folded outward to form a drawer pull. All other edges may or may not be flat folded at the option of the contractor. The drawers shall slide easily on compound slides that will hold the drawer in a horizontal position when fully extended. Provisions shall be made to prevent accidental removal of drawers, but shall permit intentional removal when desired. Each drawer shall be provided with suitable drawer pulls or handles for opening and closing. The minimum inside dimensions of the three top drawers shall be 4-1/4 inches long, 10-1/4 inches front to back, and 1 inch deep. The minimum inside dimensions of the two center full width drawers shall be 22-1/4 inches long, 10-1/4 inches front to back, and 1 inch deep. The minimum inside dimensions of the bottom full width drawer shall be 22-1/4 inches long, 10-1/4 inches front to back, and 2-3/4 inches deep.

3.2.5 Till-in-top compartment. The till-in-top compartment shall be partitioned into a minimum of 3 sections, one of which shall be suitable for holding the tote tray. The partitions shall be fabricated from sheet steel which is not less than 24 gage and welded in place. The till-in-top compartment shall be not less than 2-1/4 inches deep. The exposed edges at the ends and front of the compartment shall be flat folded.

3.2.6 Handles. A conveniently located metal handle shall be provided on the front panel for opening and closing the tool box. A chest type metal handle shall be provided at each end of the tool box. The end handles shall be bolted, riveted, or welded to the tool box and shall swing out and stop at approximately 90° when in a carrying position and swing down against the box when not in use.

3.2.7 Tote tray. The tote tray shall be fabricated from not less than 22 gage sheet steel. It shall be constructed with a steel partition welded in place, extending the entire inside length of the tray, forming a compartment 1 inch wide at one end, and 1-3/4 inches wide at the opposite end for holding wrench sockets. The tolerance for each of these dimensions shall be ±1/4 inch. It shall have a substantial handle across the top. The tray shall be designed to fit the till-in-top compartment and be not less than 18-1/2 inches long, 7-1/2 inches wide, and 1-1/2 inches high on the side edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Quality assurance provisions shall be in accordance with GGG-T-558 modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with 250 pounds of tools, lead shot, or other bulk material distributed between the till-in-top compartment and drawers, with at least 100 pounds distributed proportionally among the drawers.

4.1.2 Drop test. Not required.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558.

4.1.4 Top cover and front panel test. The top cover and front panel shall be opened and closed to assure compliance with 3.2.3.

4.1.5 Key and lock test. The box shall be locked and unlocked 3 times with each key to assure efficient operation of the keys and lock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4.1.6 Drawer test. The drawers of each sample box shall be loaded with tools or other bulk material (5 pounds in the 4-1/4 inch long drawers and 10 pounds in all others) and opened and closed 5 times to assure compliance with 3.2.4.

4.1.7 Tray test. The tray of each sample tool box shall be loaded with 40 pounds of material and lifted 10 times. The box shall be rejected if the tray shows any distortion which would affect the serviceability of the tray.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with GGG-T-558.

6. NOTES

6.1 Intended use. The tool boxes (chests) as furnished under this specification are for the storage of mechanic's hand tools and the like. They are not the type usually carried by the mechanic from job to job but are a type placed on a bench or stand for tool storage.

6.2 Ordering data. In addition to ordering data included in GGG-T-558, purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2.1).

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - 84

Review Activities:

Army - GL, WC, MD
Navy - SH
Air Force - 84

User Activities:

Army - AT, AV, ME, MI
Navy - MC, YD

Preparing Activity:

GSA-FSS

U. S. GOVERNMENT PRINTING OFFICE : 1973 O - 514-179 (516)

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.