GGG-T-558/5B
October 19, 1992
SUPERSEDING
GGG-T-558/5A
April 9, 1973

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (MECHANIC'S CHEST TYPE)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558/GEN and covers the detail requirements for type VI mechanic's chest type tool boxes.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

GGG-T-558/GEN - Tool Box, Portable; General Specification for

Federal Standards:

FED-STD-376 - Preferred Metric Units for General Use by the Federal Government

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

3. REQUIREMENTS

3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of tool boxes otherwise conforming to this specification.

3.2 General requirements. The general requirements for this tool box shall be in accordance with GGG-T-558/GEN.

3.3 Design. The tool box shall be of the chest design, which consists of a container with six drawers, top cover with front panel attached, till-in-top compartment, tote tray, suitable handles, and an integral lock. The shape, drawers, and compartment arrangement shall be similar to figure 1.

Distribution Statement A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

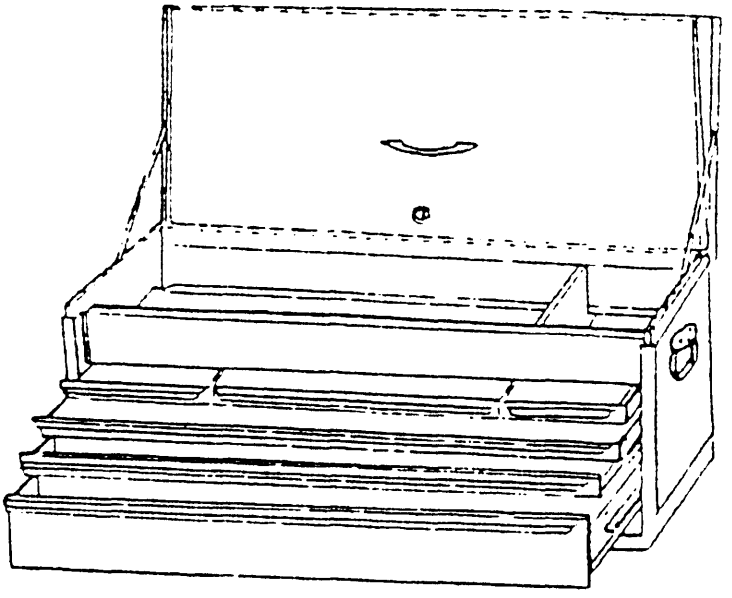


Figure 1. Type VI, mechanic's chest type.

3.3.1 Overall dimensions. The overall dimensions, excluding projections of the box, shall be 26 inches long, 13 inches front to back, and 15 inches high. The tolerance for each of these dimensions shall be ± 1 inch.

3.3.2 Container. The container shall be fabricated from not less than 20 gage sheet steel except that when 18 gage steel is used for each end and 20 gage steel is used for the bottom, not less than 22 gage steel shall be used for the back of the container. The thickness of the steel used to reinforce the container may be less than 20 gage.

3.3.3 Top cover and front panel. The top cover and front panel shall be fabricated from not less than 20 gage sheet steel except that when the top is of one piece, deep drawn, seamless construction, not less than 22 gage steel shall be used for the top cover and front panel. The thickness of the steel used to reinforce the top cover and front panel may be less than 20 gage. The front panel and top cover shall be joined by a continuous hinge, and the top cover and container shall be joined by a continuous hinge so that, when the tool box is open, the front panel folds back over the till-in-top as illustrated in figure 1. The hinges shall be formed as an integral part of the container, top cover, and front panel, or shall be either spot welded, seam welded, or riveted to the container, cover, and panel. The front panel, when in a closed position, shall cover and hold the drawers closed and be provided with an integral lock. The corners of the top cover shall be either square or rounded. The top cover shall open a minimum of 90° and shall open and close freely. The top cover shall be so designed that it will stand upright by itself when the cover is fully open. The ends of the front panel and top cover shall be flat folded or of double thickness, or have a 90° flange.

3.3.4 Drawers. The drawers shall be fabricated from not less than 22 gage sheet steel. The top front edge of each drawer shall be formed by one of the following methods: flat folded, double hemmed, inward to form a 90° flange, or open folded outward to form a drawer pull. All other edges may or may not be flat folded at the option of the contractor. The drawers shall slide easily on compound slides that will hold the drawer in a horizontal position when fully extended. Provisions shall be made to prevent accidental removal of drawers, but shall permit intentional removal when desired. Each drawer shall be provided with suitable drawer pulls or handles for opening and closing. The minimum inside dimensions of the three top drawers shall be 4-1/4 inches long, 10-1/4 inches front to back, and 1 inch deep. The minimum inside dimensions of the two center full width drawers shall be 22-1/4 inches long, 10-1/4 inches front to back, and 1 inch deep. The minimum inside dimensions of the bottom full width drawer shall be 22-1/4 inches long, 10-1/4 inches front to back, and 2-3/4 inches deep.

3.3.5 Till-in-top compartment. The till-in-top compartment shall be partitioned into a minimum of three sections, one of which shall be suitable for holding the tote tray. The partitions shall be fabricated from sheet steel which is not less than 24 gage and welded in place. The till-in-top compartment shall be not less than 2-1/4 inches deep. The exposed edges at the ends and front of the compartment shall be flat folded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.3.6 Handles. A conveniently located metal handle shall be provided on the front panel for opening and closing the tool box. A chest type metal handle shall be provided at each end of the tool box. The end handles shall be bolted, riveted, or welded to the tool box and shall swing out and stop at approximately 90° when in a carrying position and swing down against the box when not in use.

3.3.7 Tote tray. The tote tray shall be fabricated from not less than 22 gage sheet steel. The tote tray shall be constructed with a steel partition welded in place, extending the entire inside length of the tray, forming a compartment 1 inch wide at one end, and 1-3/4 inches wide at the opposite end for holding wrench sockets. The tolerance for each of these dimensions shall be ± 1/4 inch. The tote tray shall have a substantial handle across the top. The tray shall be designed to fit the till-in-top compartment and be not less than 18-1/2 inches long, 7-1/2 inches wide, and 1-1/2 inches high on the side edges.

3.4 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Federal Specification are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Sampling, inspection, and test procedures shall be in accordance with GGG-T-558/GEN, modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with 250 pounds of tools, lead shot, or other bulk material distributed between the till-in-top compartment and drawers, with at least 100 pounds distributed proportionally among the drawers.

4.1.2 Drop test. Not required.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558/GEN.

4.1.4 Top cover and front panel test. The top cover and front panel shall be opened and closed to assure compliance with 3.3.3.

4.1.5 Key and lock test. The box shall be locked and unlocked three times with each key to assure efficient operation of the keys and lock.

4.1.6 Drawer test. The drawers of each sample box shall be loaded with tools or other bulk material (5 pounds in the 4-1/4 inch long drawers and 10 pounds in all others) and opened and closed five times to assure compliance with 3.3.4.

4.1.7 Tray test. The tray of each sample tool box shall be loaded with 40 pounds of material and lifted 10 times. The box shall be rejected if the tray shows any distortion which would affect the serviceability of the tray.

4.1.8 Weld test. Tool boxes with welded seams shall be tested in accordance with GGG-T-558/GEN.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with GGG-T-558/GEN.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The tool boxes (chests) as furnished under this specification are for the storage of mechanic's hand tools and the like. They are not the type usually carried by the mechanic from job to job but are a type placed on a bench or stand for tool storage.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians

Army - GL
Air Force - 99

Review Activity

Army - MD

User Activities

Army - AR, AT, AV, ME
Navy - MC, YD

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.