GGG-T-558/7B
April 9, 1973
SUPERSEDING
Fed. Spec. GGG-T-558/7A
October 18, 1971

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (MACHINISTS', TILL-IN-TOP)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558 and covers the detail requirements for machinists' till-in-top tool boxes.

1.1.1 Federal specification coverage. Federal specifications do not cover all types and grades of the commodities indicated by the title of the specifications, but include only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Type and classes. Machinists' tool boxes shall be of the following type and classes as specified (see 6.1).

Type VIII - Machinists' till-in-top box.
Class 1 - Seven drawers (see 3.2.8).
Class 2 - Three drawers (see 3.2.9).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specification:

GGG-T-558 - Tool Box, Portable; General Specification For.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General requirements. The general requirements for the tool boxes shall be in accordance with GGG-T-558.

3.2 Type VIII. Type VIII tool boxes shall consist of a box body and lid, till-in-top compartment, drawers, front panel, handle, and hardware.

3.2.1 Material. Sheet steel of adequate thickness to insure compliance with the load and drop tests (see 4.1.1 and 4.1.2) shall be used in the fabrication of the tool boxes.

3.2.2 Box body and lid. The box body and lid shall be joined by a continuous hinge. The lid shall open a minimum of 90° and not more than 100°. The lid shall be designed to remain open unless it is manually closed. The lid shall open and close freely. The exposed front edge of the lid shall be flat folded or double hemmed inward. The top edges of the box shall be offset inward to accommodate the lid when the box is closed. The exposed edges of the offset shall be flat folded or double hemmed inward. Storage space for the front panel shall be provided under the bottom drawer (see 4.1.7).

3.2.3 Till-in-top compartment. The till-in-top compartment shall be lined on the bottom with cork, felt, flock, or other suitable material. The lining shall be free from starch or sizing and be secured with an oil-resistant adhesive (see 4.1.5).

3.2.4 Drawers. The top front edge of each drawer shall be formed by one of the following methods: flat folded inward, double hemmed inward, inward to form a 90° flange, or open folded outward to form a drawer pull. The drawers shall slide easily on compound slides that will hold the drawers in a horizontal position when fully extended (see 4.1.8). The compound slides shall be treated for corrosion resistance in accordance with commercial standards. Provisions shall be made to prevent accidental removal of the drawers, but shall permit removal of the drawers when desired. The drawers shall be provided with suitable drawer pulls or handles for opening and closing the drawers. An adjustable partition shall be furnished with each drawer, except the bottom one. The bottoms, sides, and ends of all drawers shall be lined with the material specified for the till-in-top compartment (see 3.2.3), or be furnished with a rsplaceable flocked liner.

3.2.5 Front panel. The front panel shall fit against the drawer pulls or handles and be flush with the front of the box when in a closed position (see 4.1.4). The panel shall be provided with a retaining device to hold the panel in a closed position when the lid is open. The retaining device shall permit easy removal and replacement of the panel when the lid of the box is open. A locking device shall also be provided that will prevent removal of the panel, except by means that would cause permanent and obvious damage, when the device is in the locked position (see 4.1.4). The panel shall have a recessed knob or handle for the removal and replacement of the panel. The outside surface of the panel shall be free of projections.

3.2.6 Handle. The handle shall be similar to that shown in figure 2, and made of metal or leather with a metal bushing in each end to prevent the bracket loop from cutting through the leather. The handle assembly shall be attached to the top center of the tool box by either riveting or welding and shall be capable of supporting the box during the load test (see 4.1.1) without permanent distortion.

3.2.7 Hardware. The hardware shall consist of an integral lock to lock the lid to the body of the box (see 4.1.6). Two suitable heavy duty luggage catches shall be attached to the body and lid of class 1 boxes to hold the box closed and shall be located as shown on figure 2.

3.2.8 Class 1. Class 1 boxes shall have seven drawers, be similar to figures 1, 2, and 3, and conform to the dimensions shown in table I.

3.2.9 Class 2. Class 2 boxes shall have three drawers, be similar to figures 3 and 4, and conform to the dimensions shown in table II.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

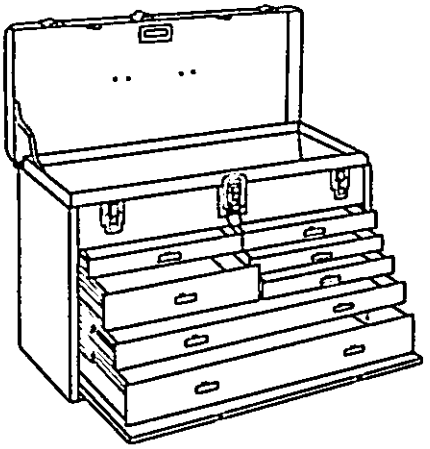


FIGURE 1. Type VIII, class 1 tool box.

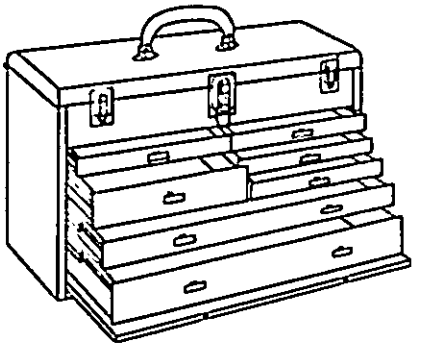


FIGURE 2. Type VIII, class 1 tool box.

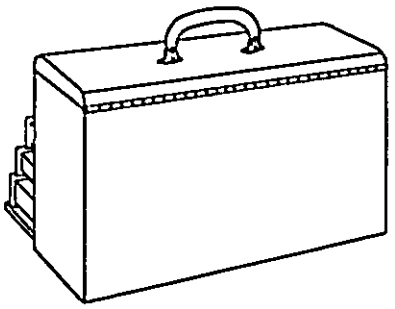


FIGURE 3. Type VIII, classes 1 and 2 tool boxes.

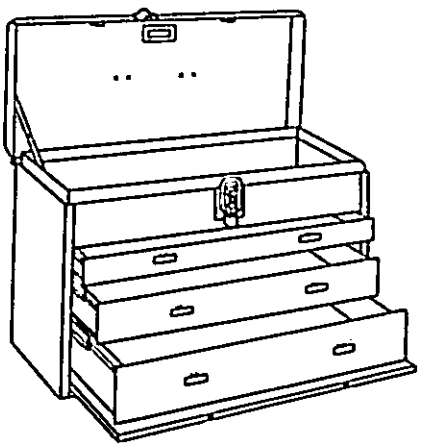


FIGURE 4. Type VIII, class 2 tool box.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

TABLE I. Type VIII, class 1, seven drawer boxes, overall dimensions, excluding projections

Length		Width		Depth	
Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
Inches	Inches	Inches	Inches	Inches	Inches
20	20-3/4	8-1/2	9-1/8	13	14-1/4

Inside dimensions

	Length		Width		Depth	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
	Inches	Inches	Inches	Inches	Inches	Inches
Till in top	19-1/2		7-3/4		2-7/16	3-3/4
Four drawers	8-9/16	9-1/8	7	8-1/8	7/8	1-1/16
One drawer	8-9/16	9-1/8	7	8-1/8	1-7/8	2-3/16
One drawer	18	18-15/16	7	8-1/8	1-5/16	1-9/16
One drawer	18	18-15/16	7	8-1/8	2-3/16	2-1/2

TABLE II. Type VIII, class 2, three drawer boxes, overall dimensions, excluding projections

Length		Width		Depth	
Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
Inches	Inches	Inches	Inches	Inches	Inches
20	20-3/4	8-1/2	9-1/8	13	14-1/4

Inside dimensions

	Length		Width		Depth	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
	Inches	Inches	Inches	Inches	Inches	Inches
Till in top	19-1/2		7-3/4		2-7/16	3-3/4
Top drawer	18	18-15/16	7	8-1/8	1-5/16	2
Center drawer	18	18-15/16	7	8-1/8	1-7/8	2-1/2
Bottom drawer	18	18-15/16	7	8-1/8	2-1/4	3-1/2

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Quality assurance provisions shall be in accordance with GGG-T-558, modified as follows.

4.1.1 Load test. Each sample shall be load tested with 100 pounds of tools, lead, or other bulk material distributed proportionally among the drawers.

4.1.2 Drop test. Not required.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558.

4.1.4 Front panel and lid test. The front panel shall be closed against the drawer handles or pulls to insure compliance with 3.2.5. The lid shall be closed from the open position by the free fall method a total of 10 times. The panel locking device and lid shall then be examined to determine that the device securely latches, and for any breakage that adversely affects the serviceability of the boxes.

4.1.5 Lining test. The hand shall be rubbed over the lining in each drawer and till a total of 3 times with the nominal weight of the hand. Loose material in the drawers, till, or the adherence of any material to the hand shall be cause for rejection.

4.1.6 Key and lock test. Each key shall be inserted into the lock and the box shall be locked and unlocked 3 times to insure efficient operation of the keys and lock.

4.1.7 Front panel storage space. The front panel shall operate freely in the storage space provided (see 3.2.2).

4.1.8 Drawer test. The drawers of each sample shall be loaded with lead, tools, or other bulk material as follows: 5 pounds in the 7/8 inch minimum depth drawers and 10 pounds in each of the other drawers. Each drawer shall be opened and closed 5 times, while loaded, to insure compliance with 3.2.4.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with GGG-T-558.

6. NOTES

6.1 Ordering data. In addition to ordering data included in GGG-T-558, purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and class required (see 1.2.1).

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - 84

Review Activities:

Army - GL, WC, MD
Navy - SH
Air Force - 84

User Activities:

Army - AT, AV, ME, MI
Navy - MC, YD

Preparing Activity:

GSA-FSS

U. S. GOVERNMENT PRINTING OFFICE : 1973 O - 514-179 (518)

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.