GGG-T-558/7C
October 19, 1992
SUPERSEDING
GGG-T-558/7B
April 9, 1973

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (MACHINISTS', TILL-IN-TOP)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558/GEN and covers the detail requirements for machinists' till-in-top tool boxes.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Type and classes. Machinists' tool boxes shall be of the following type and classes as specified (see 6.1).

Type VIII - Machinists' till-in-top box
Class 1 - Seven drawers
Class 2 - Three drawers

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

GGG-T-558/GEN - Tool Box, Portable; General Specification for

Federal Standards:

FED-STD-376 - Preferred Metric Units for General use by the Federal Government

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

3. REQUIREMENTS

3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of tool boxes otherwise conforming to this specification.

Distribution Statement A: Approved for public release; distribution is unlimited. FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.2 General requirements. The general requirements for the tool boxes shall be in accordance with GGG-T-558/GEN.

3.3 Type VIII. Type VIII tool boxes shall consist of a box body and lid, till-in-top compartment, drawers, front panel, handle, and hardware.

3.3.1 Material. Sheet steel of adequate thickness to insure compliance with the load test (see 4.1.1) shall be used in the fabrication of the tool boxes. In no instance shall the box body and lid be made of lighter than 22 gage steel.

3.3.2 Box body and lid. The box body and lid shall be joined by a continuous hinge. The lid shall open a minimum of 90° and not more than 100°. The lid shall be designed to remain open unless it is manually closed. The lid shall open and close freely. The exposed front edge of the lid shall be flat folded or double hemmed inward. The top edges of the box shall be offset inward to accommodate the lid when the box is closed. The exposed edges of the offset shall be flat folded or double hemmed inward. Storage space for the front panel shall be provided under the bottom drawer (see 4.1.7).

3.3.3 Till-in-top compartment. The till-in-top compartment shall be lined on the bottom with cork, felt, flock, or other suitable material. The lining shall be free from starch or sizing and be secured with an oil-resistant adhesive (see 4.1.5).

3.3.4 Drawers. The top front edge of each drawer shall be formed by one of the following methods: flat folded inward, double hemmed inward, inward to form a 90° flange, or open folded outward to form a drawer pull. The drawers shall slide easily on compound slides that will hold the drawers in a horizontal position when fully extended (see 4.1.8). The compound slides shall be treated for corrosion resistance in accordance with commercial standards. Provision shall be made to prevent accidental removal of the drawers, but shall permit removal of the drawers when desired. The drawers shall be provided with suitable drawer pulls or handles for opening and closing the drawers. An adjustable partition shall be furnished with each drawer, except the bottom one. The bottoms, sides, and ends of all drawers shall be lined with the material specified for the till-in-top compartment (see 3.3.3), or be furnished with a replaceable flocked liner.

3.3.5 Front panel. The front panel shall fit against the drawer pulls or handles and be flush with the front of the box when in a closed position (see 4.1.4). The panel shall be provided with a retaining device to hold the panel in a closed position when the lid is open. The retaining device shall permit easy removal and replacement of the panel when the lid of the box is open. A locking device shall also be provided that will prevent removal of the panel, except by means that would cause permanent and obvious damage, when the device is in the locked position (see 4.1.4). The panel shall have a recessed knob or handle for the removal and replacement of the panel. The outside surface of the panel shall be free of projections.

3.3.6 Handle. The handle shall be similar to that shown in figure 2, and made of metal or leather with a metal bushing in each end to prevent the bracket loop from cutting through the leather. The handle assembly shall be attached to the top center of the tool box by either riveting or welding and shall be capable of supporting the box during the load test (see 4.1.1) without permanent distortion.

3.3.7 Hardware. The hardware shall consist of an integral lock to lock the lid to the body of the box (see 4.1.6). Two suitable heavy duty luggage catches shall be attached to the body and lid of class 1 boxes to hold the box closed and shall be located as shown on figure 2.

3.3.8 Class 1. Class 1 boxes shall have seven drawers, be similar to figures 1, 2, and 3, and conform to the dimensions shown in table I.

3.3.9 Class 2. Class 2 boxes shall have three drawers, be similar to figures 3 and 4, and conform to the dimensions shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

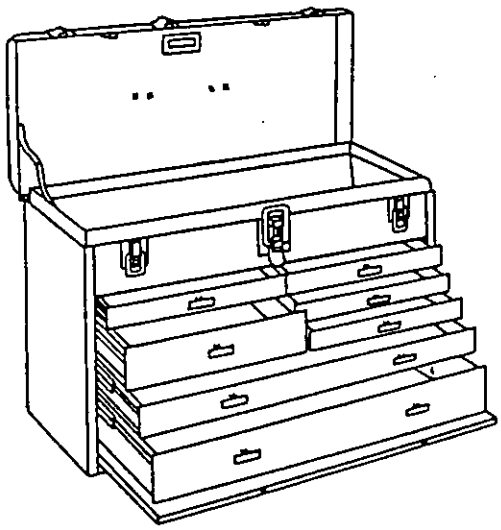


Figure 1. Type VIII, class 1 tool box.

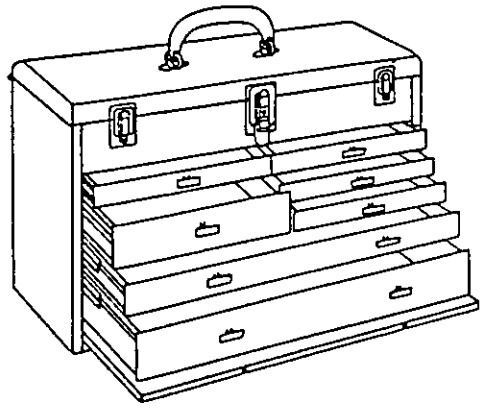


Figure 2. Type VIII, class 1 tool box.

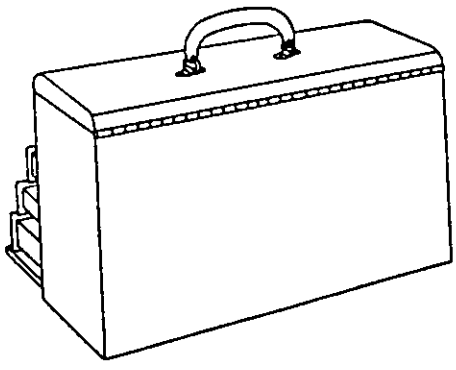


Figure 3. Type VIII, classes 1 and 2 tool boxes.

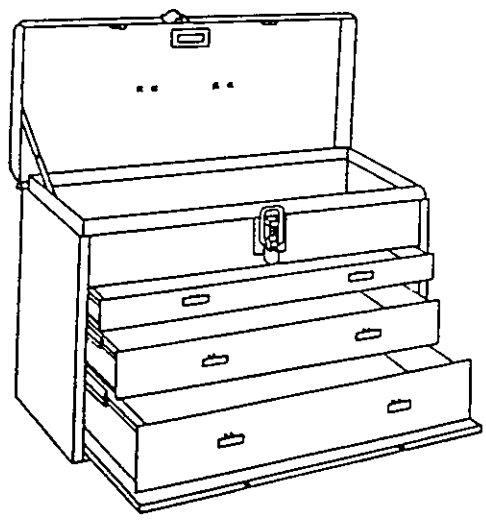


Figure 4. Type VIII, class 2 tool box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

TABLE I. Type VIII, class 1, seven drawer boxes, overall dimensions, excluding projections

Length		Width		Depth	
Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
Inches	Inches	Inches	Inches	Inches	Inches
20	20-3/4	8-1/2	9-1/8	13	14-1/4

Inside dimensions

	Length		Width		Depth	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
	Inches	Inches	Inches	Inches	Inches	Inches
Till-in-top	19-1/2	-	7-3/4	-	2-7/16	3-3/4
Four drawers	8-9/16	9-1/8	7	8-1/8	7/8	1-1/16
One drawer	8-9/16	9-1/8	7	8-1/8	1-7/8	2-3/16
One drawer	18	18-15/16	7	8-1/8	1-5/16	1-9/16
One drawer	18	18-15/16	7	8-1/8	2-3/16	2-1/2

TABLE II. Type VIII, class 2, three drawer boxes, overall dimensions, excluding projections

Length		Width		Depth	
Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
Inches	Inches	Inches	Inches	Inches	Inches
20	20-3/4	8-1/2	9-1/8	13	14-1/4

Inside dimensions

	Length		Width		Depth	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
	Inches	Inches	Inches	Inches	Inches	Inches
Till-in-top	19-1/2	-	7-3/4	-	2-7/16	3-3/4
Top drawer	18	18-15/16	7	8-1/8	1-5/16	2
Center drawer	18	18-15/16	7	8-1/8	1-7/8	2-1/2
Bottom drawer	18	18-15/16	7	8-1/8	2-1/4	3-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Sampling, inspection, and test procedures shall be in accordance with GGG-T-558/GEN, modified as follows.

4.1.1 Load test. Each sample tool box shall be load tested with 100 pounds of tools, lead shot, or other bulk material distributed proportionally among the drawers.

4.1.2 Drop test. Not required.

4.1.3 Hinge pin test. The hinge pin test shall be in accordance with GGG-T-558/GEN.

4.1.4 Front panel and lid test. The front panel shall be closed against the drawer handles or pulls to insure compliance with 3.3.5. The lid shall be closed from the open position by the free fall method a total of 10 times. The panel locking device and lid shall then be examined to determine that the device securely latches, and for any breakage that adversely affects the serviceability of the boxes.

4.1.5 Lining test. The hand shall be rubbed over the lining in each drawer and till a total of three times with the nominal weight of the hand. Loose material in the drawers, till, or the adherence of any material to the hand shall be cause for rejection.

4.1.6 Key and lock test. Each key shall be inserted into the lock and the box shall be locked and unlocked three times to insure efficient operation of the keys and lock.

4.1.7 Front panel storage space. The front panel shall operate freely in the storage space provided (see 3.3.2).

4.1.8 Drawer test. The drawers of each sample shall be loaded with lead shot, tools, or other bulk material as follows: 5 pounds in the 7/8 inch minimum depth drawers and 10 pounds in each of the other drawers. Each drawer shall be opened and closed five times while loaded, to insure compliance with 3.3.4.

4.1.9 Weld test. Tool boxes with welded seams shall be tested in accordance with GGG-T-558/GEN.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with GGG-T-558/GEN.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Class required (see 1.2.1).

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians

Army - GL
Air Force - 99

Review Activity

Army - MD

User Activities

Navy - MC, YD

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.