GGG-T-558/9B
April 9, 1973
SUPERSEDING
Fed. Spec. GGG-T-558/9A
March 18, 1971

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (HELICAL THREAD REPAIR)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558, and covers the detail requirements for helical thread repair tool boxes.

1.2 Classification (see 6.2).

1.2.1 Types. Tool boxes shall be of the following types, as specified (see 6.2).

Type I - Tool box, portable partitioned.

Type II - Module tool box.
Size 1
Size 2
Size 3
Size 4

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specification:

GGG-T-558 - Tool Box, Portable; General Specification For.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 20260-26T12:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General requirements. The general requirements for this tool box shall be in accordance with GGG-T-558.

3.2 Type X tool box, portable, partitioned. Type X tool boxes shall be similar to figure 1 and shall consist of a body, lid, handle, hardware, 2 racks (see 3.2.2), and unless otherwise specified (see 6.2), 8 flat dividers and 6 "T" dividers (see 3.2.3). The tool boxes shall be fabricated in one size as specified on figure 1.

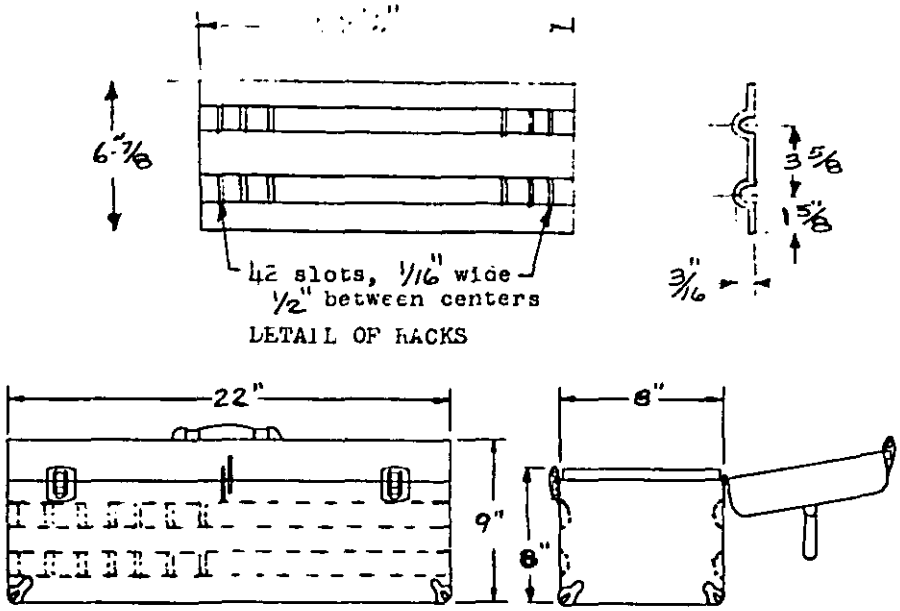


FIGURE 1. Type X, tool box, portable, partitioned.

3.2.1 Box body and lid. The box shall be fabricated from not less than 22 gage sheet steel. The lid shall be not less than 18 gage sheet steel. The outside lower corners of the body shall be reinforced for added strength and protection. The front and ends of body at the top shall be offset to allow the lid to close flush with the front and ends of the body. The top edge of the body at the front and ends, and front edge of the lid shall be flat folded.

3.2.2 Racks. The racks shall be fabricated from not less than 22 gage sheet steel. They shall be spot welded to the inside front and rear wall of the box body, and shall be so positioned that dividers will be in alignment when inserted.

3.2.3 Dividers. The dividers shall be fabricated from 24 gage sheet steel and be similar to figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

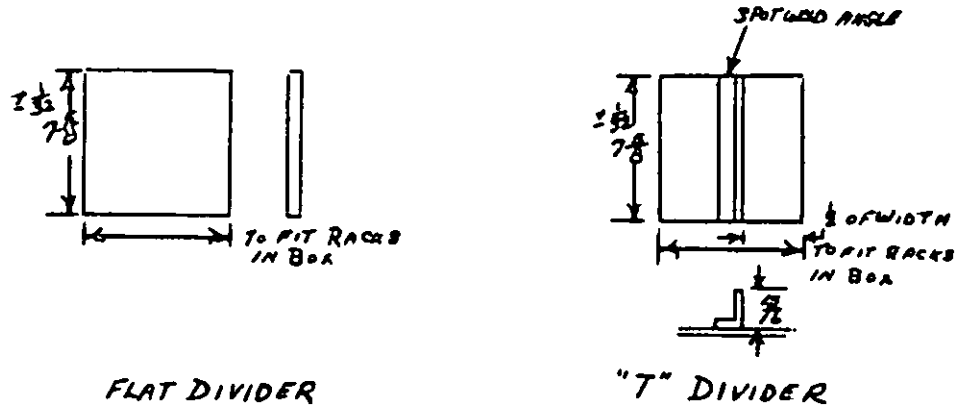


FIGURE 2. Type X, tool box dividers.


3.2.4 Handle. The handle shall be of a material, size, and shape suitable for lifting and carrying the tool box when loaded as specified for the load test (see 4.1.1). It shall be comfortable to the hand and inert in oil, grease, and other compounds usually used in a garage or machine shop.

3.2.4.1 Mounting bracket. The handle mounting bracket shall be located and attached to the top center of the tool box. Its design shall permit the handle to swing or be folded down against the box.

3.2.5 Hardware. Hardware shall consist of two draw bolt type locks attached near each end of the front of the box and a hasp and staple or similar hardware to accommodate a 1-3/4 inch padlock attached to the center of the front of the tool box.

3.3 Type XI module tool box, sizes 1, 2, 3, and 4. The type XI tool boxes shall be similar to figure 3 and shall consist of a body, lid, handle, and friction catch. The boxes shall be fabricated in the sizes specified on figure 3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

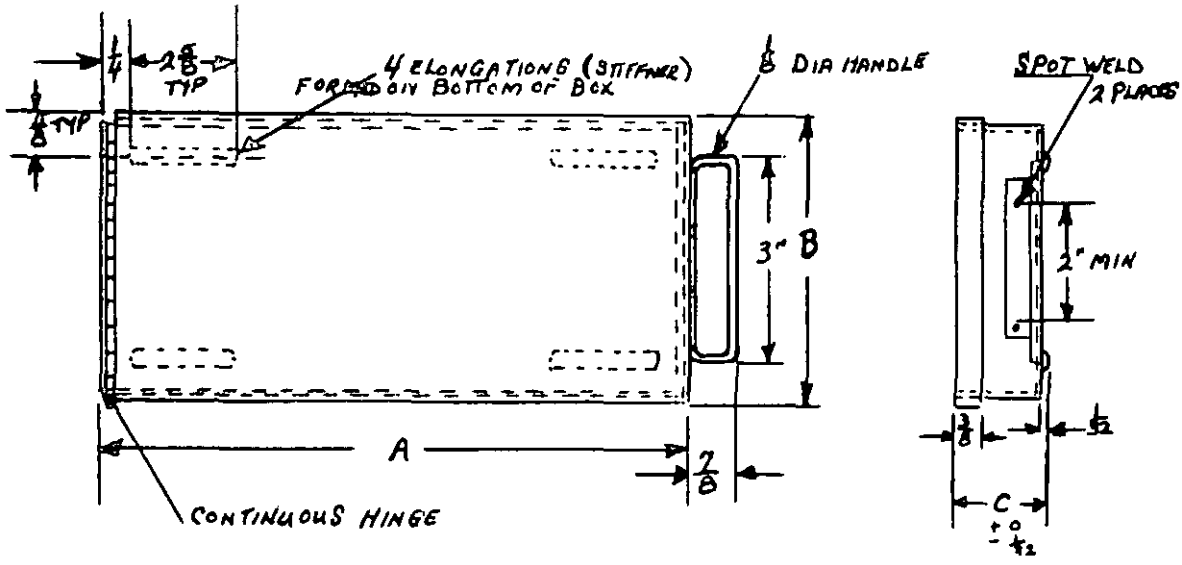

DIMENSIONS	INCHES		
Size No.	A	B	C
1	8-5/8	7-3/8	2-15/16
2	8-5/8	7-3/8	1-15/16
3	8-5/8	7-3/8	1-7/16
4	8-5/8	3-5/8	15/16

FIGURE 3. Type XI, sizes 1, 2, 3, and 4 module tool boxes.

3.3.1 Box body and lid. The box body and lid shall be fabricated from not less than 24 gage sheet steel. The box body and lid shall have square corners, corners to be lap joints and spot welded. The lid shall have a 90°, 3/8-inch flange, formed to fit over the box body and shall have a minimum opening of 95°. The box shall contain 4 elongated projections in the bottom of the box in accordance with the dimensions shown in figure 3.

3.3.2 Handle. The handle shall be constructed in accordance with the dimensions and configuration shown in figure 3. Handle shall be so formed that it will not protrude over the box body and lid when folded flat against the box.

3.3.3 Hinge. The hinge shall be in accordance with GGG-T-558, except that the hinge pins need not be nonremovable.

3.3.4 Friction catch. The friction catch shall be located on the front center of the box and lid. The friction catch may be an integral part of the box.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Quality assurance provisions shall be in accordance with GGG-T-558 modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with tools, lead shot, or other bulk material as follows: Type I - 100 pounds, type II - 20 pounds.

4.1.2 Drop test. Each sample shall be drop tested when loaded with tools, lead shot, or other bulk material as follows: Type I - 25 pounds, type II - 5 pounds.

4.1.3 Hinge pin test. Hinge pin test shall be in accordance with GGG-T-558 for type I tool boxes only.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with GGG-T-558.

6. NOTES

6.1 Intended use. Tool boxes furnished under this specification are for the storage of tools normally used by mechanics for repairing female threads.

6.2 Ordering data. In addition to ordering data included in GGG-T-558, purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, size required (see 1.2.1).
(c) Divider requirements, when different (see 3.2).

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - 84

Review Activities:

Army - GL, MC, MD
Navy - SH
Air Force - 84

User Activities:

Army - AT, AV, ME, MI
Navy - MC, YD

Preparing Activity:

GSA-FSS

U. S. GOVERNMENT PRINTING OFFICE : 1979 O - 314-179 (519)

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TD
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.