GGG-T-558/9C
October 19, 1992
SUPERSEDING
GGG-T-558/9B
April 9, 1973

FEDERAL SPECIFICATION

TOOL BOX, PORTABLE (HELICAL THREAD REPAIR)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification forms a part of the latest issue of GGG-T-558/GEN, and covers the detail requirements for helical thread repair tool boxes.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types. Tool boxes shall be of the following types, as specified (see 6.2).

Type X - Tool box, portable, partitioned

Type XI - Module tool box
- Size 1
- Size 2
- Size 3
- Size 4

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

GGG-T-558/GEN - Tool Box, Portable; General Specification for

Federal Standards:

FED-STD-376 - Preferred Metric Units for General Use by the Federal Government

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

3. REQUIREMENTS

3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of tool boxes otherwise conforming to this specification.

Distribution Statement A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.2 General requirements. The general requirements for this tool box shall be in accordance with GGG-T-558/GEN.

3.3 Type X tool box, portable, partitioned. Type X tool boxes shall be similar to figure 1 and shall consist of a body, lid, handle, hardware, two racks, and unless otherwise specified (see 6.2), eight flat dividers and six "T" dividers. The tool boxes shall be fabricated in one size as specified on figure 1.

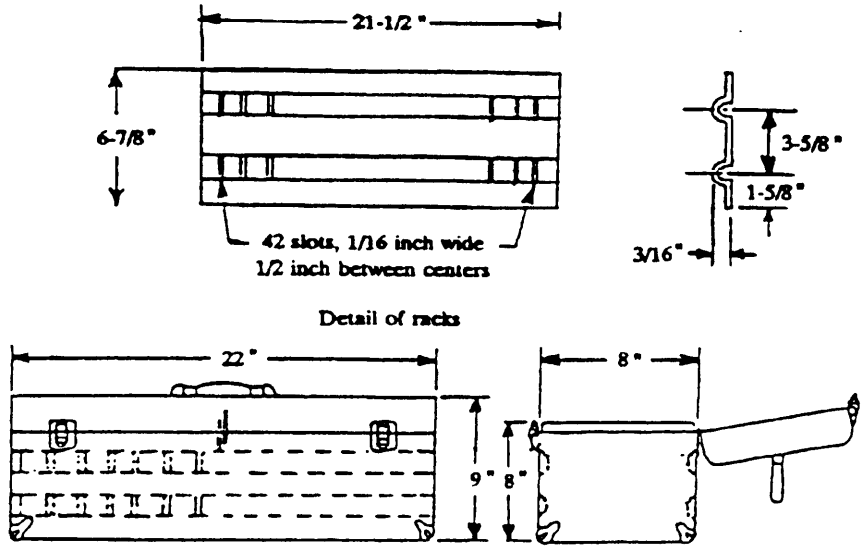


Figure 1. Type X, tool box, portable, partitioned.

3.3.1 Box body and lid. The box shall be fabricated from not less than 22 gage sheet steel. The lid shall be not less than 18 gage sheet steel. The outside lower corners of the body shall be reinforced for added strength and protection. The front and ends of body at the top shall be offset to allow the lid to close flush with the front and ends of the body. The top edge of the body at the front and ends, and front edge of the lid shall be flat folded.

3.3.2 Racks. The racks shall be fabricated from not less than 22 gage sheet steel. Racks shall be spot welded to the inside front and rear wall of the box body, and shall be so positioned that dividers will be in alignment when inserted.

3.3.3 Dividers. The dividers shall be fabricated from 24 gage sheet steel and be similar to figure 2.

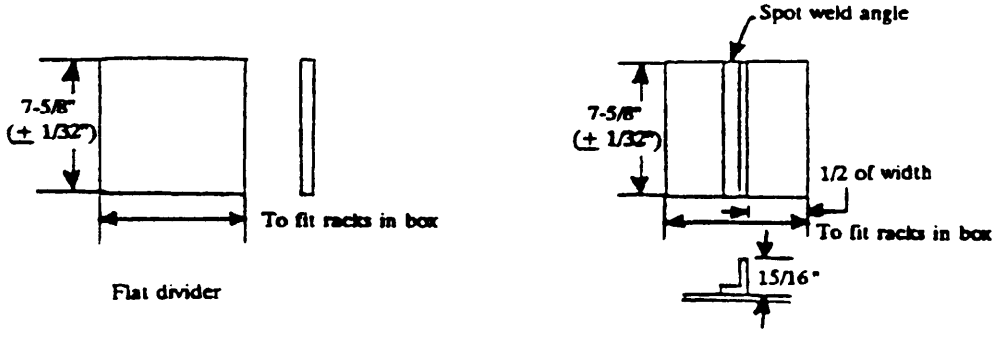


Figure 2. Type X, tool box dividers.


Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the currentversion before use.

3.3.4 Handle. The handle shall be of a material, size, and shape suitable for lifting and carrying the tool box when loaded as specified for the load test (see 4.1.1). The handle shall be comfortable to the hand and inert in oil, grease, and other compounds usually used in a garage or machine shop.

3.3.4.1 Mounting bracket. The handle mounting bracket shall be located and attached to the top center of the tool box. Mounting bracket design shall permit the handle to swing or be folded down against the box.

3.3.5 Hardware. Hardware shall consist of two draw bolt type locks attached near each end of the front of the box and a hasp and staple or similar hardware to accommodate a 1-3/4 inch padlock attached to the center of the front of the tool box.

3.4 Type XI module tool box, sizes 1, 2, 3, and 4. The type XI tool boxes shall be similar to figure 3 and shall consist of a body, lid, handle, and friction catch. The boxes shall be fabricated in the sizes specified on figure 3.

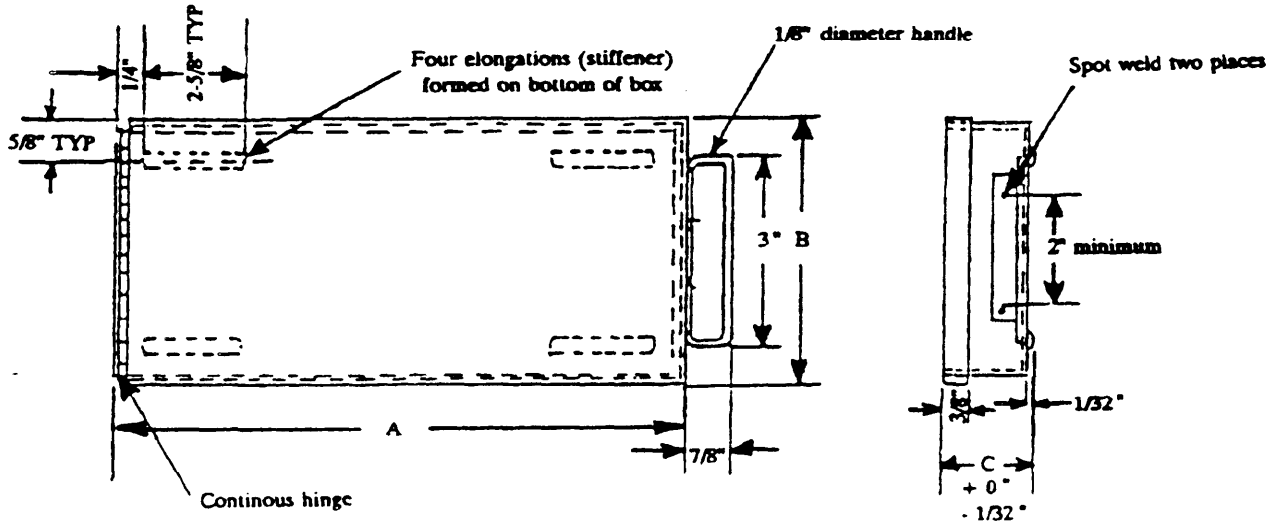

Dimensions (inches)			
Size	A	B	C
1	8-5/8	7-3/8	2-15/16
2	8-5/8	7-3/8	1-15/16
3	8-5/8	7-3/8	1-7/16
4	8-5/8	3-5/8	15/16

Figure 3. Type XI, sizes 1, 2, 3, and 4 module tool boxes.

3.4.1 Box body and lid. The box body and lid shall be fabricated from not less than 24 gage sheet steel. The box body and lid shall have square corners, corners to be lap joints and spot welded. The lid shall have a 90°, 3/8 inch flange, formed to fit over the box body and shall have a minimum opening of 95°. The box shall contain four elongated projections in the bottom of the box in accordance with the dimensions shown in figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.4.2 Handle. The handle shall be constructed in accordance with the dimensions and configuration shown in figure 3. Handle shall be so formed that it will not protrude over the box body and lid when folded flat against the box.

3.4.3 Hinge. The hinge shall be in accordance with GGG-T-558/GEN, except that the hinge pins need not be nonremovable.

3.4.4 Friction catch. The friction catch shall be located on the front center of the box and lid. The friction catch may be an integral part of the box.

3.5 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Federal Specification are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Sampling, inspection, and test procedures shall be in accordance with GGG-T-558/GEN modified as follows.

4.1.1 Load test. Each sample shall be load tested when loaded with tools, lead shot, or other bulk material as follows: type X - 100 pounds, type XI - 20 pounds.

4.1.2 Drop test. Each sample shall be drop tested in accordance with GGG-T-558/GEN, when loaded with tools, lead shot, or other bulk material as follows: type X - 25 pounds, type XI - 5 pounds.

4.1.3 Hinge pin test. Hinge pin test shall be in accordance with GGG-T-558/GEN for type X tool boxes only.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with GGG-T-558/GEN.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. Tool boxes furnished under this specification are for the storage of tools normally used by mechanics for repairing female threads.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type, size required (see 1.2.1).
c. Divider requirements, when different (see 3.3).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the currentversion before use.

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians

Army - GL
Air Force - 99

Review Activity

Army - MD

User Activities

Army - AR, AT, AV, ME
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.