MILITARY SPECIFICATION

CAP, GARRISON, WOMAN'S (COAST GUARD)

This Amendment forms a part of Military Specification MIL-C-87014A(CG), dated 2 February 1982.

Page 1

Delete Preamble in its entirety and substitute the following: "This specification is approved for use by the United States Coast Guard and is available for use by the Department of Transportation.".

Para. 1.1 lines 1 and 2 - Delete "double knit" and substitute "and wool".

Para. 2.1 SPECIFICATIONS FEDERAL Add the following "NN-P-71 -Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way"

MILITARY - Delete "MIL-C-29150 -Cloth, Double Knit, Polyester, Twill" and substitute the following:

"MIL-C-368 -Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-823 -Cloth, Serge; Wool and Nylon, Polyester and Wool
MIL-P-15011-Pallet, Material Handling, Wood, Post Construction, 4 Way Entry".

Following "MIL-T-43548 -Thread, Polyester, Cotton-covered" add "and Rayon-Covered".

Para. 2.1 STANDARDS, FEDERAL - Add "FED-STD-191 -Textile Test Methods"
STANDARDS, MILITARY -Add "MIL-STD-147 -Palletized Unit Loads"

Para. 2.2 Delete lines 13-17 in their entirety and substitute the following:
"The Color Association of the United States, Inc.
Standard Shade for Threads - 1968
(Application for copies of color cards should be addressed to the Color Association of the U.S.,Inc., 343 Lexington Ave., New York, NY 10016).".

Page 2

Add "2.3 Order of precedence. In the event of a conflict between the text of this specification and the reference cited herein, the text of this specification shall take precedence.".

ASMC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Page 3

Para. 3.3.1 Delete in its entirety and substitute the following: "Basic Material. The basic material for the cap shall be 11.3 oz./lin. yd, polyester/wool serge cloth conforming to type III, class 3 of MIL-C-823. The color shall be Blue 3362.".

Para. 3.3.3 Delete in its entirety and substitute the following: "Lining. The material for lining the crown sides and crown top shall be a rayon twill, 3.7 oz./yd^2, conforming to class 1 of MIL-C-368. The material shall match the shade of the basic material.".

Page 4

Para. 3.3.4 Delete in its entirety and substitute the following: "Thread, polyester, covered. The thread for seaming and stitching the caps shall be ticket numbers 50 and 70, 3 or 2 ply, of MIL-T-43548. The color shall be Black AA, C.A. 66043 in accordance with Standard Shade for Thread.".

Para. 3.3.4.1 Delete in its entirety and substitute the following: "Colorfastness. The dyed thread shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in MIL-T-43548. When no standard sample is available, the dyed threads shall show good colorfastness to wet-dry cleaning and light when tested as specified in MIL-T-43548.".

Para. 3.3.5.1 line 11 Delete in its entirety and substitute the following: "BASE FABRIC: POLYESTER (55%) AND WOOL (45%)".
Following line 13 add "Name of Contractor:".
On the right end of the label add the following printed sideways "DRY CLEAN ONLY".

Para. 3.3.5.2 Delete in its entirety.

Page 5

Para. 3.4 lines 2 and 3 Delete "with fusible material, a one piece apron lined with fusible material," and substitute "a rayon lining, a one piece apron,".

Para. 3.5.1 line 5 Delete "Fused" and substitute "Cloth,".

Add the following to the parts list:

"Lining, rayon	Crown side lining	2
	Crown top lining (gusset)	1"

Page 6

Para. 3.7.1 line 2 Delete ", ticketed or bundled" and substitute "or ticketed".
Para. 3.7.3 Delete in its entirety

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Page 7

Table II Oper. 1 line 1 Following "Cutting" add "and overedging apron".

Table II Oper. 1b. Delete in its entirety and substitute the following: "b. All component basic material parts shall be cut from one piece of material. The outside of the cap shall have a right hand twill line.".

Table II Add the following "1d. Component lining parts may be cut from ends. They shall approximately match the main assembly and shall be shade marked. 1e. Overedge top raw edge of apron. 503 or 504 or 505, EFd-1, 8-10, 50, 50."

Table II Oper. 3. line 2 Delete "fused" and add "and lining" following "cloth".

line 3 Delete ", ticketed, or bundled" and substitute "or ticketed".

Page 8

Table II Oper. 4a. Delete line 1 and substitute the following: "Superimpose the crown top lining on the crown top wrong sides face to face and fold piece in half in the".

Table II Oper. 4a. Following last sentence add "Join the outer edges of the crown top lining and crown top by stitching 1/4 inch from raw edges.".
Add the following to stitch type of Oper. 4a "and SSa-1".

Pages 8 and 9

Table II Oper. 4b, c, d, e and f. Delete in their entirety and substitute the following:
"4b. Join the left and right crown sides at front and back ends of cap with a 3/8 inch seam from the lower edge up to the notch.
301 or 401, SSz-3(a), 50 50, 50 50

4c. Join the left and right lining crown sides at front and back ends of cap with a 3/8 inch seam from the lower edge up to the notch.
301 or 401, SSz-3(a), 50 50, 50 50

4d. Spread seam allowance of front and back ends of crown side piece open and flat, and topstitch 1/16 inch along both sides of the seam and across seam, starting at lower edge and crossing over seam at notch.
301 or 401, SSz-3(b), 50 50, 50 50

4e. Join crown top at front and back ends of crown sides face to face by stitching from point of gusset to notch on both ends.
301 or 401, SSa-1, 50 50

4f. Join top edges of crown side and crown side lining with the crown top between the two plies, match notches and stitch 3/16 to 1/4 inch from raw edges.
301 or 401, SSa-1, 10-12, 50 50, 50 50"

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Pages 8 and 9 (Cont.)

Add the following:

" 4g. Join top edges of opposite side crown side and crown side lining with the crown top between the two plies, match notches and stitch 3/16 to 1/4 inch from raw edges.
301 or 401, SSa-1, 10-12, 50 50, 50 50

4h. Spread crown top (gusset) and crown side seam open and flat and topstitch each side of the top crown 1/16 inch from side to crown top seam. Care should be taken to not catch the lining in the stitching.
301 or 401, LSq-2(b), 10-12, 50 50, 50 50

4i. Spread lining front and back end seams open and flat and overedge together the basic material and lining along bottom edge of crown.
503 or 504 or 505, EFd-1, 8-10, 50 50".

Page 10

Table II Oper 7a. Following last sentence add "Care shall be taken to avoid pulling sweatband too tight, causing wrinkles on outside lower bottom edge.".

Page 11

Table II Oper 9a Delete in its entirety and substitute the following: "Press only the topstitched top crown seams and the lower bottom edge with a hand press.".

Page 12

Table III Add the following column:

"Head Measurement F
21-1/4
21-3/4
22-1/4
22-3/4
23-1/4
23-3/4
24-1/4
24-3/4
25-1/4
± 1/4 "

NOTE - delete "E" and substitute "F".

Add - "F. Measurement shall be taken from folded edge straight across and parallel to top of cap, to the opposite folded edge then doubled."

Page 13

Add the following "4.1.2 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.".

Para. 4.4.1 Delete the second, seventh, eighth, and tenth sentences.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table IV line 3 - Delete "laundering" and substitute "wet-dry cleaning"
Delete Test Method "5614 1/" and substitute "5622"
Delete all reference to Fusible Material and Footnotes 1 and 2.

Para. 4.4.1.1 Delete in its entirety.

Para. 4.4.2. through Para. 4.4.2.2.2 Delete in their entirety

Add the following "4.4.4 Packaging inspection. Packaging inspection shall be in accordance with the provisions of MIL-STD-902.".

Add the following "4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps ac specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.".

Para. 5.1.1 line 1 Delete "with an instruction label (see 3.3.5.2),".

Para. 5.2.1 line 3 Delete "SF" and substutute "CF".
line 4 Delete "V2s" and substitute "V15C, variety DW"
line 5 Delete "weather resistant, variety DW, grade V15c" and substitute "domestic,".
line 7 Add "Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.".

Para. 5.2.2 line 3 Delete "grade 275," and substitute "variety DW, grade 200,"
lines 4 and 5 Delete "variety DW, grade 200,".
line 7 Add "Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Page 16 (Cont.)

Para. 5.2.2.1 Delete in its entirety.

Add the following:

"5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "Mixed Sizes" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

"5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with Bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 of wood group I, II, III, or IV, Grade A of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.".

Page 17

Para. 6.2 Delete "e." in its entirety and substitute the following: "e. When palletization is required (see 5.4)."

Page 18

Delete Figure 1 and substitute the following page.


Custodian:
Navy - NU


Review Activity:
Navy-CG
DLA - CT

Preparing Activity:
Navy - NU

Project No. 8410-N624

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

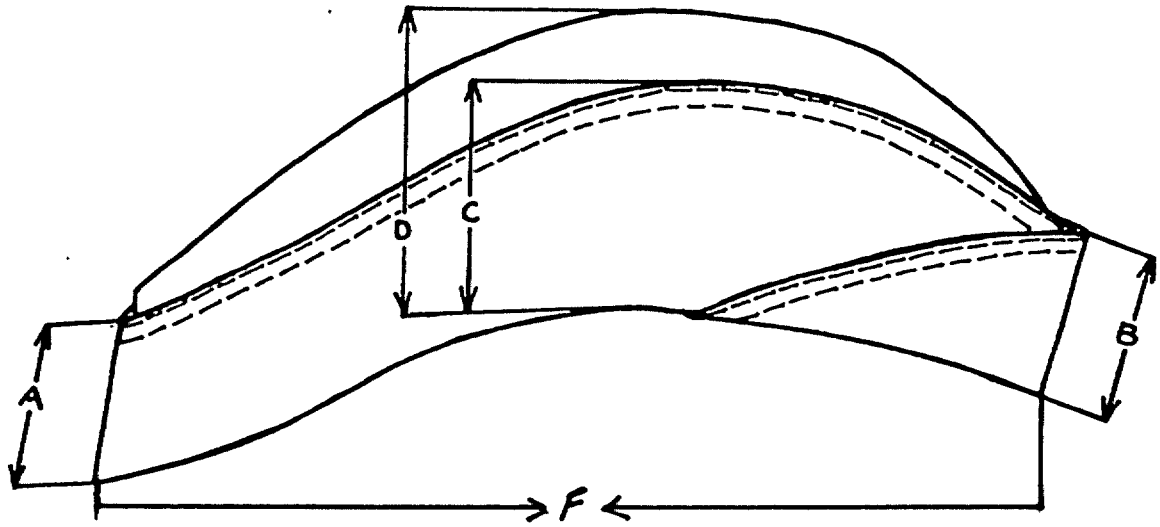



TOP VIEW OF TOP CROWN
(GUSSET)

FIGURE 1 - CAP, GARRISON, WOMAN'S (COAST GUARD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.