INCH-POUND

MIL-DTL-85800/5A
1 May 2019
SUPERSEDING
MIL-H-85800/5(AS)
16 May 1988

DETAIL SPECIFICATION SHEET

HOSE ASSEMBLIES, POLYTETRAFLUOROETHYLENE, ARAMID FIBER REINFORCED, 5000 AND 8000 PSI, DESIGN STANDARD FOR STYLE 45 DEGREES TO 90 DEGREES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-85800.

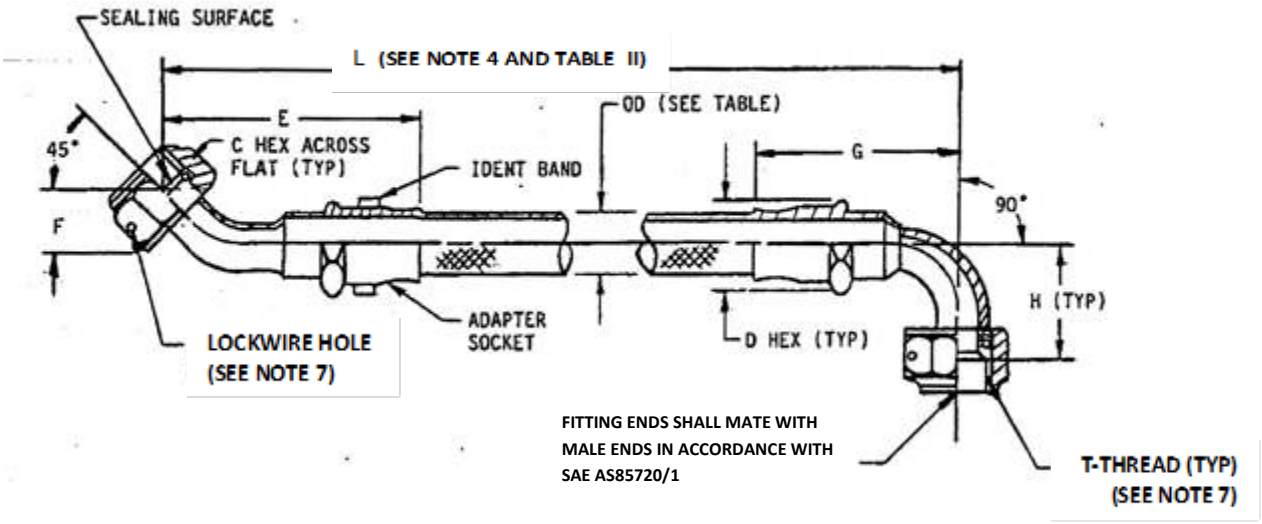


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:29Z
Check the source to verify that this is the current version before use.

TABLE I. Hose dimensions and design data.

Dash no	Hose size	Thread T per SAE AS8879	B dia min	C hex	D hex	E max	F		G max	H		ID min	OD max	Hose wt max lbs/in
							Min	Max		Min	Max			
-03	.125	.3750-28UNJS-3B	.063	.438	.550	2.070	.450	.550	1.680	.769	.929	.125	.395	.005
-04	.250	.4375-24UNJS-3B	.109	.562	.690	2.510	.450	.550	2.190	.795	.983	.212	.490	.008
-06	.375	.5625-20UNJS-3B	.188	.688	.960	2.900	.517	.600	2.540	1.000	1.125	.298	.730	.019
-08	.500	.7188-20UNJS-3B	.313	.875	1.200	2.920	.513	.675	3.180	1.033	1.240	.391	.940	.028
-10	.625	.8438-18UNJS-3B	.375	1.000	1.300	3.900	.620	.765	3.530	1.258	1.445	.485	1.090	.036
-12	.750	1.0000-16UNJS-3B	.469	1.125	1.650	4.610	.760	.874	4.260	1.530	1.954	.602	1.405	.060
-14	.875	1.1250-16UNJS-3B	.595	1.250	1.750	4.820	.830	.910	4.450	1.750	1.875	.745	1.625	.075
-16	1.000	1.2500-14UNJS-3B	.719	1.375	1.900	4.960	.890	.950	4.620	1.860	1.920	.852	1.825	.104

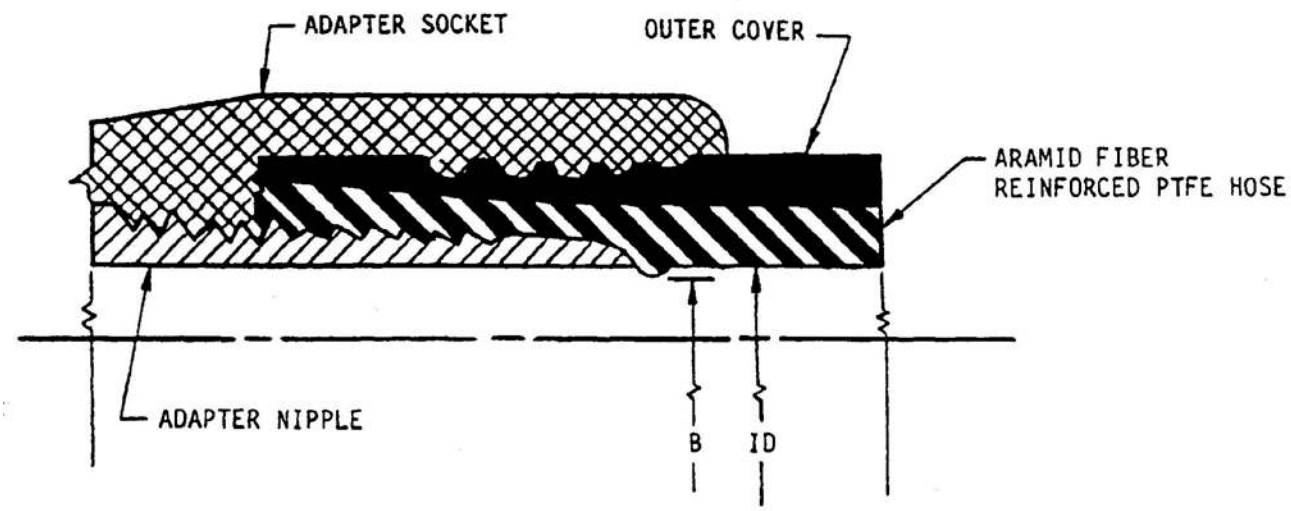


FIGURE 2. Hose fitting detail (see table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:29Z
Check the source to verify that this is the current version before use.

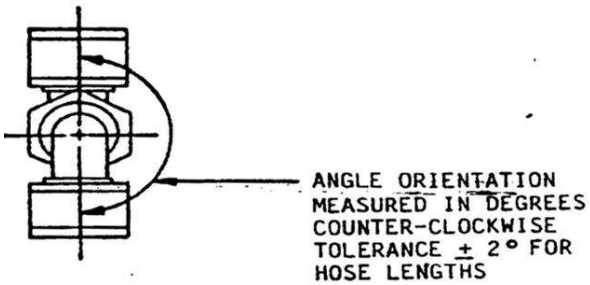


FIGURE 3. Turn angle between ends.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance for decimals ±0.010 inch; angles ±1 degree.
3. Fitting ends shall mate with male ends in accordance with SAE AS85720/1.
4. Length "L" is measured from outer corner of sealing surface to outer corner of sealing surface. See table II for available length increments and tolerances.
5. A true circular cross section is not required through the end fitting. However, the ball diameter B listed in table I shall pass through the hose assemblies.
6. Thread T shall conform with SAE AS8879.
7. The lockwire holes shall be spaced 180º apart.
8. The part number shall be designated to reflect the base assembly number, size, lockwire code, hose length and angle of orientation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:29Z
Check the source to verify that this is the current version before use.

TABLE II. Hose length increments.

Hose assembly length	Available increment	Tolerance
Under 18 inches	Not less than 0.1 inch	± 0.100 inch
18 to 36 inches	Not less than 0.2 inch	± 0.200 inch
36 to 50 inches	Not less than 0.5 inch	± 0.500 inch
Over 50 inches	Not less than 1 inch	± 1.000 inch

Example of Part or Identifying Number (PIN):

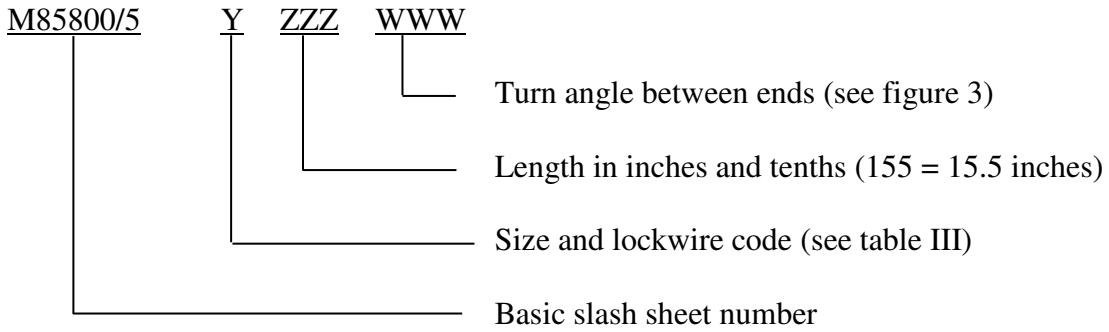


TABLE III. Hose and lockwire code.

Code	Designation
A	03 no lockwire
B	03 with lockwire
C	04 no lockwire
D	04 with lockwire
E	06 no lockwire
F	06 with lockwire
G	08 no lockwire
H	08 with lockwire

Code	Designation
J	10 no lockwire
K	10 with lockwire
L	12 no lockwire
M	12 with lockwire
N	14 no lockwire
P	14 with lockwire
R	16 no lockwire
T	16 with lockwire

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:29Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Referenced documents. This document references the following:

MIL-DTL-85800
SAE AS8879
SAE AS85720/1

Custodians:
Navy - AS
DLA - CC

Preparing activity:
Navy - AS
(Project 4720-2018-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:29Z
Check the source to verify that this is the current version before use.