INCH-POUND

MIL-DTL-85855A(AS)
25 October 1999
SUPERSEDING
MIL-V-85855(AS)
6 November 1989

DETAIL SPECIFICATION

VALVE, QUICK DISCONNECT, FOR THE PROTECTIVE ASSEMBLY, CHEMICAL, BIOLOGICAL, RADIOLOGICAL (CBR), A/P22P-9(V)

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for a quick disconnect valve for the protective assembly, chemical, biological, radiological (CBR), A/P22P-9(V).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Air Warfare Center Aircraft Division, Code 414100B120-3, Highway 547, Lakehurst, NJ 08733-5100, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4240
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-A-8625	-	Anodic Coatings for Aluminum and Aluminum Alloys.
MIL-N-18307	-	Nomenclature and Identification for Aeronautical Systems Including Joint Electronics Type Designated Systems and Associated Support Systems.

STANDARDS

FEDERAL

FED-STD-595	-	Colors used in Government Procurement.

DEPARTMENT OF DEFENSE

MIL-STD-100	-	Engineering Drawings.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-282	-	Filter Units, Protective Clothing, Gas-Mask Components and Related Products: Performance-Test Methods.
MIL-STD-810	-	Environmental Engineering Considerations and Laboratory Tests.
MIL-STD-889	-	Dissimilar Metals.

HANDBOOKS

MIL-HDBK-310	-	Global Climatic Data for Developing Military Products.
MIL-HDBK-505	-	Definitions of Item Levels, Item Exchangeability, Models, and Related Terms.
MIL-HDBK-695	-	Rubber Products: Recommended Shelf Life.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

2.2.2 Other Government documents. The following Government document forms a part of this document to the extent specified herein. Unless otherwise specified, the issue is that cited in the solicitation.

Army Field Manual FM 3-5	-	NBC Decontamination.

(Copies of Army Field Manual FM 3-5 are available from the Commander, US Army Publishing Agency, 2461 Eisenhower Avenue, Alexandria, VA 22331.)

2.3 Non-Government publication. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issue of the document which is DoD adopted is listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issue of the document not listed in the DoDISS is the issue of the document cited in the solicitation (see 6.2).

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE-AMS3238	-	Butyl (IIR) Rubber, Phosphate Ester Resistant, 65-75.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), samples shall be subjected to first article inspection in accordance with 4.2.

3.2 Materials. Materials shall be corrosion resistant or treated to resist corrosion due to fuels, salt spray, environmental, chemical, or biological warfare conditions.

3.2.1 Aluminum alloy. Aluminum alloy parts shall be anodically treated as specified in MIL-A-8625.

3.2.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals shall be as defined in MIL-STD-889.

3.2.3 Non-metallic materials. Rubber seals and O-rings shall meet the requirements specified in SAE-AMS3238 and the requirements specified herein (see 3.5.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

3.2.4 Fungus-proof materials. All materials shall not support fungoid growth.

3.2.5 Age. Elastomeric components shall have a shelf life of greater than 5 years in accordance with MIL-HDBK-695 when consistent with the properties required for functionality.

3.2.6 Toxic materials. The use of materials which produce toxic effects under any conditions shall not be used.

3.2.7 Flammable materials. The use of materials which will support combustion shall not be used.

3.3 Design and construction. The quick disconnect valve shall be designed and constructed as shown on figure 1. The valve shall form part of the A/P 22P-9(V) Protection Assembly as shown in figure 2. The valve shall be installed in-line between the mask and tactical ventilator to provide emergency egress and quick disconnection during ground operations and water landings. Design and construction shall permit decontamination of external surfaces without damage to or deterioration of the valve or its protective capability using materials and procedures of Army FM 3-5. The valve shall be compatible with oxygen and oxygen systems of Naval Air Systems Command and prevent ingress of all forms of contamination.

3.3.1 Storage life. The quick disconnect valve shall be designed to meet the performance requirements herein after five years storage under worldwide climatic conditions specified in MIL-HDBK-310.

3.3.2 Interchangeability. All parts, assemblies and subassemblies, having the same part number, shall be identical as specified in MIL-HDBK-505 and MIL-STD-100. When any unit or part is interchanged, the quick disconnect valve shall meet all performance requirements without adjustment or modification of any part or subassembly.

3.4 Hardware.

3.4.1 Fasteners. All fasteners, including bolts, screws, nut, rivets, and washers shall be selected from the fasteners listed in the Department of Defense Index of Specifications and Standards (DoDISS).

3.5 Performance.

3.5.1 Separation force. The valve shall withstand the separation force requirements in the unlocked and locked positions as follows.

3.5.1.1 Unlocked. The maximum axial force required to separate the quick disconnect valve at the quick disconnect fitting shall be not greater than five pounds (22.2 newtons) when tested as specified in 4.5.2.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

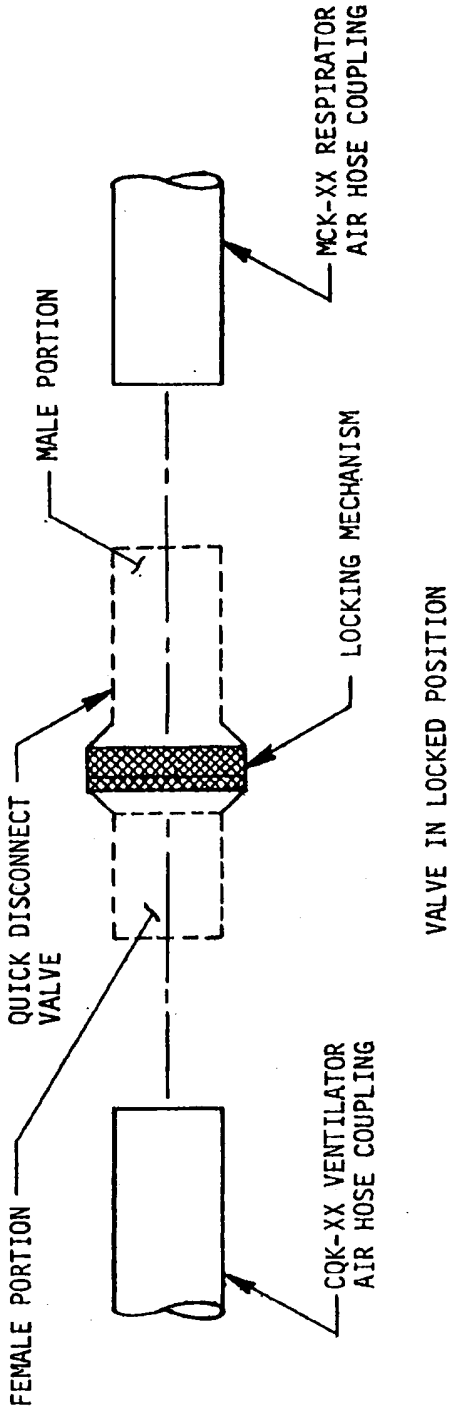


FIGURE 1. Quick disconnect valve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

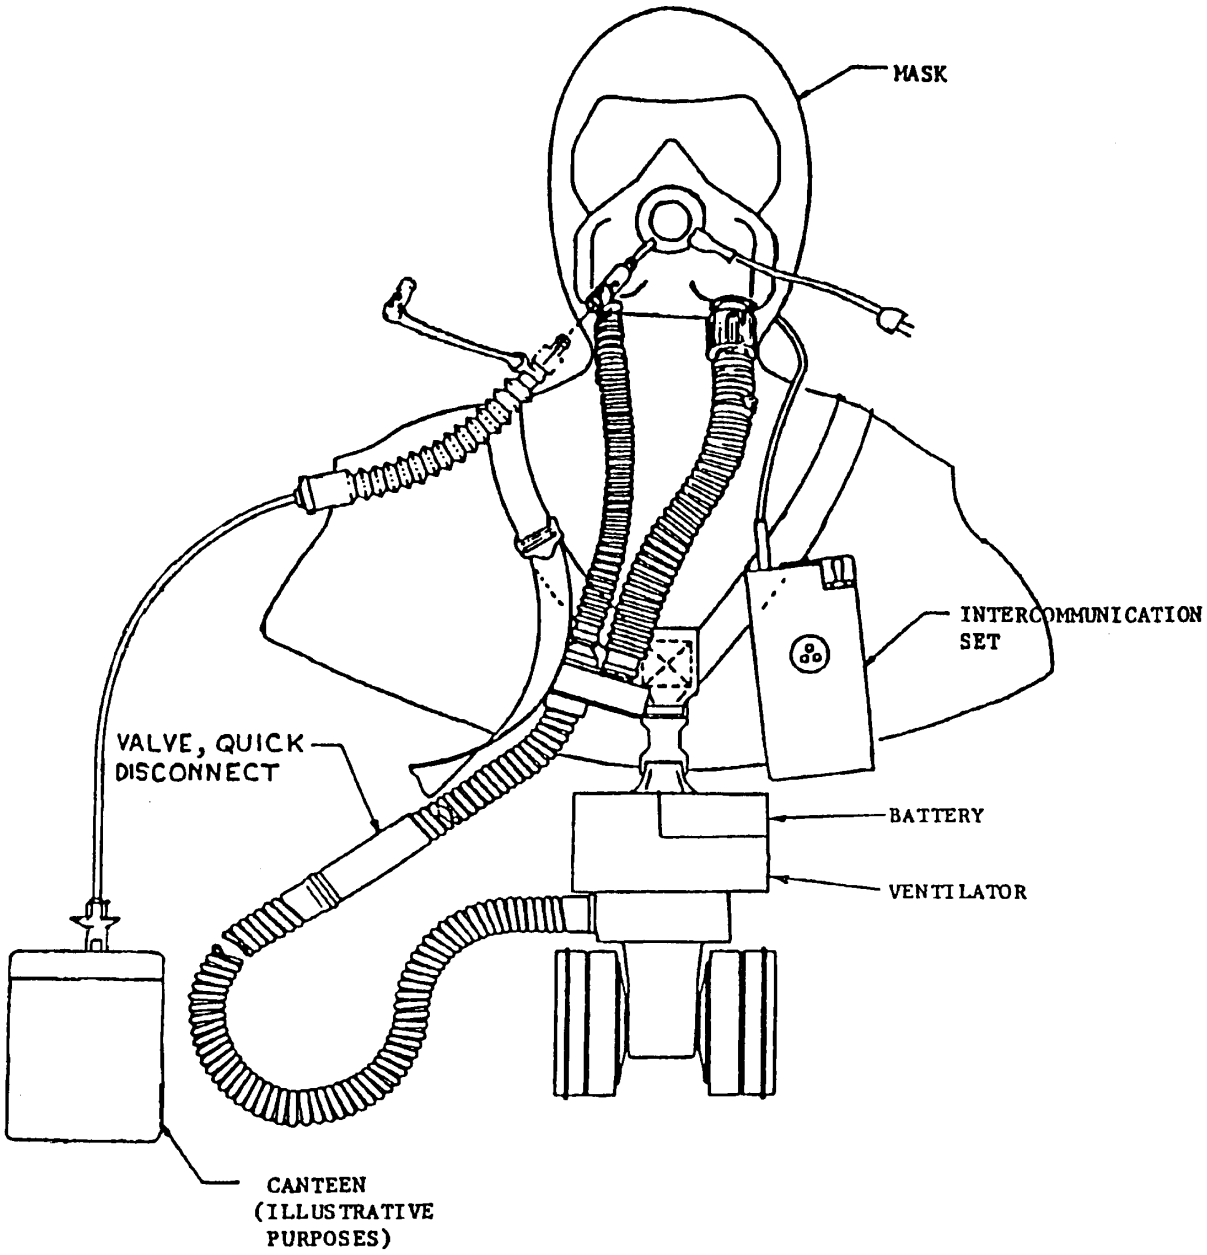


FIGURE 2. Protective assembly, CBR, helicopter aircrew member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

3.5.1.2 Locked. The quick disconnect valve shall not separate at the quick disconnect fitting while in the locked position under a minimum axial force of 100 pounds (440.0 newtons), when tested as specified in 4.5.2.1.2.

3.5.2 Self sealing valve. The force required to open the self-sealing valve, contained within the male portion of the quick disconnect valve, shall be not greater than four pounds (17.8 newtons) when tested as specified in 4.5.2.2.

3.5.3 Air leakage. The overall leakage rate of the quick disconnect valve shall be not greater than 0.006 cubic inch/min (0.10 cc/min) when tested for suction or pressure as specified in 4.5.2.3.1 and 4.5.2.3.2.

3.5.4 Pressure drop. The pressure drop through the quick disconnect valve shall be not greater than 0.5 inch water gauge (WG) when tested as specified in 4.5.2.4.

3.5.5 Water leakage. The self-sealing valve shall be water-tight (zero leakage) when tested as specified in 4.5.2.5.

3.5.6 Noise level. The noise level, measured with the quick disconnect valve connected to the CQK-2/P tactical ventilator delivery hose outlet, shall be not greater than the noise levels shown on figure 3 as determined by 1/3 octave band analysis over the frequency range 200-5000 Hz when tested as specified in 4.5.2.6.

3.5.7 Chemical agent penetration. The coupling seals and O-ring materials of the quick disconnect valve shall have an endpoint time of not less than 360 minutes when tested as specified in 4.5.2.7.1, 4.5.2.7.2, and 4.5.2.7.3.

3.5.8 Endurance. Prior to and upon completion of the endurance test of 4.5.3, the quick disconnect valve shall meet the requirements of 3.5.1, 3.5.2, 3.5.3, and 3.5.4 without failure after 500 cycles when tested as specified in 4.5.3.

3.5.9 Environmental. The quick disconnect valve shall meet the requirements of 3.5.1, 3.5.2, 3.5.3, 3.5.4, and 3.5.5 prior to and at the completion of each environmental test of 4.5.4.

3.5.9.1 High temperature. The quick disconnect valve shall operate without failure when tested as specified in 4.5.4.1.

3.5.9.2 Low temperature. The quick disconnect valve shall operate without failure when tested as specified in 4.5.4.2.

3.5.9.3 Salt fog. The quick disconnect valve shall withstand both the corrosive and physical effects of the salt fog environment and operate without failure when tested as specified in 4.5.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

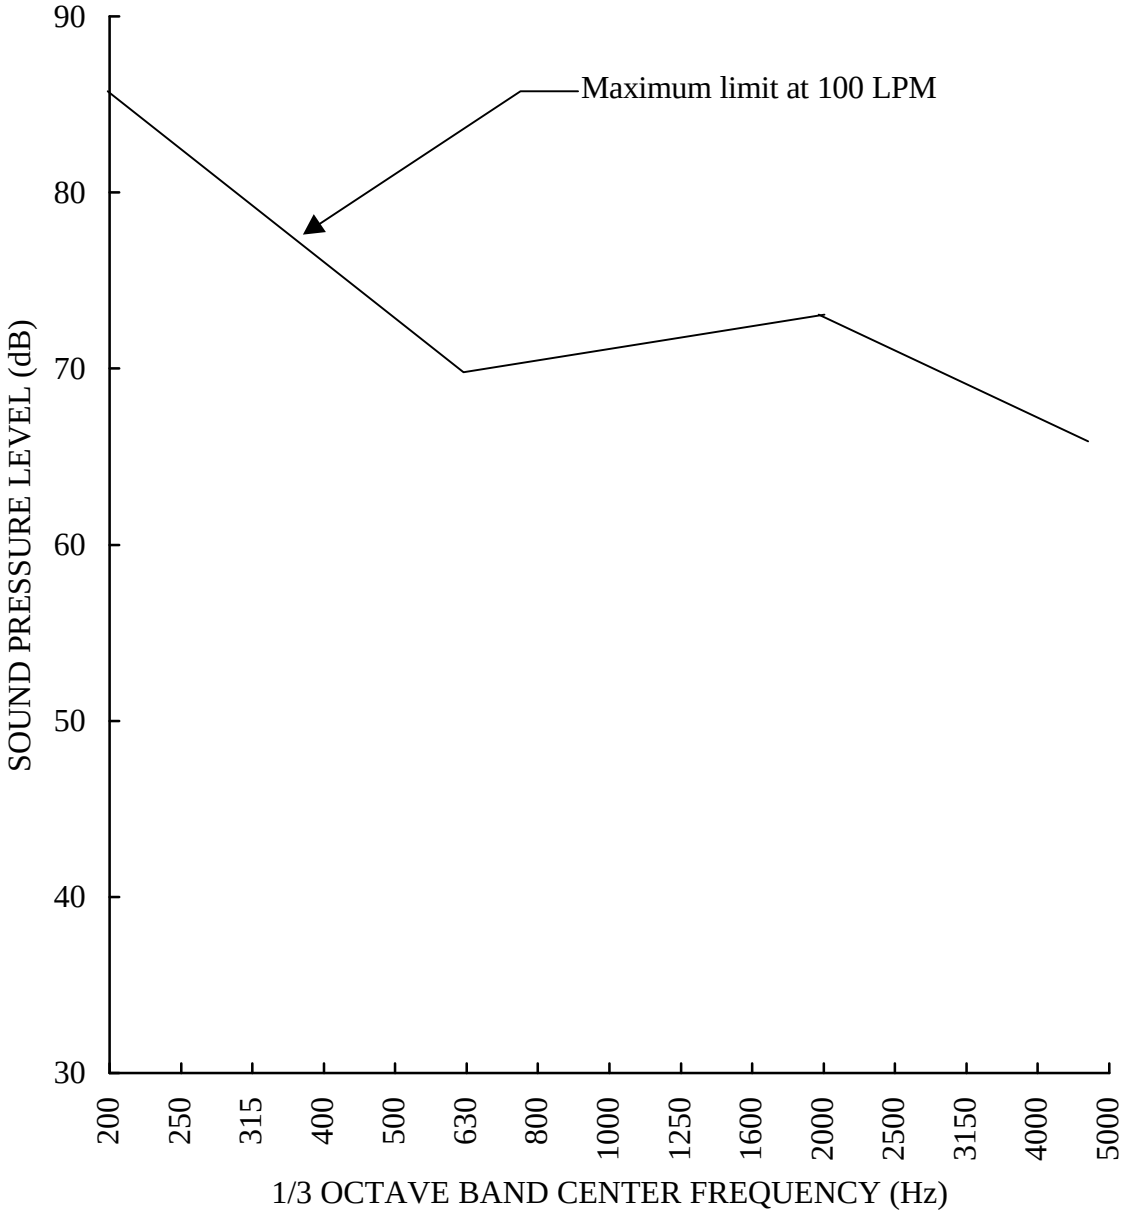


FIGURE 3. Noise levels at quick disconnect valve with 100 LPM air flow.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

3.5.9.4 Icing/freezing rain. The quick disconnect valve shall withstand the effects of icing produced by a freezing rain and shall operate without failure when tested as specified in 4.5.4.4.

3.5.9.5 Fungus. The quick disconnect valve shall not support fungal growth and shall operate without failure when tested as specified in 4.5.4.5.

3.5.9.6 Low pressure/high humidity. The quick disconnect valve shall operate without failure when tested as specified in 4.5.4.6.

3.5.9.7 Dust. The quick disconnect valve shall withstand the effects of blowing dust and shall operate without failure when tested as specified in 4.5.4.7.

3.5.9.8 Normal acceleration. The quick disconnect valve shall not inadvertently disconnect and shall operate without failure when tested as specified in 4.5.4.8.

3.5.9.9. High temperature/diurnal cycle/high humidity. The quick disconnect valve shall operate without failure when tested as specified in 4.5.4.9.

3.6 Component parts. The quick disconnect valve shall consist of a male portion and a female portion (see 3.6.1 and 3.6.2).

3.6.1 Male portion. The male portion (see figure 1) of the quick disconnect valve shall be attached to the air inlet hose of the MCK-3/P mask and shall contain a self-sealing valve which automatically closes when the two portions are separated. The self-sealing valve shall be able to be opened by a CBR protected, gloved hand when the quick disconnect is separated to allow air to flow freely into the mask.

3.6.2 Female portion. The female portion (see figure 1) of the quick disconnect valve shall be attached to the CQK-2/P tactical ventilator delivery hose and shall contain a single action one-hand operated, locking mechanism to prevent inadvertant disconnection and to allow for quick disconnection with one CBR protected gloved hand.

3.7 Dimensions. The overall length of the quick disconnect valve shall be not greater than five inches. The outside diameter shall be not greater than 1.5 inches.

3.8 Weight. The weight of the quick disconnect valve shall be not greater than eight ounces.

3.9 Color. The quick disconnect valve shall be black in color, approximately matching color number 37038 of FED-STD-595.

3.10 Nameplates and identification markings. Nameplate approval, equipment identification marking, and serial number assignment, shall be as specified in MIL-N-18307 and MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. The quick disconnect valve shall be free from contamination and imperfections such as dirt, grease, oil, foreign matter, malfunctioning of hardware and damage such as cracks, burrs, sharp edges, rough grinding marks, and uneven surfaces due to forming operations. Rubber parts shall be free of damage, cuts, and tears. Particular attention shall be given to accuracy of dimensions, fillet radii, marking of parts and assemblies, thoroughness of welding, brazing, painting, swaging, and soldering, alignment of parts, and tightness of assembly screws and bolts.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.2 First article inspection. First article inspection shall be performed on three quick disconnect valves when a first article sample is required (see 3.1). This inspection shall be completed in the order specified in table I.

4.3 Conformance inspection. Conformance inspection shall consist of all the examinations and tests specified in table II.

4.4 Test conditions.

4.4.1 Temperature and pressure. Inspections shall be conducted at local ambient temperature and barometric pressure. Corrections shall be made to provide agreement with the temperature and pressure calibration of the instruments. Inspection results provided by an instrument not calibrated to normal temperature and pressure (NTP) conditions shall be corrected to determine NTP conditions. NTP conditions are 70 °F and 29.92 inches Hg.

4.5 Inspection methods.

4.5.1 Examination. The valve shall undergo the following visual examinations.

4.5.1.1 Quick disconnect valve. Every quick disconnect valve selected as a sample unit from the lot (see 6.4.1) shall be examined for major and minor defects to determine conformance to this specification. The classification of defects, table III, shall be used to classify the defects found.

4.5.1.1.1 Dimensions and weight. Each quick disconnect valve selected as a sample unit from the lot shall be checked to determine conformance to the dimensions and weight specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection.

INSPECTION	REQUIREMENT	TEST METHOD	SAMPLE NUMBER		
			1	2	3
Visual	--	4.5.1	X	X	X
Separation force/unlocked	3.5.1.1	4.5.2.1.1	X	X	X
Separation force/locked	3.5.1.2	4.5.2.1.2	X	X	X
Self sealing valve	3.5.2	4.5.2.2	X	X	X
Air leakage	3.5.3	4.5.2.3	X	X	X
Pressure drop	3.5.4	4.5.2.4	X	X	X
Water leakage	3.5.5	4.5.2.5	X	X	X
Noise level	3.5.6	4.5.2.6	X		
Agent permeation/mustard	3.5.7	4.5.2.7.1		--	
Agent permeation/Vx	3.5.7	4.5.2.7.2		--	
Agent permeation/ thickened soman	3.5.7	4.5.2.7.3		--	
Endurance	3.5.8	4.5.3		X	
High temperature	3.5.9.1	4.5.4.1	See table IV		
Low temperature	3.5.9.2	4.5.4.2	See table IV		
Salt fog	3.5.9.3	4.5.4.3	See table IV		
Icing/freezing rain	3.5.9.4	4.5.4.4	See table IV		
Fungus	3.5.9.5	4.5.4.5	See table IV		
Low pressure/high humidity	3.5.9.6	4.5.4.6	See table IV		
Dust	3.5.9.7	4.5.4.7	See table IV		
Normal acceleration	3.5.9.8	4.5.4.8	See table IV		
High temperature/diurnal cycle/high humidity	3.5.9.9	4.5.4.9	See table IV		

TABLE II. Conformance inspection.

INSPECTION	METHOD
Examination	4.5.1
Air leakage	4.5.2.3
Pressure drop	4.5.2.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for visual examination of the quick disconnect valve.

MAJOR	MINOR
101. Weight exceeds requirements. 102. Dimensions – overall length not as specified, diameter exceeds maximum. 103. Material imperfections – foreign embedded. 104. Surfaces – uncleaned, rough, misaligned, or containing cracks, nicks, or other flows. 105. Any component missing, malformed, fractured, or otherwise damaged. 106. Incorrect assembling or improper positioning of components. 107. Any functioning part that works with difficulty. 108. Faulty workmanship	201. Color not as specified. 202. Marking incorrect, missing, insufficient, illegible, or not permanent.

4.5.2 Performance tests.

4.5.2.1 Separation force. The valve shall withstand the separation force tests in the unlocked and locked positions.

4.5.2.1.1 Unlocked. A separation force shall be applied to the quick disconnect valve with the locking mechanism moved to the unlocked position. The axial force required to separate the quick disconnect valve at the quick disconnect fitting shall meet the requirements of 3.5.1.1.

4.5.2.1.2 Locked. An axial force up to 100 pounds shall be applied to the quick disconnect valve with the locking mechanism moved to the locked position. The quick disconnect valve shall not separate at a lower force as specified in 3.5.1.2.

4.5.2.2 Self sealing valve. An opening force shall be applied to the self-sealing valve. The force required to open the valve shall meet the requirements of 3.5.2.

4.5.2.3 Air leakage.

4.5.2.3.1 Suction. With one end of the quick disconnect valve blanked, a suction of 15 inches WG shall be applied to the other end. The overall leakage rate shall be not greater than that specified in 3.5.3.

4.5.2.3.2 Pressure. With one end of the quick disconnect valve blanked, a pressure of 10 inches WG shall be applied to the other end. The overall leakage rate shall be not greater than that specified in 3.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

4.5.2.4 Pressure drop. An inlet pressure of 10 inches WG shall be applied to the quick disconnect valve. Flows shall be 0.9, 1.8, and 3.5 cubic feet per minute (cfm). The pressure drop through the quick disconnect valve shall be not greater than that specified in 3.5.4.

4.5.2.5 Water leakage. The self-sealing valve shall be tested for water leakage at a hydrostatic head of 20 feet WG. After a one minute exposure, the water leakage shall be measured and be as specified in 3.5.5.

4.5.2.6 Noise level. The noise level shall be measured with the quick disconnect valve connected to the CQK-2/P tactical ventilator with an air supply of 100 LPM flow. The noise level shall be measured at the outlet of the quick disconnect valve and shall be not greater than the limits specified in 3.5.6.

4.5.2.7 Chemical agent permeation. Rubber seals and O-rings from the quick disconnect valve shall be tested for chemical agent permeation. Test slabs made of the same formulation and thickness, and at the same cure time and cure temperature as the rubber seals and O-rings may be used in lieu of quick disconnect valve materials.

4.5.2.7.1 Mustard. Resistance to permeation by mustard shall be tested in accordance with MIL-STD-282, Methods T-204.1.2 and T-209.1. The material shall meet the requirements specified in 3.5.7.

4.5.2.7.2 Vx resistance. Resistance to permeation by Vx liquid shall be tested in accordance with MIL-STD-282, Method T-205. The material shall meet the requirements specified in 3.5.7

4.5.2.7.3 Thickened soman. Resistance to permeation by thickened soman shall be tested in accordance with MIL-STD-282, Methods T-206.1.3 and T-208.1. The material shall meet the requirements specified in 3.5.7.

4.5.3 Endurance. The quick disconnect valve shall be cycled 500 times. A cycle shall consist of separation of the quick disconnect valve at the quick disconnect fitting and reconnection at the quick disconnect fitting. At the conclusion of the 500 cycles, the quick disconnect valve shall meet the requirements specified in 3.5.8.

4.5.4 Environmental tests. Environmental tests shall be conducted in the sequence specified in table IV. Prior to and at the completion of each environmental test, the quick disconnect valve shall be tested as specified in 4.5.2.1, 4.5.2.2, 4.5.2.3, 4.5.2.4, 4.5.2.5, and shall meet the requirement of 3.5.9.

4.5.4.1 High temperature. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 501.3, Procedure II, Operation. The quick disconnect valve shall be placed in the climatic chamber. The chamber temperature shall be raised to 158 °F (70 °C) at a rate of 5.4 °F (3 °C) per minute. The chamber temperature shall be maintained at the specified level for a period of one hour. The quick disconnect valve shall then by cycled one time

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

(see 4.5.3). The relative humidity shall be not greater than 75 percent. The temperature shall then be reduced to 131 °F at a rate of 5 °F per minute and maintained at that temperature for a period of six hours. At the completion of the six hour period, the quick disconnect valve shall meet the requirements specified in 3.5.9 and 3.5.9.1.

4.5.4.2 Low temperature. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 502.3, Procedure II, Operation. The quick disconnect valve shall be placed in the climatic chamber. The chamber temperature shall be lowered to 0-40 °F (-40 °C) at a rate of 5 °F (3 °C) per minute. The chamber temperature shall be maintained at that temperature for a period of one hour. The quick disconnect valve shall then by cycled one time (see 4.5.3). The temperature shall then be brought to -14 °F at a rate of 5 °F per minute and maintained for a period of six hours. At the completion of the six hour period, the quick disconnect valve shall meet the requirements specified in 3.5.9 and 3.5.9.2.

4.5.4.3 Salt fog. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 509.3. The test shall consist of four alternating periods of 24 hours exposure. The quick disconnect valve shall meet the requirements specified in 3.5.9 and 3.5.9.3.

TABLE IV. Environmental first article test sequence quick disconnect valve.

TEST	UNIT NUMBER						
	1	2	3	4	5	6	7
Examination	X	X	X	X	X	X	X
Low pressure high humidity	X	X					
Low temperature	X	X					
High temperature	X	X					
Blowing dust	X	X					
Fungus			X	X			
Salt fog			X	X			
Acceleration					X	X	
High temp/diurnal/high humidity					X	X	
Icing and freezing rain							X

4.5.4.4 Icing/freezing rain. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 521.1, Procedure I, Glaze Ice, Sea Spray condition. The quick disconnect valve shall be cycled one time at 21 °F (-6 °C) (see 4.5.3). Ice may be broken to facilitate disconnection specified in 3.5.9 and 3.5.9.4.

4.5.4.5 Fungus. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 508.4 for a period of 28 days. The quick disconnect valve shall meet the requirements specified in 3.5.9 and 3.5.9.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

4.5.4.6 Low pressure/high humidity. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 500.3, Procedure II, Operation. The quick disconnect valve shall be placed in the climatic chamber. The chamber temperature shall be reduced to -14 °F at a rate not greater than 5 °F per minute and the condition maintained for a period of 30 minutes. The pressure in the chamber shall then be reduced 0.7 standard atmospheres over a period of 15 minutes and maintained at this pressure for 30 minutes. The chamber humidity shall then be raised and maintained at or close to saturation. The chamber temperature shall then be raised to 32 °F and the pressure increased to NTP at an approximately linear rate over a period of 15 minutes. The chamber temperature shall then be raised at an approximate linear rate of 86 °F with the humidity maintained at or near saturation over a period of 30 minutes. The chamber conditions shall be maintained for a period of not less than one hour and until all frost has melted. The quick disconnect valve shall meet the requirements specified in 3.5.9 and 3.5.9.6.

4.5.4.7 Dust. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 510.3, Procedure I, Blowing Dust for a period of six hours at 73 °F and 300 feet/minute (ft/min) air velocity and for a period of six hours at 131 °F and 1715 ft/min air velocity. Relative humidity shall be not greater than 30 percent. The quick disconnect valve shall meet the requirements specified in 3.5.9 and 3.5.9.7.

4.5.4.8 Normal acceleration. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 513.4, Procedure II, Operation. The acceleration shall be six g's for the test in each of six directions. The quick disconnect valve shall meet the requirements specified in 3.5.9 and 3.5.9.8.

4.5.4.9 High temperature/diurnal cycle/high humidity. The quick disconnect valve shall be tested as specified in MIL-STD-810, Method 507.3, Procedure II, Cycle 4, normal test duration. The quick disconnect valve shall be examined every five days and shall meet the requirements specified in 3.5.9 and 3.5.9.9.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The intended use for the quick disconnect valve is to facilitate quick disconnection of the mask from the ventilator in emergency situations. The quick disconnect valve is part of the military unique gas mask assembly, A/P 22P-9(V).

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2. and 2.3).

c. When first article is required (see 3.1).

d. Packaging requirements (see 5.1).

e. Applicable Government part number.

6.3 First article. Specific instructions in acquisition documents should be included regarding arrangements for examinations, approval of first article test results, and disposition of first article samples. Invitations for bids should state that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product, which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Definitions.

6.4.1 Inspection lot size. An inspection lot size is expressed in units of one quick disconnect valve made by one manufacturer under essentially the same conditions and from the same materials and components (see 4.5.1.1).

6.5 Subject term (key word) listing.

Agent protection
Agent resistant
Anti-drown
Decontamination

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Navy - AS

Preparing activity:
Navy - AS

(Project 4240-N250)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-85855A (AS)	**2. DOCUMENT DATE (YYYYMMDD)** 19991025

DOCUMENT TITLE VALVE, QUICK DISCONNECT, FOR THE PROTECTIVE ASSEMBLY, CHEMICAL, BIOLOGICAL, RADIOLOGICAL (CBR), A/P22P-9(V)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible.* ***Attach*** *extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN *(if applicable)*	**7.DATE SUBMITTED** (YYYYMMDD)

8. PREPARING ACTIVITY

a. NAME COMMANDER NAVAL AIR WARFARE CENTER AIRCRAFT DIVISION	b. TELEPHONE *Include Area Code)* (1) Commercial (732) 323-2947 (2) DSN 624-2947
c. ADDRESS *(Include Zip Code)* CODE 414100B120-3 HIGHWAY 547 LAKEHURST, NJ 08733-5100	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE STANDARDIZATION PROGRAM OFFICE (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:31Z
Check the source to verify that this is the current version before use.