MILITARY SPECIFICATION

FASTENER, ELECTRONIC EQUIPMENT, POSITIVE
SELF-LOCKING, FORCE LIMITING

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the fastener described herein shall consist of this document and the latest issue of the specification MIL-F-85731.

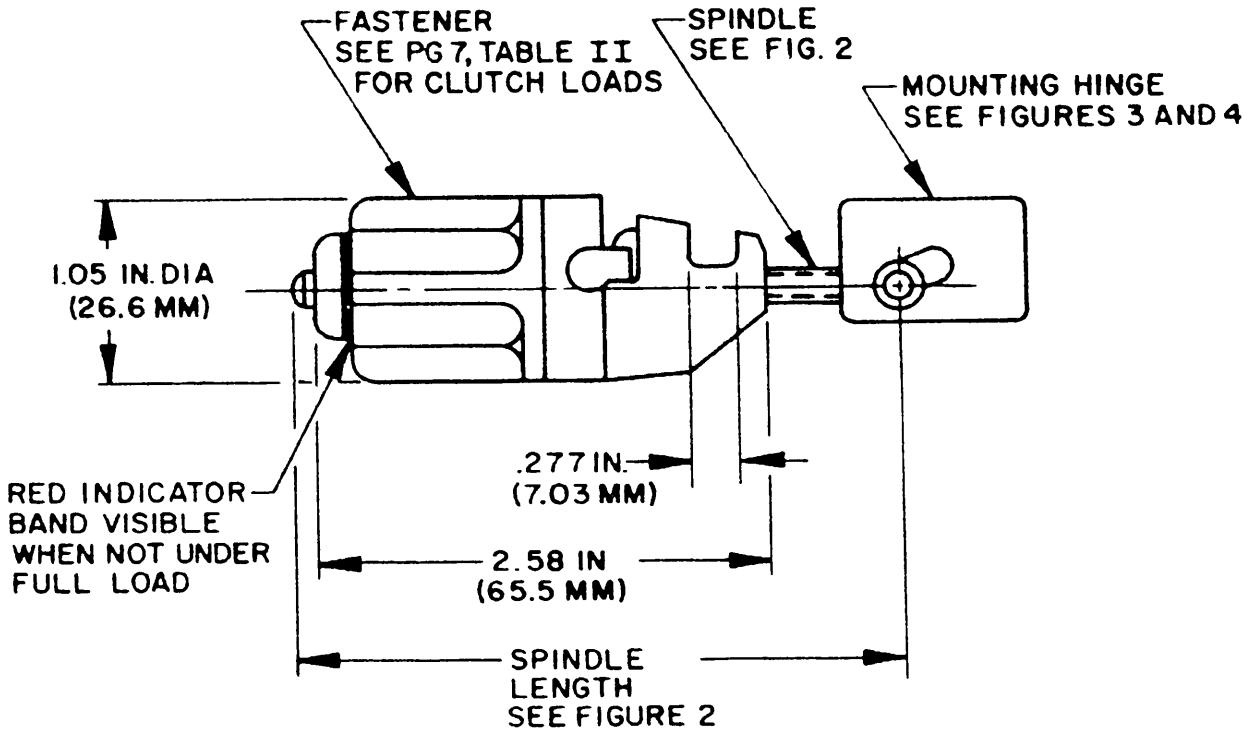


FIGURE 1. General configuration.

AMSC N/A

FSC 5340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:27Z
Check the source to verify that this is the current version before use.

NOTES

1 Dimensions are in inches, millimeters in parenthesis.
2. Tolerances are .XX ± .01(.3), .XXX (.12), ± 1/2°., unless otherwise specified.
3. Calculated weight is 22 lbs. (99.8 gr) varies with mounting hinge.
4 Meets all requirements of ARINC 404A

FIGURE 1. General configuration - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:27Z
Check the source to verify that this is the current version before use.

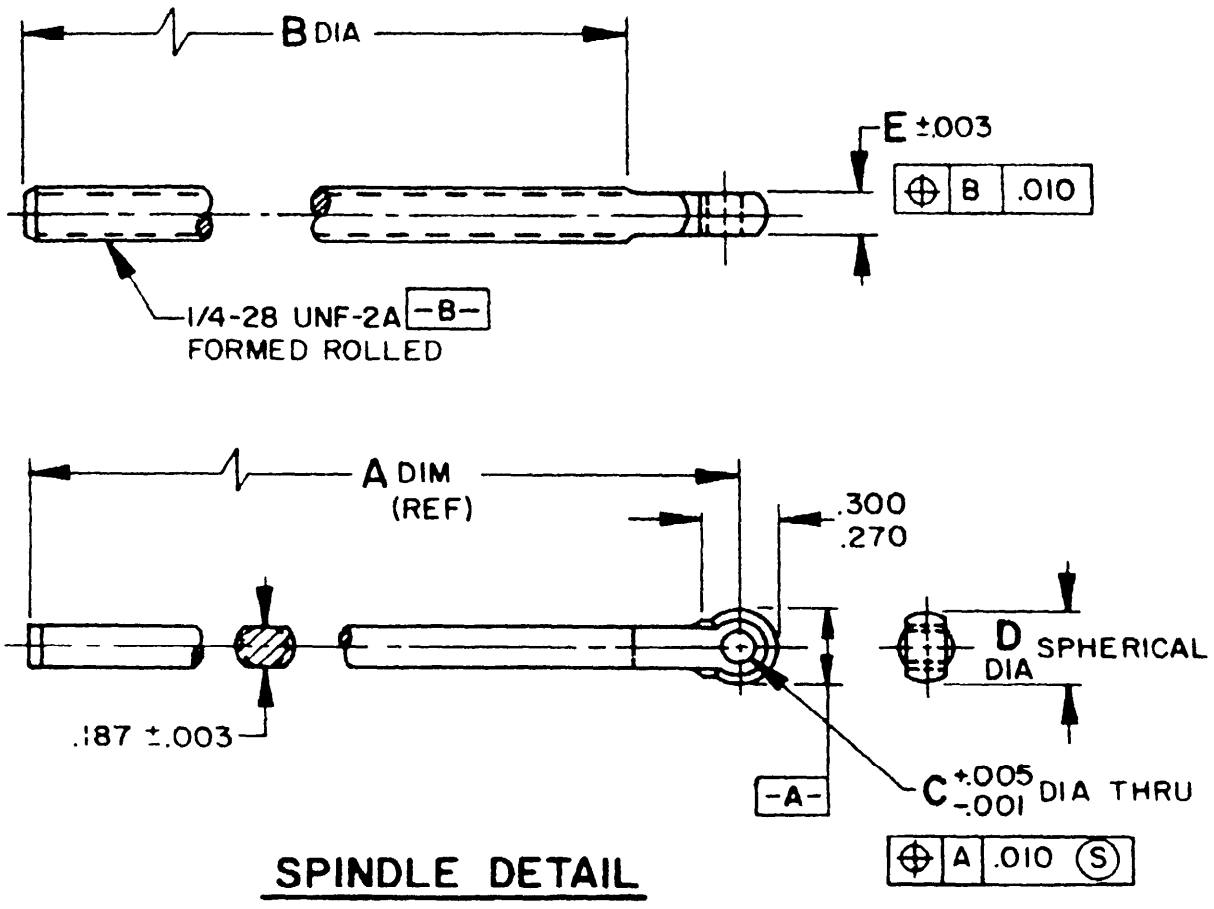


SPINDLE DETAIL

TABLE I. Spindle sizes and dimensions.


Size	A	B	C	D	E	Hinge Type
1	2.74	2.17	.129	.300	.187	C-D-E
2	2.99	2.42	.129	.300	.187	C-D-E
3	3.24	2.67	.129	.300	.187	ALL
4	2.74	2.17	.159	.328	.167	C-D-E
5	2.99	2.42	.159	.328	.167	C-D-E
6	3.24	2.67	.159	.328	.167	ALL
7	3.24	2.67	.159	.328	.167	ALL
8	3.60	3.03	.159	.328	.167	ALL

FIGURE 2. Spindle sizes 1 through 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:27Z
Check the source to verify that this is the current version before use.

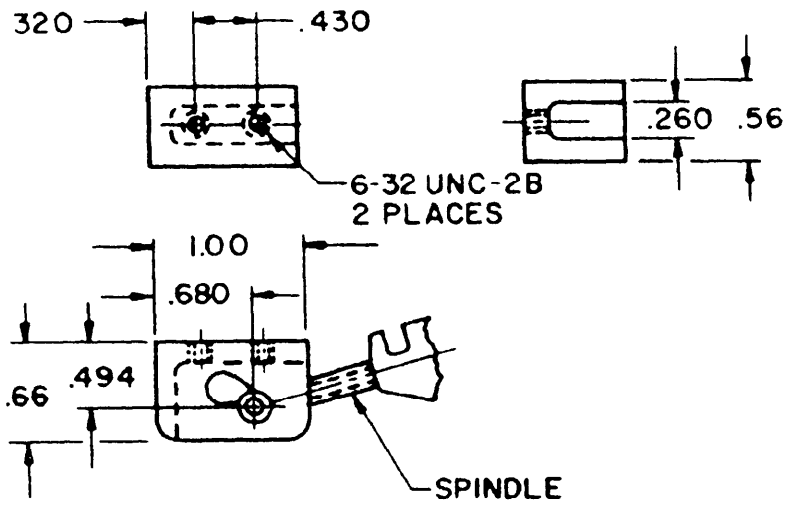


TYPE A

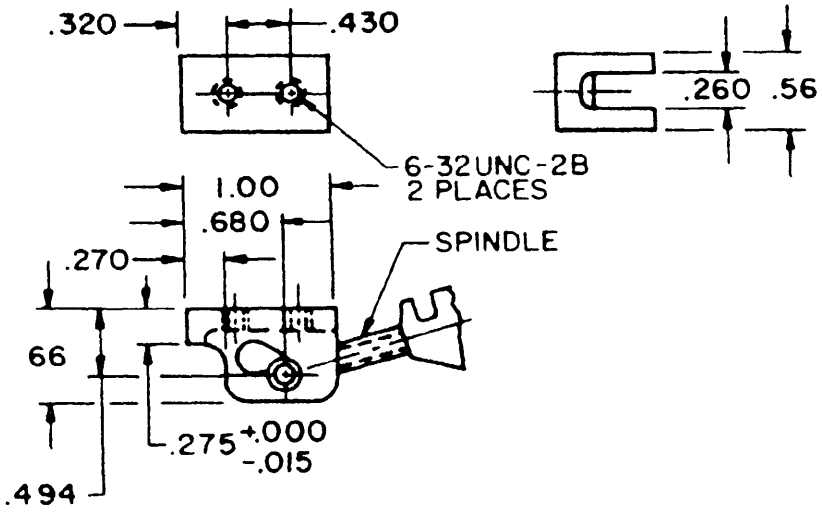


TYPE B

FIGURE 3. Mounting hinge types A and B.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:27Z
Check the source to verify that this is the current version before use.

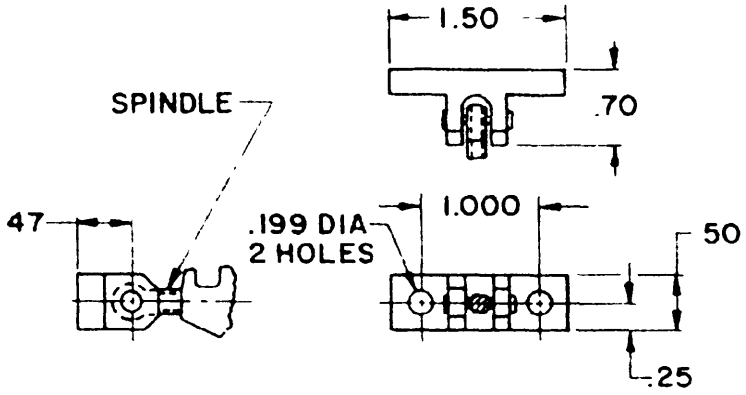

TYPE C

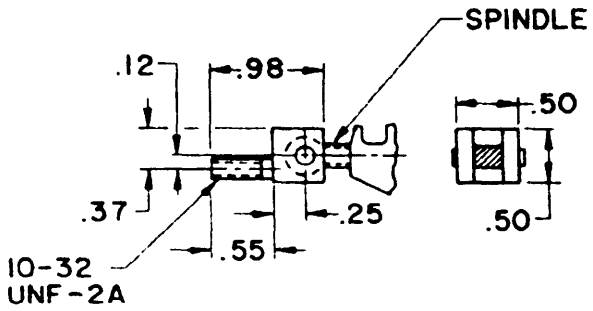

TYPE D

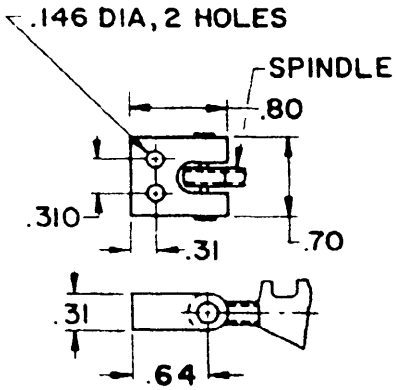

TYPE E

FIGURE 4. Mounting hinges types C, D and E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:27Z
Check the source to verify that this is the current version before use.

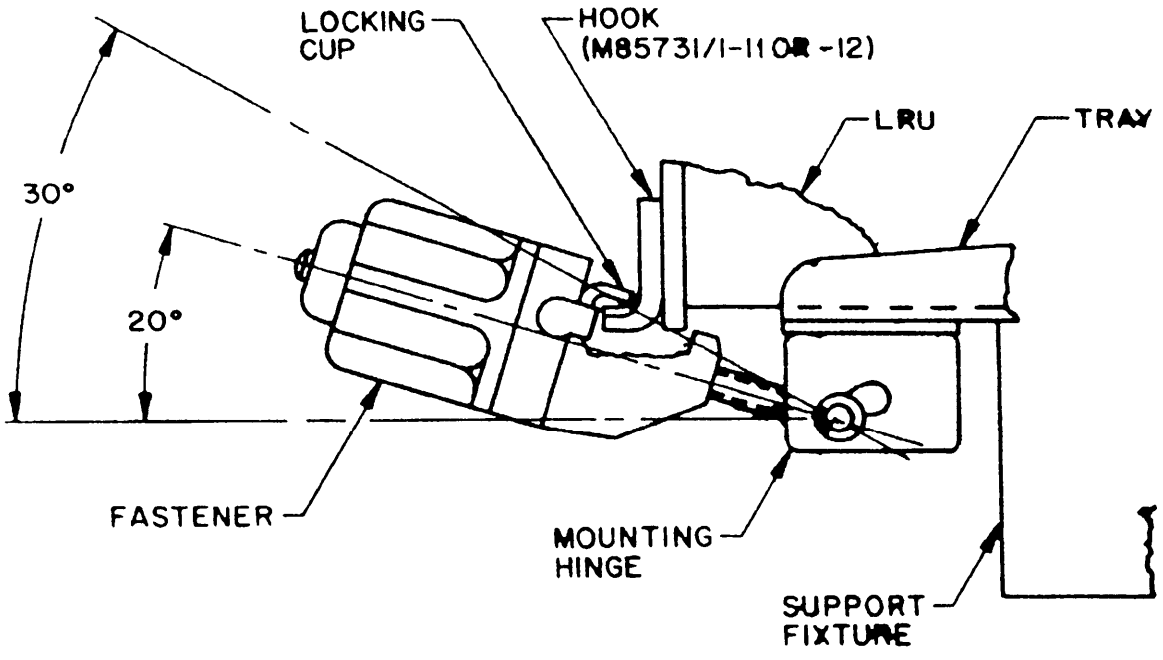


FIGURE 5 Fastener test fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:27Z
Check the source to verify that this is the current version before use.

TABLE II. Dash numbers and descriptive information.

Dash Number	Clutch Load (LBS)	Spindle Size	Mounting Hinge Type
01	50	1	D
-02	50	2	D
-03	50	3	D
-04	50	1	E
-05	50	2	E
-06	50	3	E
-07	75	1	D
-08	75	2	D
-09	75	3	D
-10	75	1	E
-11	75	2	E
-12	75	3	E
-13	100	1	D
-14	100	2	D
-15	100	3	D
-16	100	1	E
-17	100	2	E
-18	100	3	E
-19	150	6	A
-20	150	7	A
-21	150	8	A
-22	150	6	B
-23	150	7	B
-24	150	8	B
-25	150	4	C
-26	150	5	C
-27	150	6	C
-28	150	7	C
-29	150	8	C
-30	200	6	A
-31	200	7	A
-32	200	8	A
-33	200	6	B
-34	200	7	B
-35	200	8	B
-36	200	4	C
-37	200	5	C
-38	200	6	C
-39	200	7	C
-40	200	8	C

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Meets all requirements specified on MIL-F-85731 Fastener, Positive Locking, Electronic Equipment, General Specification For

Materials:

Fastener:	Outer Shells 360 or 380 Aluminum Alloy Die Cast or 303 CRES per QQ-S-763
Spindle:	Size 1, 2, 3, 4, 5, 6 and 8; 303 CRES per QQ-S-763 Size 7 Stainless Steel
Hinge:	Type A; 2024 Aluminum Alloy per QQ-A-225/6 Type B, C, D and E, 6061-T4 Aluminum Alloy per QQ-A-250/11

Finish:

Fastener:	Anodize per MIL-A-8625, Type II, Class 2 or Passivate per QQ-P-35
Spindle:	Passivate per QQ-P-35
Hinge:	Type A, B, C and E; Anodize per MIL-A-8625, Type II Class 2 Type D; Passivate per QQ-P-35

Preparing Activity:
Navy - AS
(Project No. 5340-1641)

Custodians
Army - ER
Navy - AS
AF - 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:27Z
Check the source to verify that this is the current version before use.