
MILITARY SPECIFICATION SHEET

SPLICE, FIBER OPTIC CABLE, FIBER SPLICE ENCLOSURE (METRIC)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring fiber optic splices described herein shall consist of this specification sheet and the latest issue of DOD-S-24623.

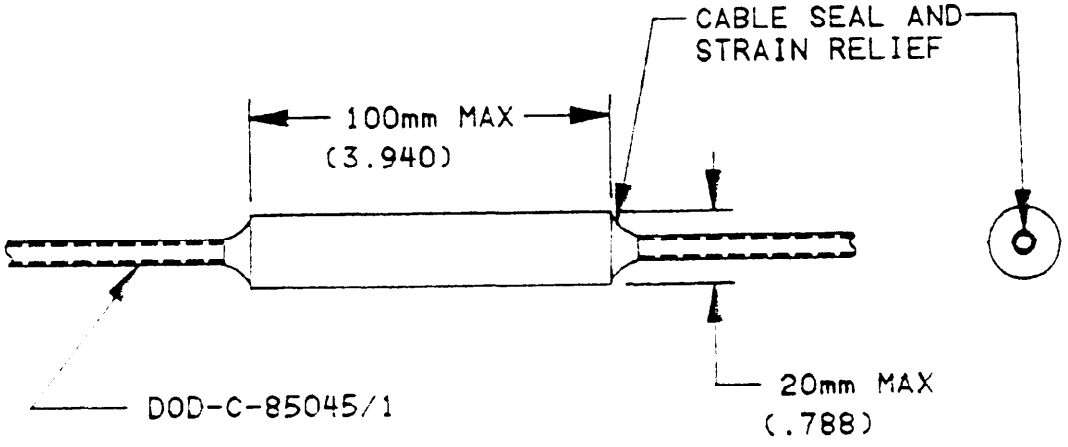

NOTES:
1. Dimensions are in millimeters.
2. Inch dimensions are in parentheses.
3. Inch dimensions are for general information only.

FIGURE 1. Cable splice construction envelope.

FSC 6060

Source: https://assist.dla.mil -- Downloaded: 20261O-19T23:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Mass: Total ≤ 2 kg.

Color: Gray or black.

Material: W-T-775 or ASTM B 75-68 or QQ-C-502 or QQ-C-576.

Safety labeling: Not applicable.

Sample requirements: Applicable.

Optical performance: Applicable.

Center wavelength: 850 nm.

Minimum crush load: 2,000 newtons.

Engineering information: This cable splice is suitable for use with cable DOD-C-85045/1 and with fiber splice DOD-24623/1.

Nuclear radiation exposure: None.

Part number	Item
D24623/2-01	Splice enclosure (contains part numbers D24623/1-1 and DS24623/1-2)

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Army - MI
Navy - AS, EC
Air Force - 11, 17, 19, 80, 99
DLA - ES

User activities:
Army - AR
Navy - OS, MC

Agent:
DLA - ES

Preparing activity:
Navy - SH

(Project 6060-0020-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:26Z
Check the source to verify that this is the current version before use.