
MILITARY SPECIFICATION SHEET

SPLICE, FIBER OPTIC, CABLE/FIBER

This specification is approved for use within the Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fiber optic splices described herein shall consist of this specification and the latest issue of DOD-S-24623.

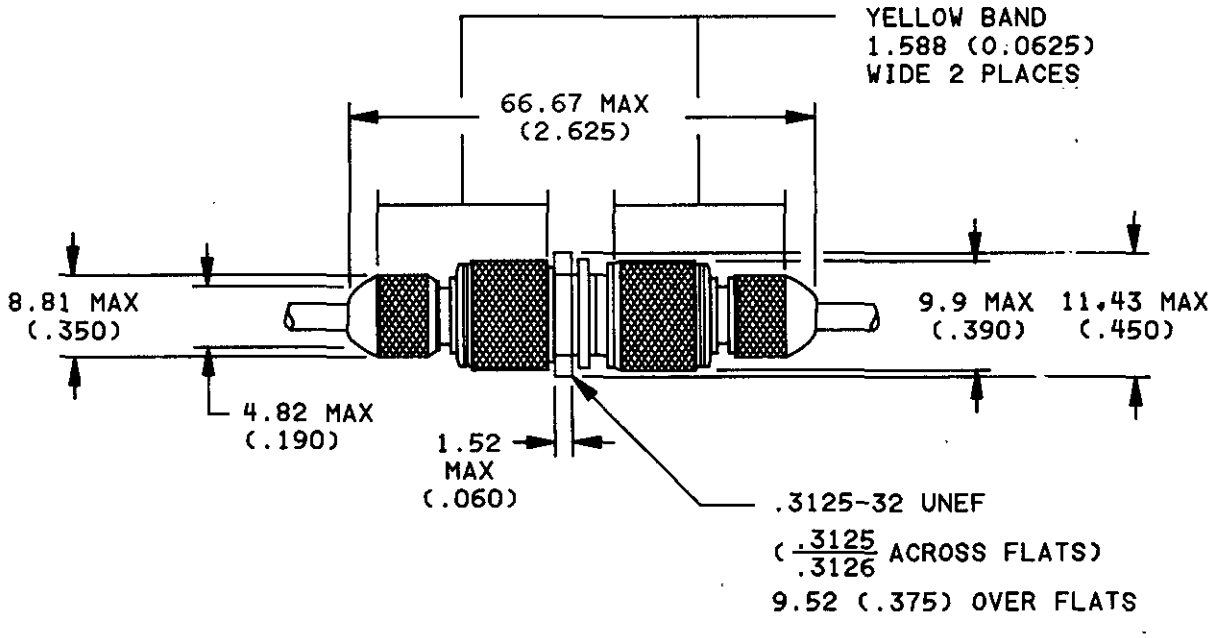

NOTES:
1. Dimensions are in millimeters.
2. Inch dimensions are in parentheses.
3. Inch dimensions are for general information only.

FIGURE 1. Cable/fiber splice construction.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T23:26Z
Check this source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REQUIREMENTS:

Mass: 20 grams maximum.

Color: Natural.

Materials:

Aluminum: QQ-A-225/6D (2024) or QQ-A-581.

Stainless steel: QQ-S-763, class 303.

Neoprene silicon rubber: ZZ-R-765.

Polyurethane: PC-95.

Safety labeling: Yellow band.

Sample requirements: See DOD-S-24623.

Optical performance: 0.1 to 0.5 dB (at 850 nm and 1300 nm).

Minimum crush load: 2,000 newtons.

Crosstalk: Not applicable.

Nuclear radiation exposure: None.

Operating temperature range: -46°C +71°C.

Storage temperature range: -55°C +85°C.

Part number:

Part number	Item	Fiber
D24623/3-01	Fiber optic cable/fiber splice, stainless steel	50/125, 100/140
D24623/3-02	Fiber optic cable/fiber splice, aluminum	50/125, 100/140

Engineering information: This fiber splice is required to be used with fiber as specified in DOD-C-85045/1. This cable splice is required to be used with cable as specified in DOD-C-85045.

Associated tools:

Fiber cleaver: MIL-T-83523.

Mechanical fiber stripper: MIL-T-83523.

Custodian:
Navy - SH

Review activities:
Navy - AS, EC

User activities:
Navy - CG, MC

Preparing activity:
Navy - SH

Agent:
DLA - ES

(Project 6060-N021)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:26Z
Check the source to verify that this is the current version before use.