METRIC
MIL-PRF-24623/6A
w/AMENDMENT 1
30 March 2021
SUPERSEDING
MIL-PRF-24623/6A
16 January 2009


PERFORMANCE SPECIFICATION SHEET

SPLICE, FUSION, FIBER OPTIC, PROTECTOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-24623.

SCOPE: The performance requirements specified herein cover fusion splice protectors suitable for military use with multi-mode or single-mode optical fibers.

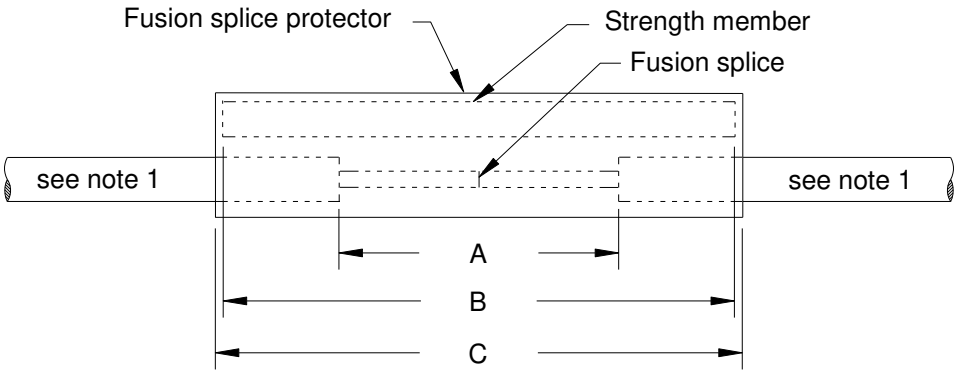

Designator	Description	Dimensions 2/			
		Maximum		Minimum	
		mm	inches	mm	inches
A 3/	Optical fiber splice length	24	0.945	--	--
B	Strength member length	39.9	1.571	39.3	1.547
C	Fusion splice protector length	40.5	1.594	39.5	1.555

NOTES:

1/ Applicable fiber types include M49291/6 and M49291/7.

2/ Inch equivalents may contain rounding errors and are given for reference purposes only.

3/ Minimum optical fiber splice length is preferred.

4/ Strength member must be burr free. Slight radius on end of strength member is preferred.

FIGURE 1. Fusion splice protector.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:27Z
Check the source to verify that this is the current version before use.

Part or identifying number (PIN): See sample below and table I.

M	**24623**	/	**6**	**X**
Military designator	Basic specification		Specification sheet	PIN code (see table I)

TABLE I. PIN numbers.

PIN code	Description	Dimensions – mm (inches)	Figure
1	Fusion splice protector	Length: 40 (1.575) OD: 2.90 (0.114)	1

REQUIREMENTS:

Design and construction: The fusion splice protector shall be of the construction, weight, and physical dimensions specified herein (see figure 1).

Strength member: The strength member shall be as specified herein (see figure 1).

Fiber splice protector: The fiber splice protector shall restore the environmental and mechanical integrity of the coating or buffer of the optical fiber with no impact to optical performance.

Protection device:

Installed outer diameter: Maximum: 3.10 millimeters (0.122 inch), Minimum: 2.70 millimeters (0.106 inch)

Installed length (figure 1, designator C): Maximum: 40.5 millimeters (1.594 inches), Minimum: 38.7 millimeters (1.524 inches)

Tooling: The tooling used to manufacture splices to this specification shall meet the requirements of A-A-59799 for optical fiber fusion splicer and cleaver.

Size: The dimensions of the splice parts shall be as shown on figure 1 and specified herein.

Weight: The weight of the splice parts shall be 0.850 gram (0.03 ounce) maximum.

Color: Splice protection devices requiring a heat shrink process shall allow for visual inspection of defects that may have occurred during the shrinking process.

Identification marking: Applicable.

JAN and J marking: Not applicable.

Cable seal flexing: Not applicable.

Twist: Not applicable.

Axial compressive loading: Not applicable.

Crush: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:27Z
Check the source to verify that this is the current version before use.

Vibration: Applicable with the following modification. Completed fusion splices, with fusion splice protectors installed, shall be vibration tested when installed in tray and tray holders qualified to MIL-DTL-24728/8 and shall be tested in accordance with the type I vibration test of MIL-STD-167-1.

Mechanical shock: Applicable with the following modification. Completed fusion splices, with fusion splice protectors installed, shall be shock tested when installed in tray and tray holders qualified to MIL-DTL-24728/8.

Dynamic strength: The dynamic strength of the splice, with the fusion splice protector installed, shall be tested in accordance with TIA-455-28 by applying an axial tensile load (see table II) between the two fused fibers until failure. The change in optical transmittance shall be monitored during the dynamic strength test. The load at optical failure shall not be less than 8.9 N (2.0 pounds).

TABLE II. Dynamic strength test load.

Configuration	Figure	Force (N/lb)
Protected	1	8.9/2.0

Fiber pull out force: Not applicable.

Cable pull out force: Not applicable.

Insertion loss: Applicable with the following modification. The insertion loss for splices shall not exceed 0.2 decibel. The insertion loss shall not exceed 0.5 decibel at any time during any testing of the splice.

Return loss: Applicable with the following modification. Return loss shall be greater than or equal to 58 decibels for single-mode.

Crosstalk: Not applicable.

Environmental:

Operating temperature: -28 to +65 °C (-18.4 to +149 °F)

Non-operating temperature: -40 to +70 °C (-40 to +158 °F)

Storage temperature: -40 to +70 °C (-40 to +158 °F)

Thermal shock: Applicable with the following modification. The storage temperature range shall be as specified herein.

Temperature/humidity cycling: Applicable with the following modification. During and after the temperature/humidity cycling test, the splice shall meet the requirements of the change in optical transmittance. A post test visual examination of the test specimens shall reveal no leakage of waterproofing compounds or other apparent loss of sealing capability, no surface or identification marking impairment, nor any damage detrimental to the operation of the test specimens.

Water pressure: Not applicable.

Freezing water immersion: Not applicable.

Nuclear radiation resistance: Not applicable.

Fluid immersion: Not applicable.

Flammability: Not applicable.

Temperature cycling: Applicable with the following modification. A post test visual examination of the test

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:27Z
Check the source to verify that this is the current version before use.

specimens shall reveal no leakage of waterproofing compounds or other apparent loss of sealing capability, no surface or identification marking impairment, nor any damage detrimental to the operation of the test specimens. The operating temperature range shall be as specified herein.

TABLE III. Temperature cycling steps. DELETED

Life aging: Applicable.

VERIFICATION PROGRAM: The verification system procedures, planning and all other documentation and data that comprise the verification system must be available to the Government for review. The Government may perform any necessary inspections, verifications and evaluations to ascertain conformance to the requirements and adequacy of the implementing procedures.

QUALIFICATION: With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL No. 24623 whether or not such products have actually been solicited by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from the Defense Supply Center Columbus, DSCC-VQ, 3990 East Broad Street, Columbus, OH 43218-3990, or by e-mail to vqp.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil

Qualification Retention: As long as the material supplied is identical in every respect to the qualification sample tested and is found satisfactory, then the period for Group C inspections for qualification retention is to be every 5 years.

Intended use: The splice and fusion splice protector are intended for use in all applications inside protective enclosures utilizing splice trays and splice tray holders in accordance with MIL-DTL-24728.

Referenced documents: In addition to MIL-PRF-24623, this specification sheet references the following documents:

A-A-59799

MIL-DTL-24728/8

MIL-STD-167-1

DELETED

DELETED

TIA-455-28

AMENDMENT NOTATIONS: The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:27Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 85
DLA – CC
NASA – NA

Review Activities:
Army – AR, MI
Navy – AS, CG, EC, MC
Air Force – 19, 93

Preparing Activity:
Navy – SH
(Project 6060-2020-009)

Agent:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:27Z
Check the source to verify that this is the current version before use.