MILITARY SPECIFICATION SHEET

PENETRATORS, HULL, CONNECTORIZED, CONNECTORS, PRESSURE-PROOF, FIBER OPTIC, SUBMARINE PLUG CONNECTOR, 32 CHANNEL, TYPE 1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the molded plug described herein shall consist of this specification sheet and the latest issue of DOD-P-24628(SH).


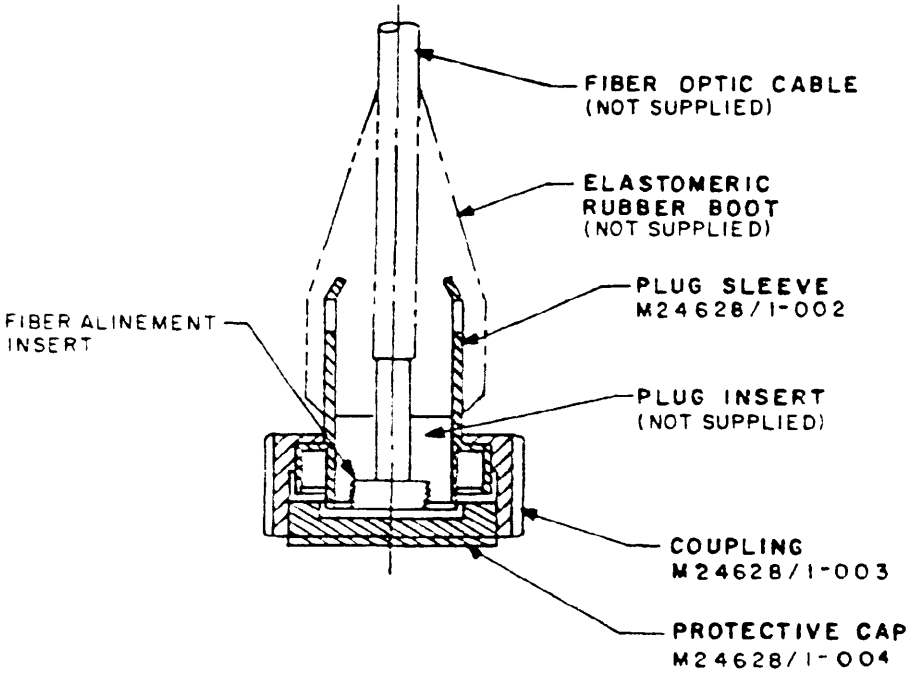


FIGURE 1. Hull penatrator assembly M24628/1-001.

FSC 6060

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:30Z
Check the source to verify that this is the current version before use.

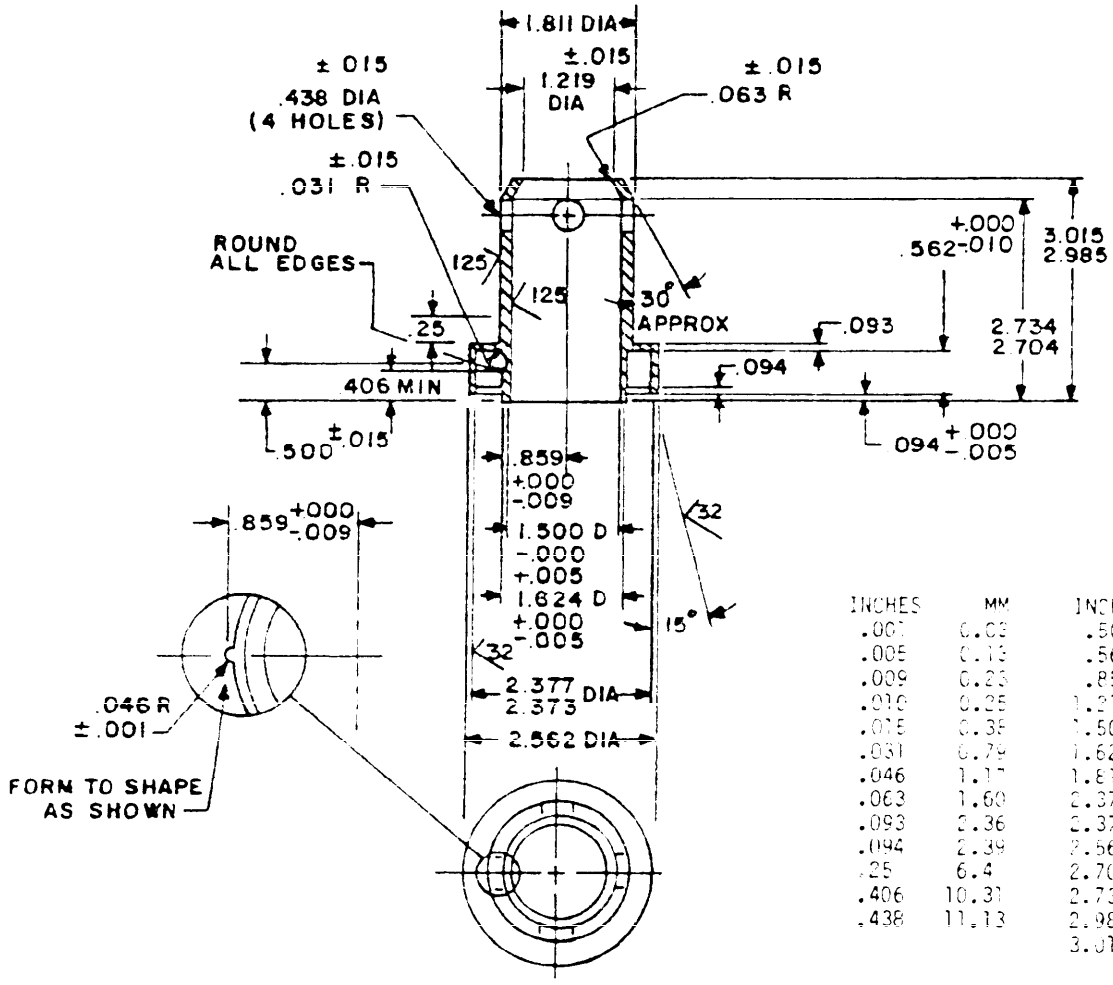


INCHES	MM	INCHES	MM
.001	0.03	.500	12.70
.005	0.13	.562	14.27
.009	0.23	.859	21.82
.010	0.25	1.219	30.96
.015	0.38	1.500	38.10
.031	0.79	1.624	41.25
.046	1.17	1.811	46.00
.063	1.60	2.373	60.27
.093	2.36	2.377	60.38
.094	2.39	2.562	65.07
.25	6.4	2.704	68.68
.406	10.31	2.734	69.44
.438	11.13	2.985	75.82
		3.015	76.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals, ±.02 (0.51 mm) for two place decimals, and ±0°30' for degrees.

FIGURE 2. Plug, sleeve M24628/1-002.


Source: https://assist.dla.mil -- Downloaded: 202610-19T23:30Z
Check the source to verify that this is the current version before use.

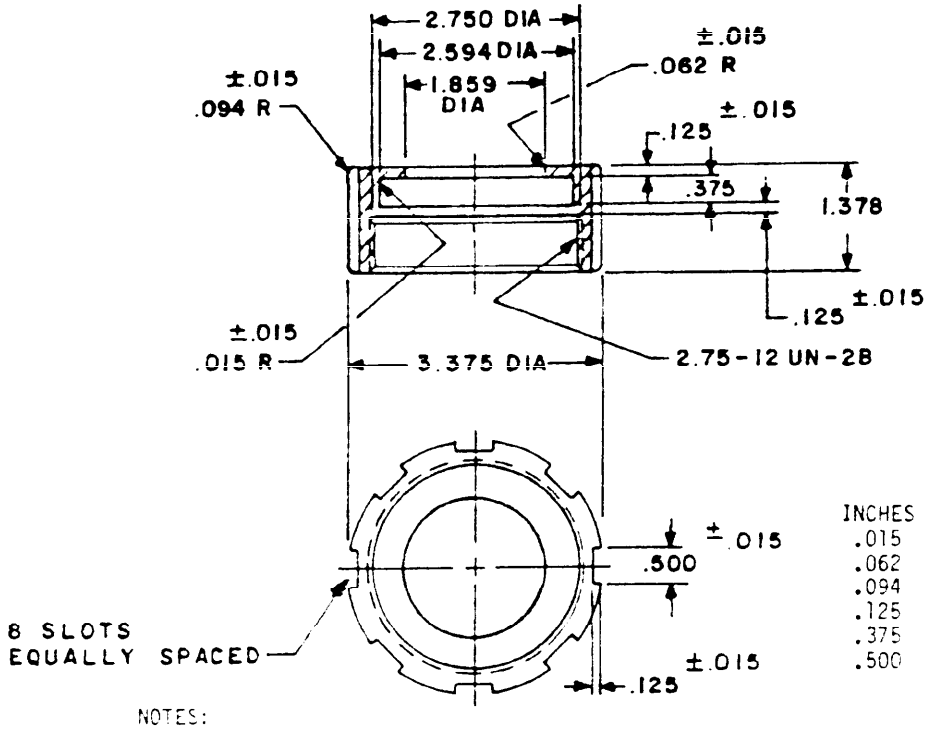

INCHES	MM	INCHES	MM
.015	0.38	1.378	35.00
.062	1.57	1.859	47.22
.094	2.39	2.594	65.89
.125	3.18	2.750	69.85
.375	9.53	3.375	85.73
.500	12.70		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals ±.02 (0.51 mm) for two place decimals, and ±0°30' for degrees.

FIGURE 3. Coupling M24628/1-003.

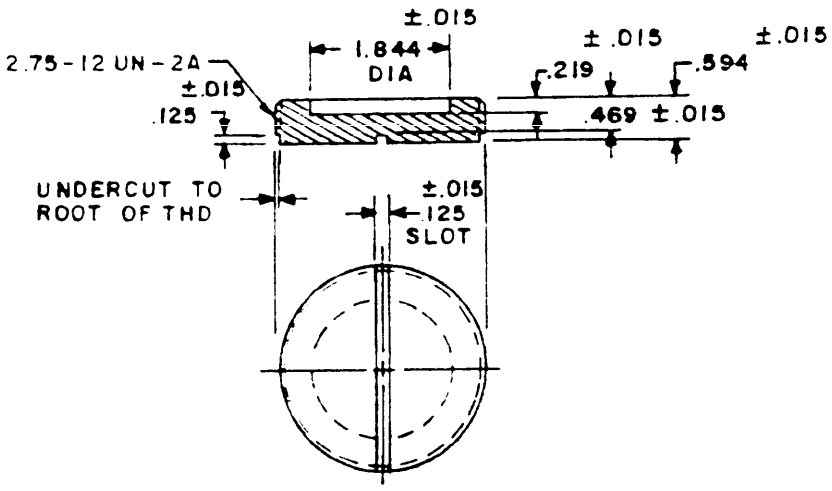

INCHES	MM
.015	0.38
.125	3.18
.219	5.56
.469	11.91
.594	15.09
1.844	46.84
2.750	69.85

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals, ±.02 (0.51 mm) for two place decimals, and ±0°30' for degrees.

FIGURE 4. Protective cap M24628/1-004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:30Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - SH

Review activities:
Navy - AS, EC
DLA - ES

User activity:
Navy - CG, MC

Agent:
DLA - ES

Preparing activity:
Navy - SH

(Project 6060-N011-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:30Z
Check the source to verify that this is the current version before use.