MIL-C-43082E
31 December 1984
SUPERSEDING
MIL-C-43082D
7 October 1976

MILITARY SPECIFICATION

COVERALL, ROCKET FUEL HANDLER'S: IMPERMEABLE, LIMITED PROTECTION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a one-piece coverall for limited protection against fuels and oxidizers.

1.2 Classification. The coveralls shall be one type in two sizes, as specified (see 6.2).

Schedule of sizes

Medium	Large

2. APPLICABLE DOCUMENTS

* 2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research and Development Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

UU-P-268	-	Paper, Kraft, Wrapping
O-C-105	-	Calcium Chloride, Dihydrate and Calcium Chloride, Anhydrous; Technical
V-T-276	-	Thread, Cotton
JJ-W-155	-	Webbing, Textile, (Cotton, Elastic)
UU-P-328	-	Paper, Manifold
DDD-L-20	-	Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-T-5624	-	Turbine Fuel, Aviation, Grades JP-4 and JP-5
MIL-P-7254	-	Propellants, Nitric Acid
MIL-F-10884	-	Fasteners, Snap
MIL-C-43062	-	Cloth, Coated, Nylon, Resin Modified, Butyl-Coated, Acid and Fuel Resistant
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural or in Colors
MIL-P-51493	-	Paper, Chemical Agents Detector; M-9

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-406	-	Plastics: Methods of Testing
FED-STD-601	-	Rubber: Sampling and Testing
FED-STD-751	-	Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

DRAWINGS

U.S. ARMY NATICK RESEARCH AND DEVELOPMENT CENTER

8-1-3 - Jig, Acid Testing, No. 2
2-1-474 - Coverall, Rocket Fuel Handler's, Impermeable Limited Protection; Method of Folding and Positioning

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample in which case this document shall govern.

3.1.2 First article. When specified a sample shall be subjected to first article inspection and approval (see 4.3, 6.2, and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

3.2 Materials.

* 3.2.1 Basic material. The basic material shall be unvulcanized, resin-modified butyl coated nylon, acid and fuel resistant, conforming to MIL-C-43062.

3.2.2 Unsupported film. Unsupported film of the uncured coating compound used for coating the base fabric shall be used for the gum strapping, for sealing seams, repair patches, and to fabricate the sleeve wristlets. The unsupported film shall be 0.025 ± 0.005 inch thick and thoroughly cleaned before application to the coverall. The gum strapping shall be 3/4 ± 1/8 inch wide for the seams, 1-1/4 ± 1/8 inches wide for the sleeve wristlet, and 1-1/2 ± 1/4 inches in diameter for repairs.

3.2.3 Cement. The cement used to seal the seams and the strapping over the seams shall be a curing modified butyl base cement. If the finished seam conforms to the requirements of 3.2.11 and table II, (see 3.2.12) the cement shall be considered satisfactory. The color of the cement, when dry shall approximate that of the coated cloth otherwise a clear cement shall be used.

3.2.4 Webbing, elastic. The elastic webbing shall be cotton elastic, conforming to type I, class 3, 3/4 inch wide, of JJ-W-155, or a woven or braided elastic webbing of equivalent grade may be used, except that the colorfastness requirements shall not apply. The elastic webbing may be furnished in black or Olive Drab 7 color.

3.2.5 Tape cotton. The tape for reinforcement of stud parts of snap fasteners on adjustment straps shall be cotton, dyed black or OD 7, 3/4 inch wide conforming to type I, class 3 of MIL-T-43566, except colorfastness requirements shall not apply.

3.2.6 Thread. The thread for seaming and stitching the coveralls, where required, shall be cotton, type IA3, ticket No. 30, 4 ply conforming to V-T-276. The thread shall be dyed black. Colorfastness requirements shall not apply.

* 3.2.7 Labels. Each coverall shall have a label containing the following information in sequence: size, identification and instructions. The label shall be applied to the inside back portion of the coverall in accordance with

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the currenversion before use.

type IV, class 14 of DDD-L-20. The marking medium shall be white, yellow, or light gray. The label may be marked on a piece of the uncured fabric specified in 3.2.1, then cemented on the coverall and cured with the coverall after assembly. The printed label shall be well defined and clearly legible after being tested for crocking, both wet and dry, when tested as specified in 4.4.6.

3.2.7.1 Instructions. The instructions shall be as follows:

1. Wear for protection against injury from dangerous liquid fuels and oxidizers. DO NOT USE the same coverall for fuels and oxidizers without washing between usage.

2. Put on over the clothing required to keep warm. Do not wear over bare skin.

3. Wear size Medium and make adjustments with straps and snaps in back. Wear size Large over cold weather clothing.

4. Roll back rubber wristlet, insert sleeve ring tightly in glove ring, and roll down rubber sleeve wristlet to seal the joint. When coverall is not in use, wristlet MUST BE left unrolled.

5. Do not tuck trouser cuff inside boot.

6. CAUTION: If dangerous agents are spilled on suit, wash down immediately. Use large ammounts of water for a thorough rinse.

3.2.8 Sleeve wristlet. The finished sleeve wristlet shall be cylindrical in shape and shall have a beaded or rolled edge 1/4 to 3/8 inch in diameter on one end. The wristlet shall be fabricated from unsupported film of the coating compound used to coat the coated fabric. The finished wristlet shall be 0.025 $\pm$ 0.005 inch thick, 3-3/4 $\pm$ 1/8 inches in diameter, and shall be 3 $\pm$ 1/8 inches in length.

3.2.9 Sleeve closure ring. The sleeve closure ring shall be molded from virgin unfilled polypropylene, natural in color. The molded pieces shall be uniform in color, texture and finish; and shall be free from cracks, blisters, scratches and other defects affecting serviceability. The dimensions of the molded polypropylene ring shall conform to figure 2. The closure ring shall conform to the requirements of table I. Acceptance shall be as specified in 4.4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

TABLE I. Properties of polypropylene material

Characteristic	Requirement	
	Minimum	Maximum
Specific gravity	0.895	0.904
Tensile strength (p.s.i)	4,000	---
Distortion under heat at 66 p.s.i. (Fiberstress) °F.	190	---

3.2.10 Snap fasteners. Snap fasteners shall consist of a size 1 or 2, 24 line size button with socket for the female half and a size 1 or 2 eyelet with stud for the male conforming to style 2, finish 2 of MIL-F-10884.

3.2.11 Sealed seams. All seams on the outer surface of the coverall shall be sealed with a strapping as specified in 3.2.2. After the seam has been cemented, the strapping shall be centered and cemented over the raw edge of the seam on the outside. The cement line may extend a maximum of 3/4 inch on either side of the strapping. After the coverall has been completely assembled, it shall be fully vulcanized.

3.2.11.1 Fuel resistance. The completed seams and surrounding area shall show no evidence of cracking, stiffening, flaking, swelling, separation of the strapping from the seam, separation of the coating from the fabric, or surface tack rating greater than II, when tested as specified in 4.4.6.

3.2.11.2 Acid resistance. The completed seams and surrounding area shall show no penetration as indicated by change of color of detector paper, no evidence of cracking, stiffening, flaking, separation of coating from fabric or separation of strapping from the seam, or surface tack rating greater than II, when tested as specified in 4.4.6.

3.2.12 Seam and seam strapping adhesion. Adhesion of the seam and seam strapping for all seams shall conform to requirements of table II when tested as specified in 4.4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

TABLE II. Requirements for seam and seam strapping adhesion

Test	Requirement
Seam gum strapping adhesion	3.5 lbs/inch
Seam gum strapping adhesion after immersion	3.0 lbs/inch
Seam gum strapping after heat aging	3.0 lbs/inch
Cemented seam adhesion	3.5 lbs/inch
Cemented seam adhesion after immersion	3.0 lbs/inch
Cemented seam adhesion after heat aging	3.0 lbs/inch
Resistance to cold crack of finished cemented and strapped seam	1/
Seam hydrostatic resistance of finished cemented and strapped seam	70 p.s.i.

1/ The seam shall show no signs of cracking, flaking, separation, stiffening, delamination or tackiness after test has been performed.

3.3 Design. The coverall shall have an open back, attached by means of an adjustable neck strap and elastic straps at back and at crotch and legs to afford protection to the front only (figure 1).

3.4 Patterns. Standard patterns, which provide a 5/8 inch allowance for all seams will be furnished by the Government to the contractor for cutting working patterns. The Government patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's work patterns. The working patterns shall be identical to the Government patterns.

3.4.1 List of pattern parts. The components of the coveralls shall be cut from the specified material in accordance with pattern parts indicated:

List of pattern parts

Material	Pattern nomenclature	Cut parts
Cloth, modified butyl rubber coated	Body	2
	Sleeve	2
	Collar	1
	Facings	2
	Sleeve facing	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

List of pattern parts (cont'd)

Material	Pattern nomenclature	Cut parts
Webbing, elastic	Adjustment straps (for length) and location of socket parts of snap fasteners)	
	Back adjustment strap	1
	Thigh adjustment strap	2
	Leg adjustment strap	2

3.5 Construction.

3.5.1 Stitches, seams and stitching. Stitch, seams, and stitching types as specified in table III shall conform to FED-STD-751.

3.5.1.1 Seam type, Seam types shall be as specified in table III, with seam allowance maintained and seams properly cemented and strapped so that no raw edges, twists, pleats, puckers, or open seams will result.

3.5.1.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

* 3.5.1.3 Type 301 stitching. Ends of all stitchings shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose bobbin or top thread, or excessive tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewed.

* 3.5.1.3.1 Repairs of 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, runoffs, or bobbin runouts occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:30Z
Check the source to verify that this is the currentversion before use.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

* 3.5.1.4 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

* 3.5.2 Assembly. The coverall shall be completely assembled, using an unvulcanized coated fabric (3.2.1), with all outside seams strapped, using an unvulcanized strapping as specified in 3.2.2. The cement for adherence of seams and strapping shall be as specified in 3.2.3. The assembled and vulcanized coverall may be cleaned with rubber makers naptha or other suitable cleaning agent which is not solvent for the cured coating compound. After assembly, the coveralls shall be dusted with an inert dusting powder.

3.5.3 Repairs in coating. Areas containing coating defects up to 1/2 inch maximum length may be repaired prior to vulcanization by application of a round patch using unsupported film specified in 3.2.2 and cement specified in 3.2.3. The patch shall be centered over the defect so that a minimum of 1/2 inch extends beyond all edges of the damaged area. The cement line may extend a maximum of 3/4 inch beyond the edge of the patch. The patch shall be smoothly and evenly adhered over the entire area and shall be well adhered to the coated fabric so that when subjected to flexing action between the hands, it will show no lifting of the edge, and no cracking, flaking or removal of the cement or patch. The repaired area shall show no stiffening or tackiness which would affect serviceability. Repairing of fabric coating defects by methods other than patching as indicated above are not authorized.

3.5.3.1 Location and number of repairs. Patches not exceeding six in number may be made to each coverall, provided not more than two patches are made on each of the following parts: collar, left leg area, right leg area, left sleeve, right sleeve, left upper body area, and right upper body area.

3.6 Manufacturing operations requirements. The coveralls shall be manufactured in accordance with operation requirements specified in table III. The contractor is not required to follow the exact sequence of operations except for operations 10, 11 and 12 which shall be performed after the suit has been vulcanized.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

3.6.1 Figures. Figures 1, and 4 are furnished for information purposes only. Figure 2 details dimensions of the sleeve closure ring. To the extent of any inconsistencies between the figures and the written document, the document shall govern.

TABLE III. Manufacturing operations

1. Cutting.
a. Cut the coverall in accordance with patterns furnished, which show size, shape and notches for proper assembly.
b. Cut the butyl rubber coated cloth so that the heavier coated side of the fabric shall form the outer surface of the coverall.
c. Cut elastic webbing for adjustment straps to length as indicated by patterns.
2. Replacement of damaged parts.
a. Replace at time of cutting any part containing a hole, cut, abraded area, tear, rip, area of no coating, brittle area which, when bent, results in a crack, imbedded foreign material which when removed, leaves exposed basic fabric or a through hole.
b. Replace any part damaged during the manufacturing process by needle chews, tears, holes, mends, burns, and exposed drill holes.
3. Hem inseams and bottom of legs.
Hem inseams of legs and bottom of legs by turning in the raw edges to the inside as indicated by marks on pattern and cement.
4. Outside edges.
Cement facings to inside of coverall, with facing not more than 1/16 inch from edges of coveralls.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations (cont'd)

5. Join fronts.

Join right and left front parts from neck to bottom of crotch by overlapping the front edges 5/8 ± 1/8 inch; cement the seam overlap and strap on the outside the length of seam with gum strapping centered on raw edge of seam. Strapping shall extend the full width of hem on the inside of coverall of crotch.

6. Make sleeves.

a. Join inseams of sleeves by overlapping the seams 5/8 ± 1/8 inch; cement the overlapped seam and gum strap the outside with gum strapping centered on the raw edge of seam.

b. Position sleeve facing on inside bottom of sleeve and cement.

7. Set sleeves.

a. Set sleeves to coverall by overlapping seam 5/8 ± 1/8 inch; cement the overlapped seams to the coverall parts.

NOTE: Overlap of seam may be reduced to not less than 3/8 inch at armpits to facilitate sleeve setting.

b. Strap the overlapping seams with gum strapping on the outside with the gum strapping centered on raw edge of seam.

8. Make and attach collar

a. Fold collar in half lengthwise and cement plies together to within 5/8 ± 1/8 inch from raw edge.

b. Insert coverall between uncemented plies of collar 5/8 ± 1/8 inch with left edge of collar even with left edge of coverall (as worn) and cement collar to coverall on inside and outside. Right end of collar shall extend beyond right edge of coverall (as worn).

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements (cont'd)

8. Make and attach collar (cont'd)

c. Cement together the seam allowance of the collar extension.

d. Strap the overlapped collar seam on outside of coverall with gum strapping on raw edge of seam.

9. Join sleeve wristlet and sleeve closure rings to sleeve.

a. Insert sleeve closure ring into end of sleeve 7/8 ± 1/8 inch and cement ring to sleeve.

b. Stitch sleeve to closure ring 5/16 to 5/8 inch from top inner edge of ring. 1/

c. Insert closure ring into sleeve wristlet so that bead of wristlet is 9/16 ± 1/8 inch from end of closure ring. Cement entire area of overlap from bottom edge of sleeve and raw edge of wristlet.

d. Cement and strap outside of wristlet raw edge with 1-1/4 ± 1/8 inch wide strapping, overlapping ends 1/2 to 5/8 inch at inseam of sleeve.

10. Make and attach adjustment straps.

a. Cut five pieces of cotton tape not less than 2-3/4 inches long and twelve pieces not less than 1-3/4 inches long.

b. Position the long pieces of tape at ends of adjustment straps and the shorter pieces centered on each mark for socket location as indicated by marks on pattern, and seam to elastic webbing 1/16 to 3/16 inch from edges on all four sides. 1/

c. Position adjustment straps on left back and inseams as indicated by marks on pattern and secure with box stitching. Stitching shall be 1/16 to 3/16 inch from edges. 1/

d. Cement the semi-circular patches of the basic material (cured) cut not less than 2 by 1-3/4 inches over stitching on outside of coverall.

- or -

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements (cont'd)

10. Make and attach adjustment straps. (cont'd)

e. Thoroughly impregnate all thread exposed on outside of coverall with a solution of the coating compounds.

11. Attach snap fastener parts.

Finished appearance. The stud parts of snap fasteners on right and left back parts of coverall shall face to the inside and be covered on outside of coverall by semi-circular patches of basic material, cut not less than 2 by 1-1/2 inches. On collar they shall face outside. Cap portion of snap fasteners on adjustment straps shall face the inside of the coverall. The cap portion of the snap fasteners on the collar shall face outward.

a. Position all parts of snap fasteners as indicated by marks on patterns.

b. Attach socket (and cap) parts as follows:

Two on collar extension
Two on adjustment strap of left back
Two on each leg adjustment strap
Three on each thigh adjustment strap

c. Attach a stud (and post) parts as follows:

Two on left end of collar
Two on left back edge of coverall through facing
Three on right back edge of coverall through facing

d. Cement reinforcement patches over post parts of studs on outside of coverall.

12. Check coveralls.

a. Close all snap fasteners checking positioning, leg strap elongation, and uniformity of stud and socket positioning.

b. Release snap fasteners and check security of attachment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements (cont'd)

12. Check coveralls. (cont'd)	
c. Check all outside seams for security of strapping and seam coverage.	

1/ Sewing operations shall be accomplished by using 301 stitch type, SSa-1 seam type, 6-8 stitches per inch, and 30-4 size thread for needle and bobbin.

3.7 Finished measurements. The finished measurements for the coverall shall conform to table IV.

TABLE IV. Finished measurements inches

	Medium	Large	Tolerance
Chest 1/	41	44	± 3/4
Sleeve inseam 2/	23-1/2	25	± 3/4
Leg inseam 3/	22	24	± 1/2

1/ With coveralls open and flat, measure across from edge to edge 1/2 inch below armhole seam.

2/ Measure the sleeve inseam from the base of armhole along the inseam of sleeve to bottom of sleeve closure ring.

3/ Measure from the base of crotch along the inside edge of leg to the bottom.

3.8 Workmanship. The finished coverall shall conform to the quality of product established by this document. The occurence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4. The presence of any defect shall be cause for rejection of the first article.

* 4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase doucment.

4.4.1.1 Certification. The contractor shall furnish, to the contracting officer, a certificate of compliance stating that the sleeve closure ring conforms to the requirements specified in 3.2.9.

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

* 4.4.3 End item visual examination. The end item shall be examined for the defects listed below. The lot size shall be expressed in units of coveralls. The sample unit shall be one coverall. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the currentversion before use.

units, shall be 2.5 for major defects and 15.0 for total (major and minor combined) defects. The finding of one or more critical defects shall be cause for rejection of the lot.

Defects	Classification Critical	Major	Minor
Finish (applicable to all components)			
Not as specified.			X
Cleanness			
a. Cement line extends more than 3/4 inch on either side of the strapping.			X
b. Spot, stain, or foreign matter, which cannot be readily removed with rubber marker naptha or other suitable cleaning agents.			X
Material (general)			
Any component not fabricated of the specified material.		X	
Coated fabric			
a. Hole, cut or abraded area exposing base fabric, tear, or rip through material.	X		
b. Area of no coating.	X		
c. Blister, tunnel, or delamination of coating.	X		
d. Brittle area which when bent results in a crack.	X		
NOTE: If any of the above four conditions occur on a reinforcement patch, hem, or adjustment strap, it shall be classified as a minor defect.			

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the currentversion before use.

Defects	Classification Critical	Major	Minor
Coated fabric (cont'd)			
e. Area of excessive coating, i.e., solid runs, ridges, or lumps.			X
f. Patches or repairs.			X
(1) Patch less than 1-1/4 inches.		X	
(2) Patch greater than 1-3/4 inches but not greater than 2 inches.			X
(3) Patch greater than 2 inches.		X	
(4) More than two patches per pattern part.			X
(5) More than six patches per coverall.		X	
(6) Edge of patch lifing, cracking, flaking, or removal of the cement on patch when hand flexed as specified in 3.5.3.	X		
(7) Patch not smoothly and evenly adhered.		X	
(8) Patch area excessively stiff or tacky.	X		
(9) Patch extends less than 1/2 inch beyond all edges of the damaged area.		X	
(10) Any unauthorized repair, e.g., coating applied to defect in lieu of patching.	X		
g. Pit or abraded area but not through material or not to a degree where base fabric is exposed.			X
h. Tacky, i.e., improper vulcanization.		X	
i. Imbedded foreign material which when removed will expose base fabric or leave a through hole.	X		
j. Foreign inclusion which cannot be readily removed or if removable, does not expose base fabric.		X	

NOTE: A pick glass may be used to determine the degree of the deficiency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

Defects	Classification Critical	Major	Minor
Construction and workmanship (general)			
a. Any component omitted, unless otherwise classified herein.		X	
b. Heavy coated side not on exterior of coverall.	X		
c. Any part not cut in accordance with directional lines on pattern.		X	
d. Any component not securely attached or affixed.		X	
e. Any component misplaced, not serving intended purpose, unless otherwise classified herein.		X	
f. Any part twisted or distorted.		X	
g. Any component damaged, not as specified, or otherwise defective.		X	
Stitching			
a. Not type specified.			X
b. Omitted at free end of elastic strap.			X
c. Omitted at attached end of elastic strap.		X	
d. Not securely stitched where required.			X
Assembly of vulcanized and cemented parts			
a. Not joined in accordance with the specified construction.	X		
b. Open seam completely through coverall.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

Defects	Classification Critical	Major	Minor
Assembly of vulcanized and cemented parts (cont'd)			
c. Any hole, cut, tear, or rip in the seam strapping exposing base fabric.	X		
d. Area of delamination other than on strapping but does not constitute an opening completely through coverall.			X
e. Area of delamination at edge of strapping 1/16 inch or more, but does not extend to the raw edge of seam.			X
f. Area of delamination of strapping extending to the raw edge of the seam.	X		
g. Seam strapping off center on outer edge of seam lap by more than 1/4 inch.			X
h. Seam strapping not covering raw edge of seam.	X		
i. Leg reinforcements omitted.	X		
j. Lighter coated side of leg reinforcements finished on inside of coverall.		X	
NOTE: Extent of delamination (or tunnel) may be determined by insertion of any blunt end instrument suitable for this purpose. Penetration of the instrument shall cease immediately if resistance is met.			
Snap fasteners			
a. Any part of a snap fastener, except on the collar, missing, damaged, malformed, or reversed on assembly so that it will not function.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

Defects	Classification Critical	Major	Minor
Snap fasteners (cont'd)			
b. Any part of one snap fastener on the collar missing, damaged, or malformed so that the snap fastener will not function.			X
c. Any part of both snap fasteners on the collar missing, damaged, or malformed so that the snap fasteners will not function.	X		
d. Any part of snap fastener on the lower leg missing, damaged, malformed so that the snap fastener will not function.	X		
e. Any part of two snap fasteners except on the collar missing, damaged, or malformed so that the snap fasteners will not function.	X		
f. Any sharp burrs or ridges.	X		
Construction and workmanship (detailed)			
Collar			
a. Not attached as specified.		X	
b. Outside strapping on the collar seam missing.		X	
Sleeves			
a. Closure ring not inserted into end of sleeve as specified.			X
b. Facings omitted.			X
Closure ring			
a. Not as specified.		X	
b. Sharp edges not removed from ends.		X	
c. Distorted, twisted, or damaged.		X	
d. Any blister, crack, fracture, or other defect.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

Defects	Classification Critical	Major	Minor
Closure ring (cont'd)			
e. Not attached as specified.		X	
f. Omitted.		X	
Sleeve wristlet			
a. Not beaded at the end.		X	
b. Wristlet does not fit to plastic ring.		X	
Adjustment straps			
a. Any, other than on lower leg, missing, misplaced so as not to serve their intended function, or damaged to a degree where they may break during use.		X	
b. Any, on lower leg, missing, misplaced so as not to serve their intended function, or damaged to a degree where they may break during use.	X		
c. Any two, other than on lower leg, missing, misplaced so as not to serve their intended function, or damaged to a degree where they may break during use.	X		
d. Patches not covering stitches on outside of coverall.		X	
Markings (label)			
Missing, incorrect, illegible, not in specified location, characters not of specified height, incomplete, not specified color, or not accomplished as required.			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

* 4.4.4 End item dimensional examination. Any measurement deviating from the dimension and tolerance specified in table IV shall be scored as a defect. Inseams uneven in length by more than 1/2 inch shall be scored as a defect. The lot size shall be expressed in units of one coverall. The sample unit shall be one coverall. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

* 4.4.5 End item critical defect examination. Every end item in lots found acceptable under the visual and dimensional examinations in 4.4.3 and 4.4.4 shall be examined for the critical defects listed in 4.4.3. Any end item found to contain one or more critical defects shall be rejected.

4.4.6 End item testing. The method of testing specified in FED-STD-191 wherever applicable and as listed in table V shall be followed, except that the results of the physical testing of the coated material, obtained under testing conditions defined in FED-STD-406, FED-STD-601 or FED-STD-191 will be acceptable, except in dispute cases; in dispute cases, tests shall be conducted with both the specimen and test apparatus under standard conditions as defined in FED-STD-191. Except for the adhesion of gum strapping and cemented seams and the hydrostatic resistance of cemented seams all the physical and chemical values specified in section 3 apply to results of each individual determination. The adhesion of gum strapping, cemented seams and the hydrostatic resistance of cemented seams value specified in section 3 apply to lot average of all determinations. The sample unit shall be two finished coveralls. The sample size shall be as follows:

Lot size (coveralls)	Sample size (sample units)
280 or less	1
281 to 500	2

NOTE: No lot shall exceed 500 coveralls.

The lot shall be unacceptable if any individual determination or the lot average of all determinations as applicable, fail to meet any requirements specified. All test reports shall contain the individual values utilized in expressing the final results.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

TABLE V. End item tests

Component	Characteristic	Requirement paragraph	Test procedure	No. of determinations	Results reported as
Label	Crocking	3.2.7	5651 1/		
	Dry			1	Pass or fail
	Wet			1	Pass or fail
Seam and seam strapping	Adhesion	3.2.12	4.5.1	3	Numerically to nearest 0.1 lb/in
	Adhesion after immersion	3.2.12	4.5.1.1	3	Numerically to nearest 0.1 lb/in
	Adhesion after heat aging	3.2.12	4.5.1.2	3	Numerically to nearest 0.1 lb/in
Cemented seams	Adhesion	3.2.12	4.5.2	3	Numerically to nearest 0.1 lb/in
	Adhesion after immersion	3.2.12	4.5.2.1	3	Numerically to nearest 0.1 lb/in
	Adhesion after heat aging	3.2.12	4.5.2.2	3	Numerically to nearest 0.1 lb/in
	Resistance to cold crack	3.2.12	4.5.3	1	Pass or fail
	Acid resistance	3.2.11.2	4.5.4.3	2	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

TABLE V. End item tests (cont'd)

Component	Characteristic	Requirement paragraph	Test procedure	No. of determinations	Results reported as
Cemented seams (cont'd)	Fuel resistance	3.2.11.1	4.5.4.4	2	Pass or fail
	Surface tack after fuel exposure	3.2.11.1	4.5.4.5	2	Pass or fail
	Surface tack after acid exposure	3.2.11.2	4.5.4.5	2	Pass or fail
	Hydrostatic resistance	3.2.12	5512 2/	5	Numerically to nearest 1 lb/sq in

1/ The label shall be cut from the coverall to give a test specimen 4 by 8 inches with the legend centrally located and with the printing perpendicular to the lengthwise direction, and so positioned within the specimen as to be encompassed in the test area.

2/ Hydrostatic pressure shall be applied to the outside of the seam with seam centered directly over the opening.

* 4.4.7 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number of unit packs is more or less than required Number of coveralls per unit pack is more or less than required 1/ Size shown in one or more coveralls not as specified on unit pack or shipping container 1/

1/ For this defect, one unit pack from each container in the sample shall be examined.

* 4.4.8 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with requried straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.5 Methods of inspection.

4.5.1 Seam gum strapping adhesion test. The adhesion of the gum strapping to the seam shall be determined as specified in Method 5962 of FED-STD-191, except as follows:

The test sample shall age at least 48 hours after application of the strapping and vulcanization of the assembly before testing. Only straight seamed and strapping section shall be tested. The test specimen shall have the gum

Source: https://assist.dla.mil -- Downloaded: 2026-01-21T20:30Z
Check the source to verify that this is the current version before use.

strapping peeled back from the seam for a distance of 2-1/2 to 3 inches. The end of the separated gum strapping shall be clamped in the upper jaw and the lapped seam with strapping removed, clamped in the lower jaw. The results shall be calculated to the nearest 0.1 pound per inch of width.

4.5.1.1 Seam strapping adhesion after immersion. The strapping shall be immersed for 2 hours in boiling water, removed, immersed for 15 minutes in water at 80° ± 9°F, removed from the water, and while still dripping wet, tested for seam strapping adhesion as outlined in 4.5.1.

4.5.1.2 Seam strapping adhesion after heat aging. Samples shall be exposed for 7 days in a circulating air oven at 158°F ± 2°F, removed from the oven, conditioned for 24 hours at standard conditions and then tested for seam strapping adhesion as outlined in 4.5.1.

4.5.2 Cemented seam adhesion test. The samples used in the performance of the test specified in 4.5.1 (with gum strapping removed) shall be used as the test samples for this test. The adhesion of the cemented seam shall be determined as specified in Method 5960 of FED-STD-191. The results shall be calculated to the nearest 0.1 pound per inch of width.

4.5.2.1 Seam adhesion after immersion. The seam shall be immersed for 2 hours in boiling water, removed, immersed for 15 minutes in water at 80° ± 9°F, removed from the water and while still dripping wet, tested for seam adhesion as outlined in 4.5.2.

4.5.2.2 Seam adhesion after heat aging. Samples shall be exposed for 7 days in a circulating air oven at 158° ± 2°F, removed from the oven, conditioned for 24 hours at standard conditions and then tested for seam adhesion as outlined in 4.5.2.

4.5.3 Resistance of finished seams to cold crack test. The test shall be performed as specified in Method 5874 of FED-STD-191 with the following exceptions: Test temperature shall be -40° ± 2°F. Test specimens shall be conditioned for not less than 4 hours at test temperature prior to testing. Test specimens shall be prepared by folding so that two seam surfaces are superimposed. The roller weight shall be passed along the fold and across the seam. The seam shall show no sign of cracking, flaking, separation, stiffening, delamination, or tackiness after test has been performed. The test specimen shall be visually examined for failure after test. No hydrostatic test shall be performed after cold test.

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:30Z
Check the source to verify that this is the current version before use.

4.5.4 Chemical resistance tests of finished seam.

* 4.5.4.1 Apparatus and chemicals.

(a) Test jig No. 2 (see Drawing 2-1-3).
(b) Wax - paraffin wax or a mixture of paraffin and beeswax containing not more than one-third beeswax.
(c) Petroleum jelly.
(d) Aluminum block - dimensions approximately 4 by 2-7/16 by 1/2 inches.
(e) Chemical agents detector paper - M9 conforming to MIL-P-51493.
(f) Propellant nitric acid types IIIA or IIIB conforming to MIL-P-7254 (see 6.5).
(g) Glass supporting and cover plates measuring 8 by 8 inches.
(h) Distilled water.
(i) Onion skin paper conforming to type V of UU-P-328.
(j) Roller - approximately 5-1/2 inches in diameter, 2 inches wide, and 10 pounds in weight.
(k) Calcium chloride, anhydrous, conforming to type II, grade A of O-C-105.

4.5.4.2 Preparation of test specimens. The test specimen shall be a section, 6 inches in diameter, including a length of finished strapped seam equal to the specimen diameter. The test specimen shall be placed in the test jig (see Drawing 8-1-3) in the following manner:

(a) Place the test specimen between the spacer inserts and seal with melted wax. The wax shall form a continuous bead covering the outer circumference of the insert assembly.

(b) Place the insert assembly in the test jig sleeve and fill the cavity between the insert assembly and the sleeve wall with melted wax. Mate the jig sleeve and jig collar and screw hand tight.

(c) Seal the inside of the sleeve collar assembly with melted wax. The wax seal shall be continuous and shall extend around and out on to the test specimen approximately 1/8 inch, and up the inside of test jig to a point approximately 1/8 inch above the top of the spacer insert. Turn the jig assembly over and seal the bottom cavity with melted wax in similar fashion.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the currentversion before use.

(d) During chemical exposure, the top of the test apparatus shall be covered with a glass plate.

4.5.4.3 Acid resistance of the finished seam and surrounding area.

(a) Prepare test specimen as specified in 4.5.4.2.

(b) Place test assembly in desiccator oven calcium chloride conforming to type II, grade A of O-C-105 and condition at 70 ° ± 2°F, for a minimum of 16 hours.

(c) After conditioning, remove from desiccator and immediately perform acid exposure test as follows:

(1) Coat bottom and top edges of the test jig with 1/32 inch of petroleum jelly.

(2) Place aluminum block in the center of a glass supporting plate with a piece of the vesicant detector paper, coated side up, on top of the block. Place the test assembly over the block with the heavily coated side of the test specimen up.

(3) Cover the test specimen with 50 milliliters of propellent nitric acid and cover top of the test jig with glass cover plate.

(d) After 2 hours acid exposure at 70° ± 2°F and 65 ± 2 percent relative humidity, remove the test specimen from the test jig, rinse in distilled water, dry at stated conditions for approximately 4 hours and examine for conformance to requirements in 3.2.11.2.

4.5.4.4 Fuel resistance of the finished seam. The test specimen, prepared as specified in 4.5.4.2 and conditioned as specified in 4.5.4.3, shall be covered with 50 milliliters of JP-4 of MIL-T-5624 for 15 minutes at conditions of 70° ± 2°F, and 65 ± 2 percent relative humidity. After fuel exposure, the test specimens shall be removed from the test jig, rinsed in distilled water, dried for approximately 4 hours at the stated conditions and examined for conformance to requirements in 3.2.11.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

4.5.4.5 Surface tack rating of the finished seam. The surface tack test shall be conducted, under conditions of 70° ± 2°F and 65 ± 2 percent relative humidity as follows:

(a) The test specimen, prepared as specified in 4.5.4.2 and conditioned as specified in 4.5.4.3 shall be covered with 50 milliliters of the specified acid or fuel.

(b) After 15 minutes exposure, under conditions of 70° ± 2°F and 65 ± 2 percent relative humidity, the specimen shall be removed from the test jig, rinsed in distilled water, and dried for approximately 4 hours at stated conditions.

(c) Surface tack rating shall be determined as follows:

(1) The specimen, with wax line removed by cutting or scraping shall be placed exposed side up on a smooth hard surface, and covered with a 2 by 4 inch piece of onion skin paper.
(2) The roller shall be passed along the full length of the onion skin paper covered seam twice in each direction (four passes) with pressure applied by the weight of the roller only.
(3) After rolling, the onion skin paper shall be peeled from the test specimen and the surface tack rating determined by comparison with figure 3 and rating standards.

Rating standards 1/

Rating I - A rating of I shall be equivalent to no trace 2/ of coating material retained on the test paper of or trace of paper fiber adhering to test specimen surface.

Rating II - A rating of II shall be equivalent to a trace 2/ of coating material retained on the test paper and/or a trace of paper fiber adhering to the test specimen surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

Rating III - A rating of III shall be equivalent to any degree of coating material or paper fiber transfer in excess of rating II.

1/ Figure 3 pictorially represents the Rating Standards.

2/ A trace is defined as coating material or paper fiber transfer covering 25 percent of test specimen area.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Two pairs of coveralls of one size only, folded and positioned as shown in figure 4(Drawing 2-1-474), shall be completely wrapped in 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. The coveralls shall be completely separated by a sheet of the specified kraft paper prior to wrapping. The wrapped coveralls shall be unit packed in a fiberboard box conforming to style RSC, type CF, class domestic, (variety SW), grade 175 of PPP-B-636. Inside dimensions of each fiberboard box shall be 22 inches in length, 14 inches in width, and 5 inches in depth. Box closure shall be secured with 2-inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

* 5.1.2 Commercial. Coveralls shall be preserved in accordance with ASTM D 3951.

* 5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Four pairs of coveralls of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A unit packs shall be packed flat two in depth, within a shipping container. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.6.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B packing. Four pairs of coveralls of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, two in depth, within the shipping container. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 12 inches in depth. Appproximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.6.

* 5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.6.

* 5.2.3 Commercial. Coveralls, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), coveralls packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern number three shall be used as found in the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The coveralls are intended for wear by military personnel in contact with guided missle propellents as a limited protective outer covering.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, date, and number of this document.
b. Size required (see 1.2).
c. When a first article sample is required (see 3.1.2).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

6.3 Sample. For access to samples of the end item, address the contracting activity issuing the invitation for bids.

* 6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample, and consisting of at least one completely finished coverall. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

* 6.5 Conductance of acid resistance tests. Because of the danger involved in handling and shipping of propellant nitric acid, the acid resistance test specified in 4.5.4.1 will be performed by the government. The samples to be tested for acid resistance should be forwarded to the following address:

Commander
Defense Personnel Supply Center
Clothing and Textile Laboratory Branch
ATTN: DPSC-TTL
2800 South 20th Street
Philadelphia, PA

6.6 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activities:


Navy - AS, SH
Air Force - 45

Preparing activity:


Army - GL

Project No. 8415-0147

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

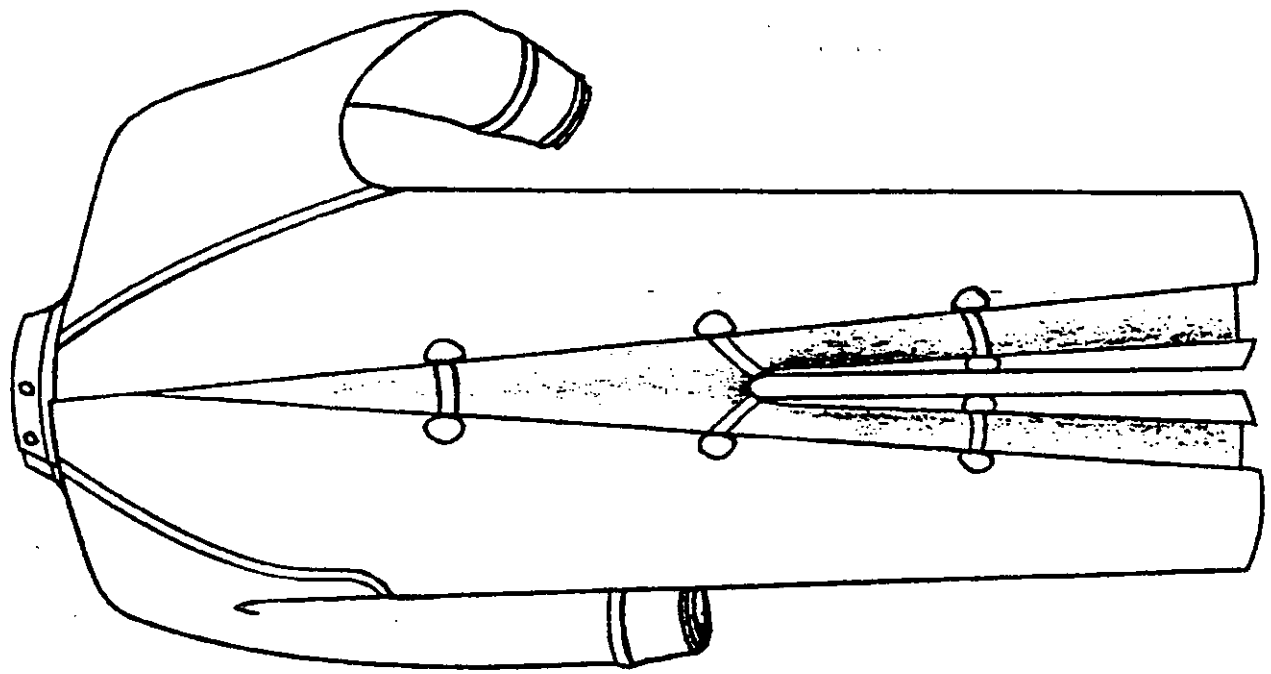

BACK

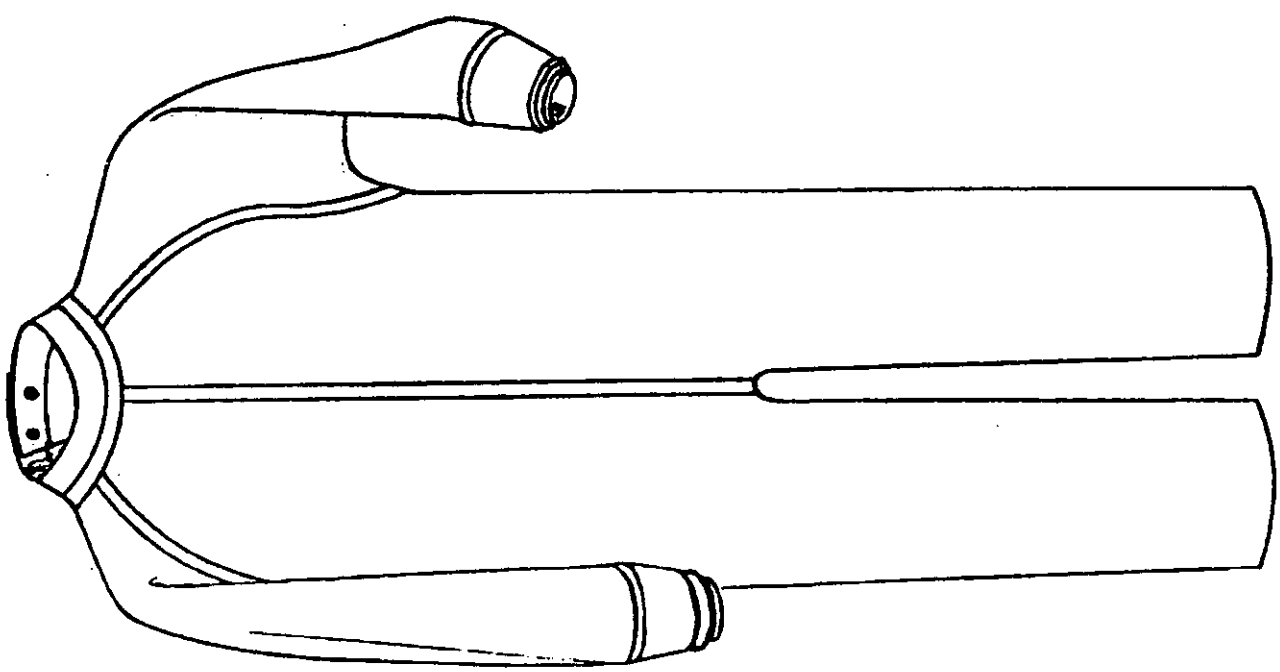

FRONT

FIG. 1 - COVERALL, ROCKET FUEL HANDLER'S, LIMITED PROTECTION
2-1-945

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

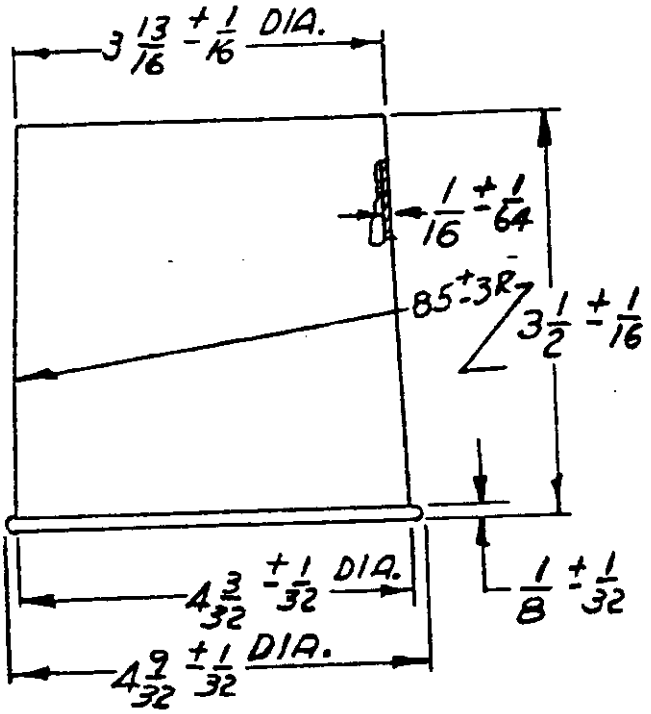


FIG 2. - COVERALLS, ROCKET FUEL HANDLERS
CLOSURE RING, SLEEVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

RATINGS

I II III


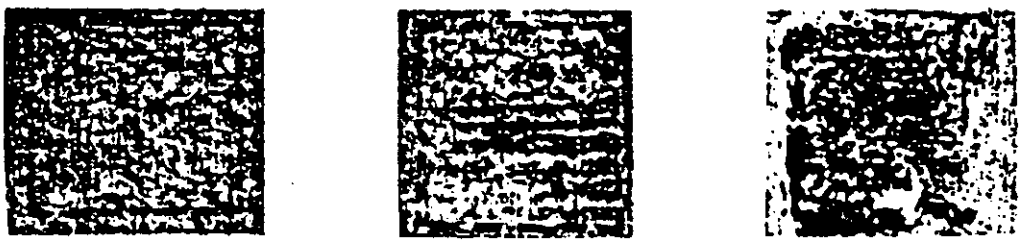


FIGURE 3 SURFACE TACK STANDARDS

NITRIC ACID TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

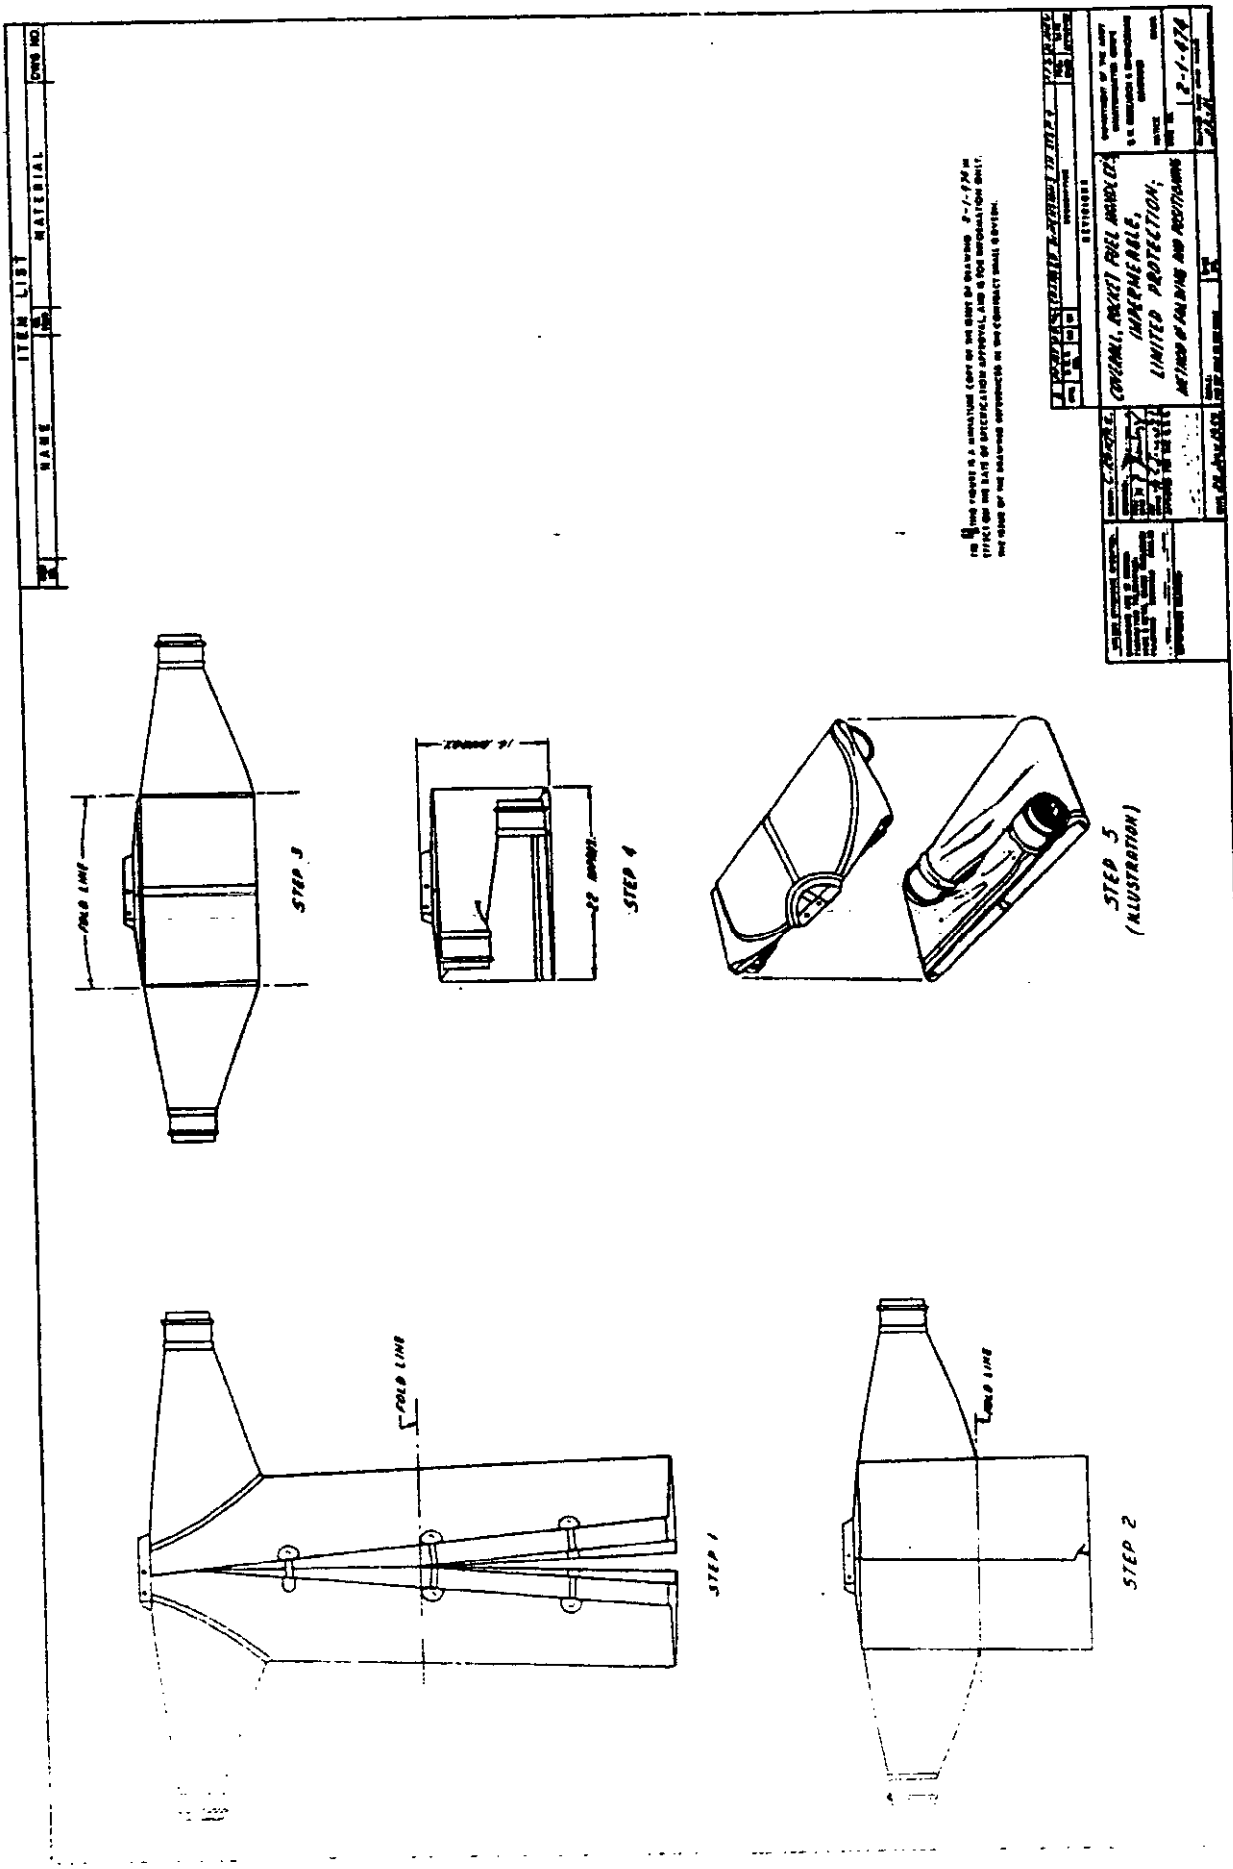

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:30Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US ARMY NATICK RESEARCH
and DEVELOPMENT CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research
and Development Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-43082E	COVERALL, ROCKET FUEL HANDLER'S: IMPERMEABLE, LIMITED PROTECTIO

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 20 Nov 84

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:30Z
Check the source to verify that this is the current version before use.