MIL-H-43048B(GL)
12 June 1981
SUPERSEDING
MIL-H-43048A(GL)
6 June 1966

MILITARY SPECIFICATION

HOOD, FLEXIBLE, GASOLINE RESISTANT, PROTECTIVE

This specification is approved for use by the Natick Research and Development Laboratories, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of lightweight hood in one size for gasoline protection.

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-375	-	Plastic, Film, Flexible, Vinyl Chloride
DDD-L-20	-	Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-566		Boxes, Folding, Paperboard
PPP-B-601	-	Boxes, Wood Cleated-Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-676	-	Boxes, Set-Up
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5430

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:27Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment

(Copies of specifications, standards and drawings required by contactors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ANSI/ASTM D 882 - Tensile Properties of Thin Plastic Sheeting

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from the specification may appear in the sample, in which case, the specification shall govern.

* 3.1.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.2 Material (see 6.5).

3.2.1 Vinyl film. The vinyl film used to construct the hood shall conform to type I, class 1 of L-P-375 and shall be 0.0040 inch (0.102 mm) thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:27Z
Check the source to verify that this is the current version before use.

3.2.2 Vinyl sheet. The clear vinyl sheet used to contruct the face piece shall conform to the requirements for type I, class 1, thickness 0.020 inch (0.51 mm) of L-P-375 except as follows:

(a) Stiffness requirements shall not be applicable.

(b) The vinyl sheet shall be 0.040 to 0.042 inch (1.02 to 1.07 mm) thick.

(c) The vinyl sheet shall be press polished on both sides.

3.2.3 Label. Each hood shall have an identification label conforming to either type III or IV, class 1 of DDD-L-20. The label shall be located on the inner side of the back hood section approximately 1 inch (25 mm) from the lower edge. The label shall remain legible and shall have fair fastness to wet and dry crocking when tested as specified in 4.4.2.2.

3.3 Construction. The hood shall be constructed as illustrated in figure 1. The parts shall be cut in accordance with standard patterns. The front and back sections shall be cut from the material specified in 3.2.1. The clear vinyl face piece shall be cut from the material specified in 3.2.2. All parts shall be joined by electronic or other heat sealing procedures. The seal shall be 1/16 to 1/8 inch (2 to 3 mm) wide. When the front and back hood sections are joined, the dart seams shall meet at the top of the hood within 1/4 inch (6 mm) of the center of the top.

3.3.1 Patterns. Standard patterns which provide a 1/8 inch (3 mm) seam allowance for all seams will be furnished by the Government. The standard patterns are to be used only as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.3.1.1 List of pattern parts. The pattern parts for the hood shall be cut in the quantities and from materials indicated below:

Material	Item	Nomenclature of part	Cut parts per hood
Vinyl film 0.0040 inch (0.1016 mm) thick	1	Back hood section	1
	2	Front hood section	1
Vinyl sheet 0.040 inch (1.016 mm) thick	3	Face piece	1

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:27Z
Check the source to verify that this is the currenversion before use.

3.4 Performance.

* 3.4.1 Seam strength. When tested as specified in 4.4.2.2, the strength of the seam joining the front section to the back section of the hood and the strength of the seam joining the clear vinyl face piece to the front section of the hood shall be not less than 65 percent of the breaking strength of the 0.0040 inch (0.102 mm) thick film.

* 3.5 Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2.1 shall be removed from production and replaced with non-defective and properly matched components.

3.6 Workmanship. The hood shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the specified acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2.1.1 and tested for the characteristics specified in table I. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:27Z
Check the source to verify that this is the current version before use.

4.4.2 End item inspection.

4.4.2.1 End item examination. The end item shall be examined for defects in 4.4.2.1.1. The inspection level shall be I and the acceptable quality level (AQL) shall be 2.5 defects per 100 units. The lot size shall be expressed in units of one hood.

4.4.2.1.1 Visual examination.

Examine	Defect
Material (general)	Not as specified Any hole, tear, cut, rip or crack Any scratch, bubble or blister affecting serviceability
(Face piece)	Any side not press polished Not clear
Construction and workmanship (general)	Any section consisting of more than one cut part Any part not cut according to pattern Any part not joined as specified Any factory damage Any open seam Seal width less than 1/16 inch (2 mm) or more than 1/8 inch (3 mm) Dart seams do not meet within 1/4 inch (6 mm) of the center of the hood top
Marking	Missing, incomplete, illegible, not in proper location, not specified color or not accomplished in the specified manner

4.4.2.2 End item testing. The end item shall be tested for the characteristics listed in table I. The lot size for test shall be all completed hoods submitted for inspection at one time, and shall be expressed in units of one hood each. The sample unit shall be one complete hood. The inspection level shall be S-2 with no more than one hood drawn from a shipping container. The acceptable quality level (AQL) shall be 4.0 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:27Z
Check the source to verify that this is the current version before use.

TABLE I. Testing of the end item

Characteristic	Requirement paragraph	Test method	Number of determinations per sample unit	Results reported as Pass or fail	Results reported as Numerically to nearest
Colorfastness to wet and dry crocking and legibility of labels	3.2.3	Method 5651 of FED-STD-191	1	X	-
Strength of: Seam joining front section to back section	3.4.1	4.5	-	-	1.0%
Strength of: Seam joining clear vinyl face piece to front section	3.4.1	4.5	-	-	1.0%

* 4.4.3 Packaging inspection. An examination shall be made to determine that preservation, packing and marking comply with the section 5 requirements. Defects will be scored in accordance with the list below. The sample unit shall be one shipping container, fully packaged, except it need not be closed. Examination for closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per 100 units.

Examine	Defect
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components: such as incomplete closure of container flap, loose strapping, improper taping, or inadequate stapling. Bulged or distorted container.
Contents	Number of units or intermediate packages per shipping container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:27Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection.

* 4.5.1 Seam strength. The breaking strength of the seams shall be determined in accordance with the procedures for tensile strength as specified in ANSI/ASTM D 882, Method B, except two specimens per sample unit shall be tested and the breaking strength of the seam shall be the maximum load at break. The breaking strength shall be reported as the average of the test results for the two specimens. The specimen shall be 1 inch (25 mm) wide and shall be cut with its length dimension across the seam. The specimen shall be mounted in the test machine so the seam is equidistance from the grips and perpendicular to the direction of the force applied. The breaking strength of the vinyl film shall also be obtained as indicated above except, the specimens shall be selected from an area of the vinyl film where there are no seams. The percent strength retained by the seam shall be calculated as follows:

$$\frac{\text{Breaking strength of seam lbs. (N)}}{\text{Breaking strength of vinyl film lbs. (N)}} \times 100 = \text{Percent strength retained by seam}$$

* 5. PACKAGING

* 5.1 Preservation. Packaging shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit pack. Each hood shall have the vinyl film hood sections neatly and closely folded around the vinyl sheet face piece. The folded hood shall measure approximately 6 by 10 inches (152 by 254 mm). Three folded hoods shall be stacked together and placed in an open end style, substance 28, brown kraft paper envelope measuring 6-1/2 inches (165 mm) by 10 inches (267 mm). The envelope shall be supplied with either a gummed flap, metal clasp, or string and button closure

* 5.1.1.2 Intermediate pack. Eighteen hoods, unit packed as specified in 5.1.1.1, shall be placed flat in a folding paperboard box conforming to variety 1, style III, type B, class a of PPP-B-566; or setup paperboard box conforming to type I, variety 1, class a, style 4 of PPP-B-676. Inside dimensions of each box shall be 10-3/4 inches (273 mm) in length, 6-3/4 inches (171 mm) in width and 3 inches (76 mm) in depth. The box closure shall be secured with 3 inch (76 mm) minimum width gummed paper tape conforming to type III, grade B of PPP-T-45, applied at the center of the length opening and extending along the bottom and up each side at least 2 inches (51 mm).

* 5.1.2 Commercial. Hoods shall be preserved in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:27Z
Check the source to verify that this is the current version before use.

* 5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. Hoods, preserved as specified in 5.1, shall be packed in a close-fitting cleated-plywood or nailed wood shipping container conforming to overseas type, style optional, grade B of PPP-B-601 or class 2, style optional, grade B of PPP-B-621, respectively. Closure and strapping shall be in accordance with the applicable container specification.

5.2.2 Level B packing. One hundred and eighty hoods, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Level A packages shall be packed on end, five in length, two in width and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 16 inches (406 mm) in length, 14-1/4 inches (362 mm) in width and 11 inches (279 mm) in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed in accordance with Method III waterproofed in accordance with Method V and reinforced as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.3.

* 5.2.3 Commercial packing. Hoods preserved as specified in 5.1 shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packs, intermediate packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

6. NOTES

6.1 Intended use. The hood is intended to be used as a component in Repair Kits, Emergency, Collapsible Tanks, and Drums Petroleum, conforming to MIL-R-52255.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.1.2, 4.3 and 6.4).
(c) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

6.3 Sample. For access to samples, address the procuring activity issuing the invitation for bids (see 3.1.1).

* 6.4 First article. When a first article is required it shall be inspected and approved under the appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample and should consist of two hoods. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for examinations, tests, and approval of the first article.

* 6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:27Z
Check the source to verify that this is the currentversion before use.

* 6.6 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and are for information only. In each instance, the value stated in US customary units shall be controlling.

6.7 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - MD, ME, SM

User activities:

Army - AR
DCSC - SS

Preparing activity:

Army - GL

Project No. 5430-A132

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:27Z
Check the source to verify that this is the currentversion before use.

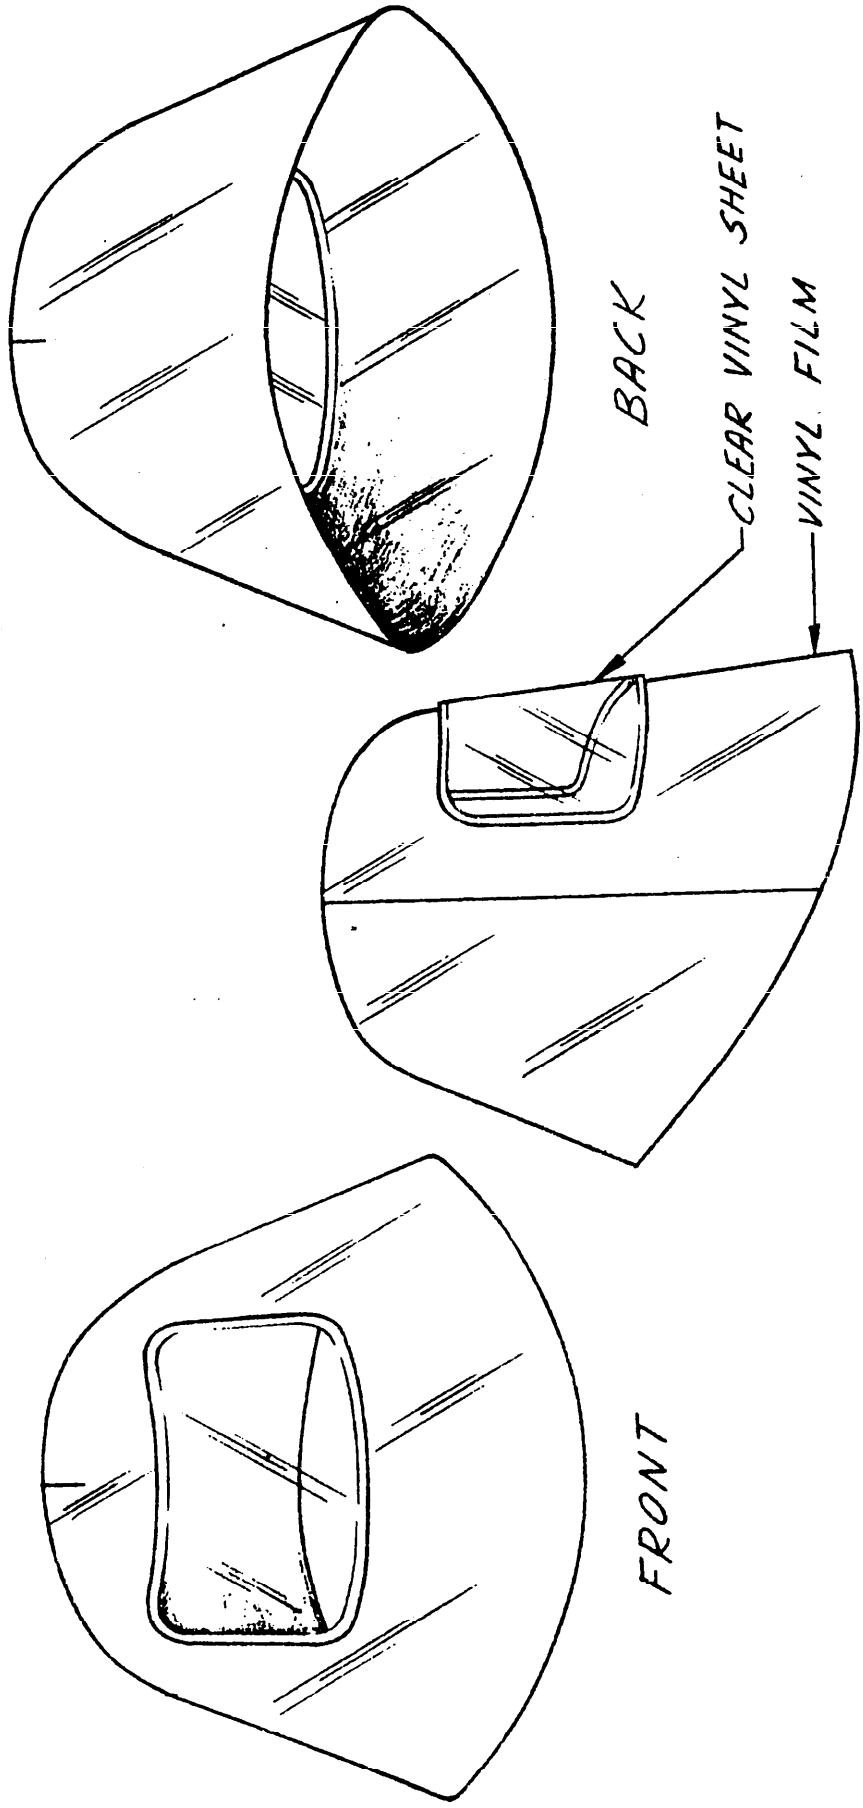


FIG. 1 - HOOD, FLEXIBLE, GASOLINE RESISTANT, PROTECTIVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-H-43048B(GL) Hood, Flexible, Gasoline Resistant, Protective

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

FOLD

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/4645 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:27Z
Check the source to verify that this is the current version before use.