GGG-F-00626a(GSA-FSS)
January 15, 1966
Int. Rev. of Fed. Spec. GGG-F-626
October 25, 1954

INTERIM FEDERAL SPECIFICATION

FORK, STONE, HAND, D-HANDLE

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers stone forks with D-type handles.

1.1.1 Federal specification coverage. This specification covers only those sizes of stone forks generally purchased by the Federal Government and is not intended to include all of the sizes that are commercially available.

1.2 Classification.

1.2.1 Sizes. The forks shall be of the following sizes, as specified (see 6.1):

Size 1
Size 2
Size 3

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Federal Specification:
NN-H-81 - Handle, Ash.

Federal Standards:
Fed. Std. No. 102 - Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 151 - Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:
MIL-H-15424 - Hand Tools, Packaging Of.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

(*Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.*)

3. REQUIREMENTS

3.1 Material. Materials used in the construction of forks shall be as specified hereinafter. All materials shall be of uniform quality and free from defects and imperfections that may affect their serviceability or durability.

3.2 Handles. The handle, including the dee, shall be 30 inches long, plus or minus 1/2 inch, and shall be of ash, grade A or B in accordance with Federal Specification NN-H-81.

3.2.1 D-handle. The D-handle shall have a steel tubular dee with a wood grip or spool. The wood handgrip shall be riveted to the sides of the dee and secured either by staking or clip locks to prevent the handgrip from loosening or turning. The steel tubular dee shall be secured to the wood handle with not less than two rivets or four barbed nails. Dimensions for the D-handle shall conform to figure 1.

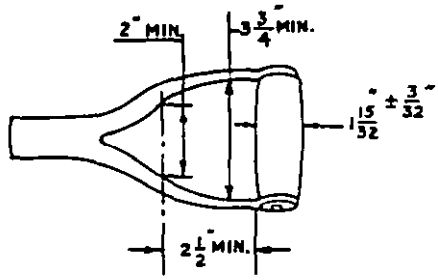


FIGURE 1 - Dimensions for D-handles.

3.3 Tines and shank. The tines and shank shall be forged from high carbon steel and shall be suitable for the purpose intended.

3.4 Hardness. The tines of the fork shall have a hardness of not less than 30 nor more than 35 on the Rockwell C scale.

3.5 Ferrule. A tapered tubular-steel ferrule not less than 10 inches in length shall be provided. The ferrule shall have a minimum wall thickness of 0.042 inch, and the longitudinal seam of the ferrule shall be closed by a continuous weld. The ferrule shall be secured to the handle by at least one rivet or nail.

3.6 Rivets and nails. Rivets and nails where specified herein, for attachment of ferrule or handle, shall be of steel, round or oval head, and not less than 0.122 inch in diameter. When any rivet or nail extends entirely through the opposite side, its end shall be neatly headed.

3.7 Strength. The fork shall show no fracture, breakage, or permanent deflection exceeding 1 inch when tested as specified in 4.4.2.

3.8 Dimensions. The forks shall conform to the dimensions specified in table I.

TABLE I. Dimensions

Size	Length of tine ± 1/4 inch	*Width of fork ± 1/4 inch	Tine Spacing
	Inches	Inches	
1. . . . . 8 Tine	13-1/2	10-1/2	1-1/8
2. . . . . 10 Tine	13-1/2	9-3/4	3/4
3. . . . . 12 Tine	13-1/2	11-1/2	3/4

* NOTE: The overall width of the fork shall be measured at mid-point of the tine length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

3.9 Identification marking. The fork shall be marked in a legible and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacturer may be readily determined.

3.10 Finish of metal parts. All exposed metal parts shall be coated with a durable paint, enamel, or lacquer.

3.11 Handle finish and coating. All portions of the handle shall be smoothly finished and adequately covered with two durable coats of clear lacquer or varnish or one coat after surface treatment utilizing heat, such as flame treating or charring. The coating shall be applied in such a manner to permit visual inspection of the wood and to prevent absorbtion of water. The wood grip of steel tubular D-handles may be coated with pigmented lacquer.

3.12 Workmanship. Workmanship shall be of the highest quality throughout and in accordance with good commercial practice. Forks shall be free from any imperfections that may affect their serviceability or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table II.

TABLE II. Sampling Data

Category	Sample Unit	Inspection Level	Acceptable Quality Level	AQL Expressed In Terms Of	Reference	
Visual examination	1 ea.	S-3	2.5	Defects per hundred units	4.3.1	
Dimensional examination	1 ea.	S-3	2.5	Defects per hundred units	4.3.2	
Testing	1 ea.	S-3	2.5	Defects per hundred units	4.4	
Preparation for delivery	One container	S-2	4.0	Defects per hundred units	4.5	

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking. Defects are listed in table III.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:41Z
Check the source to verify that this is the current version before use.

TABLE III Classification of defects

Examine	Defects
Design	Any characteristic not in compliance with specified requirements.
Construction and workmanship, general	Any part missing, or not specified type or size.
	Any part fractured, split, punctured, dented, bowed, sprung, malformed, decayed, or otherwise impaired
Finish	Not finished as specified.
	Finish wet or tacky.
	Annual rings concealed.
	Coating on wooden handles not fast (discolors user's hands).
Marking	Missing, incomplete, illegible, or not permanent.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 and 4.4.2.

4.4.1 Hardness. The hardness of alternate tines shall be measured at one point midway in the length of the tine to determine compliance with 3.4. Determinations shall be conducted in accordance with method 243.1 of Fed. Test Method Std. No. 151.

4.4.2 Fork strength. The fork shall be tested as follows to determine compliance with 3.7. The tines shall be clamped as illustrated in figure 2 with the longitudinal axis of the handle approximately 45 degrees to a horizontal plane. A measurement of the vertical distance "A" shall be taken. A weight of 150 pounds shall be attached to the handgrip and allowed to remain for not less than 120 nor more than 125 seconds, after which the weight shall be removed and distance "A" remeasured. The difference in distance "A" measurements is the amount of set or bend.

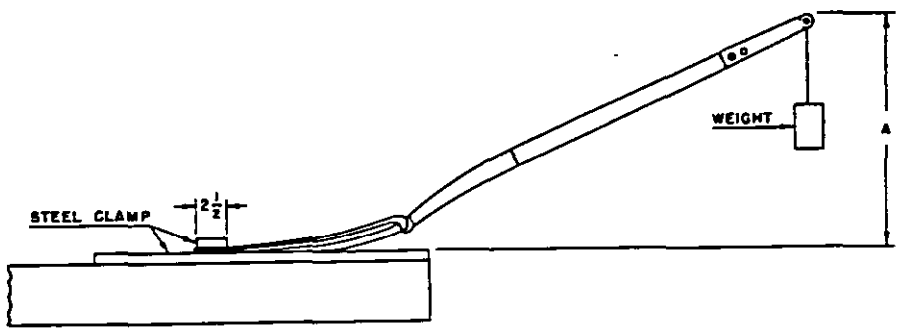


FIGURE 2 - Fork Strength Test

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table IV. For examination of interior packaging the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

TABLE IV - Classification of preparation for delivery defects

Examine	Defects
Markings (exterior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.
Contents (exterior)	Number per container is more or less than required. Net weight exceeds requirements.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.1) the forks shall be preserved, packaged, and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C and the level of packing A, B, or C as specified (see 6.1).

5.1.1 As part of the requirements, section 5 of this specification, the following is considered as part of table I of MIL-H-15424:

COLUMN 1	COLUMN 2	COLUMN 3	COLUMN 4	COLUMN 5	COLUMN 6	COLUMN 7
Fork:						
Stone, D-handle	NONE	III	---	---	6	6

5.2 Marking.

5.2.1 Civil agencies. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military activities. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options offered herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.

(b) Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

(c) Size required (see 1.2).

(d) Marking, if different (see 5.2).

GSA-FSS DC 88-14016
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.