GGG-O-591F
May 16, 1977
SUPERSEDING
GGG-O-591E
June 5, 1962

FEDERAL SPECIFICATION

OILER, HAND

This specification was approved by the Commissioner, Federal supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers oilers of various types for use in ejecting oil under pressure, gravity, or a combination of both.

1.2 Classification.

1.2.1 Types, classes, and styles. The oilers covered by this specification shall be of the following types, classes, and styles as specified (see 6.2):

Type I - Push-bottom, steel.

Class A - With machine-cut threads.
Class B - With rolled threads or other similar connection.

Type II - Pump.

Class A - With handle and lever-operated pump.

Style 1 - Rigid spout.
Style 5 - Flexible spout.

Class B - Without handle.
Class C - With handle and plunger-operated pump.

Style 2 - Bent spout.
Style 3 - Curved spout.
Style 4 - Plexible spout.

FSC 4930

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

Type III - Filler.
Type IV - Rectangular, push sides.
Type V - Typewriter (see 3.15).

Style 1 - Oval shape.
Style 2 - Cylindrical shape.
Style 3 - Hemispherical shape.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specification:

PPP-P-40 - Packaging and Packing of Hand Tools.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington DC, 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications, and Standards, required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Bureau of Standards Handbook:

H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

Society of Automotive Engineers, Inc., (SAE):

J300 - Crankcase Oil Viscosity Classification.

(Applications for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations used herein are for the convenience of identification and are not intended to preclude the purchase of oilers which are otherwise in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), the supplier shall furnish one oiler of each type, class, and style specified for first article inspection and approval (see 4.2.1 and 6.3). The first article may be a standard production item from the supplier's current inventory provided the oiler meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining oilers to be furnished under the contract.

3.3 Material. All material shall be new and unused. All material shall be as specified herein. Material not specified shall be of the same quality used for the intended purpose in commercial practice. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual component or the overall assembly.

3.4 Washers. Washers, if necessary for proper operation of the oilers, shall be furnished. The washers shall be impervious to oil and shall have adequate oil-sealing qualities.

3.5 Marking. Each oiler shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.6 Finish. Type I, class A oilers shall be either polished or copper plated and finished with a coat of lacquer or varnish. Type II, class C oilers shall be finished by zinc plating, a coat of oil-resistant enamel, or coated with metal powder (aluminum, brass, or bronze) in an enamel oil base and baked. All other types and classes of oilers shall be polished, brass or copper coated, brass or copper plated, with a coat of clear lacquer or varnish, or lacquered with an opaque lacquer or nickel plated. When the basic metal used to fabricate oilers is corrosion resistant, no further coating will be required. If lacquer, varnish, or enamel are used for the final coating they shall be oil resistant and shall not adversely affect the surface to which applied. All metal, regardless of type of treatment, shall be free of foreign matter which might adversely affect coating adhesion.

3.6.1 Polished and clear-lacquered finish. Polished and clear-lacquered finish, when examined under normal illumination without magnification, shall be a polished-surface finish, free from drawing scratches or other objectionable marks. The polished surfaces shall be completely coated with a clear transparent lacquer. The lacquer shall not be tacky, shall not adversely affect the material coated, and shall be suitable for the prevention of rust.

3.6.2 Polished, brass or copper coated, or brass or copper plated, and lacquer finish. Polished, brass or copper coated, or brass or copper plated, and lacquered finish shall be a polished or otherwise suitably

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

finished surface, free from drawing scratches or other objectionable marks that might appear through the brass or copper plating or coating. Unless otherwise specified in the contract, the brass or copper plating or coating may be applied by an electro or other similar deposited method (see 6.2). The copper plating or coating shall have adequate corrosion-resistant properties. The brass or copper plating, unless applied by an electrostatic spray method shall be coated with a clear transparent lacquer. The lacquer shall not be tacky and it shall not adversely affect the copper plating.

3.7 Construction. The oilers shall be complete so that they can be used for the purpose intended.

3.7.1 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function.

3.7.2 Welding, brazing, or soldering. Welding, brazing, or soldering shall be in accordance with good commercial practice. In no event shall such processes, including plugging and peening, be used for reclaiming any defective parts of the oilers.

3.7.3 Fastening devices. If fastening devices are used, such as screws, bolts, nuts, pins, and similar parts they shall be installed in a manner to prevent loss of tightness and adjustment. All such parts when subject to removal or adjustment shall not be swaged, peened, staked, or otherwise permanently deformed.

3.7.4 Military standard parts. For Military purchases, Military standard parts shall be used where applicable. In the event that Military standard parts are not available, commercial utility parts, screws, nuts, or bolts may be used provided they conform to the requirements of this specification.

3.8 Type I, class A, push-bottom steel oilers with machine-cut threads. Type I, class A oilers shall be similar to figure 1 and shall consist essentially of a body, washer as specified in 3.4, and a spout. The spout and body shall be connected by means of machine-cut threads in both parts. Material thicknesses and dimensions shall be in accordance with table I for the size specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

Table I. Type I, class A, push-bottom steel oilers with machine-cut threads

Size, nominal	A diameter		B height		C wall thickness	D bottom thickness	Capacity
	Minimum	Maximum	Minimum	Maximum	Minimum	Minimum	Minimum
Pint	Inches	Inches	Inches	Inches	Inch	Inch	Fluid oz
1/3	3	4	2	3	0.022	0.012	5
1/2	3	4	2	3-1/2	.022	.012	8
3/4	3	5	2	4	.022	.014	10
1	3-1/2	5-1/2	2	4	.022	.014	16

3.8.1 Body. The body for type I, class A oilers shall consist of a one-piece, seamless, cold-rolled steel, drawn top section and a spring-action bottom. The drawn top section and bottom shall be securely fitted to each other and shall form a strong and leak-proof joint. The body shall have an opening in the top of not less than 3/4-inch diameter. This opening shall be either fitted with a solid-brass collar or the top part of the body opening shall be reinforced with a solid-metal neck in a manner to prevent weakening connections when the threads are cut.

3.8.2 Spouts. Type I, class A oiler spouts shall be of cold-rolled steel and shall be furnished in lengths of 4, 6, 9, or 12 inches as specified (see 6.2). If no spout length is specified, spouts 4 inches long shall be furnished for the 1/3- and 1/2-pint oilers and spouts 6 inches long for the 3/4- and 1-pint oilers. Spouts shall be either straight or bent, as specified (see 6.2). The spout shall be fitted with a solid-brass bushing having machine-cut threads suitable for engagement in the threaded opening of the body. The spout seam shall be welded, brazed, or silver soldered. Lead-tin solders are not acceptable. The fitting of the collar and spout shall afford a strong and leakproof joint.

3.9 Type I, class B push-bottom steel oilers with rolled threads or other similar connection. Type I, class B oilers shall be similar to figure 2 and shall consist essentially of body, washer as specified in 3.4, and a spout. Unless otherwise specified (see 6.2), the body and spout shall be connected by bayonet type, rolled threads, or a similar connection on both parts. The oilers shall be in accordance with table II for the size specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

Table II. Type I, class B, steel push-bottom oilers with rolled threads or other similar connection

Size	A Diameter		B height		C wall thickness	D bottom thickness	Capacity
nominal	Minimum	Maximum	Minimum	Maximum	Minimum	Mimimum	Minimum
Pint	Inches	Inches	Inches	Inches	Inch	Inch	Fluid oz
1/2 oz	1-1/2	2-1/2	1	2	0.012	0.010	1/2
1 oz	1-1/2	2-1/2	1	2	.015	.010	1
1-1/2 oz	2	3	1	2-1/2	.015	.010	1-1/2
1/3 pt	3	4	2	3	.017	.010	5
1/2 pt	3	4	2	3-1/2	.017	.010	8
3/4 pt	3	5	2	4-1/4	.018	.010	10
1 pt	3-1/2	5-1/2	2	4-1/4	.018	.010	16

3.9.1 Body. The body of type I, class B oilers shall consist of a one-piece seamless cold-rolled steel top section and a spring-action bottom. The top section and bottom shall be securely fitted to each other with a strong and leakproof joint. Oilers of 1-1/2 ounce capacity and smaller shall have an opening in the top of the body of not less than 1/2-inch diameter and oilers larger than 1-1/2 ounce capacity shall have an opening of not less than 3/4-inch diameter. Rolled threads or other similar connection shall be provided at the top of the body to receive the spout.

3.9.2 Spouts. Spouts for type I, class B oilers shall be of cold-rolled steel and shall be 1-7/8 to 4-3/8 inches long for oilers of 1-1/2 ounce capacity and less, and in lengths of 3 to 9 inches for oilers larger than 1-1/2 ounce capacity, as specified (see 6.2). If no spout length is specified, spouts 5 inches long shall be furnished for 3/4- and 1-pint oilers and spouts 3 inches long for smaller-sized oilers. Spouts shall be either straight or bent, as specified (see 6.2). The spout shall be fitted with a cold-rolled steel cap having bayonet type, rolled threads or other similar connection to fit the mating connection on the body. The spout seam shall be welded, silver soldered, or brazed. Lead-tin solders are not acceptable. The fitting of the cap and spout shall afford a strong and leakproof joint.

3.10 Type II, class A pump oilers with handle and lever-operated pump. Type III, class A oilers shall be similar to figure 3 and shall consist essentially of a body, a washer as specified in 3.4, handle, spout, and a pump. The body, handle, and spout shall be of cold-rolled steel. The pump shall be easily removable from the can. The oilers shall comply with the requirements of table III for the size specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

Table III. Type II, class A, pump oilers with handle and lever-operated pump

Size nominal	A diameter		B height		Capacity
	Minimum	Maximum	Minimum	Maximum	Minimum
Pints	Inches	Inches	Inches	Inches	Fluid oz
3/4	3	4	3	5	10
1	3	4	3	5	14
1-1/2	3	4-1/2	4	6	24
2	3-1/2	5	5	7	32
4	4	6	6	8	60

3.10.1 Body. Bodies shall be provided with a top section either of drawn or fabricated seam construction having welded, brazed, or silver soldered seams and shall be not less than 0.018-inch thick for the 1- and 1-1/2 pint size and not less than 0.025 inch thick for the 2-pint size. Lead-tin soldered seams will be acceptable, provided the soldered seams are at least 1 inch from the bottom of the can. The bottom shall be securely fitted to the top section to afford a strong and leakproof joint. The body shall have an opening of the top not less than 1-inch diameter with threads or other similar connection for receiving the pump unit. Bottom shall be connected to the top section by double-locked seam, or of drawn construction provided it extends at least 1 inch up the side of the can.

3.10.2 Pump. The pump shall be self-priming and shall function in any position with 8, 10, 20, or 30 grades of oil or any similar grades that will flow and are ordinarily used for lubricating purposes. The pump parts shall be of metal construction, linear polyethlyene, or equivalent (see 4.6.2). The pump shall be operated by a conveniently located lever. The pump shall be capable of removing at least three-fourths of the oil contents of the can without its being tilted from the normal upright position.

3.10.3 Handle. The handle stock thickness shall be not less than 0.032 inch and the edges shall be rolled back at least 180°, or otherwise suitably reinforced, or shall be made of flat strip, with rounded edges, not less than 0.062-inch thick.

3.10.4 Style 1, rigid spout. Style 1, rigid spouts shall be 4 to 6, 7 to 11, or 12 to 18 inches long, as specified (see 6.2). If no spout length is specified, the 6-inch spout shall be furnished. Rigid spouts shall be seamless or have a welded silver soldered, or brazed leakproof seam and shall be not less than 0.017-inch thick. Tin-lead solders will not be acceptable. The spout shall be readily detachable and joined to the pump unit by bayonet-type joint, a threaded joint, or other

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

suitable connection. Spouts shall be either straight, bent at the vent end, or angled at the base and bent at the vent end, as specified (see 6.2). The bend or angle and bend shall be in the opposite direction from the handle for offset filling. The spout and bushing or fitting shall be joined by commercial solder, silver-solder, or brazed or special epoxy compound forming a strong and leakproof joint.

3.10.5 Style 5, flexible spout. Style 5, flexible spouts shall be 7, 13, 15, or 18 inches long, as specified (see 6.2). If no spout length is specified, the 7-inch length shall be furnished. Plexible spouts shall be detachable with a bayonet-type joint or a threaded bushing or fitting at the base end for connecting to the adapter in the discharge and cap of the oiler. The spout fittings shall be standard thread types. The flexible steel tubing of the spout shall be asbestos lined flexible steel tube with brass or steel bushings or fittings. Spout and bushings or fittings shall be joined by commercial solder, silver-solder and brazed, or special epoxy compound forming a strong and leakproof joint. The discharge end spout bushing shall be either a tapered nozzle, a straight ferrule, or a threaded fitting type for attaching hollow wire, needle, or brush tip extensions. The flexible spout shall be suitable in all respects for reaching locations that would otherwise be inaccessible (see figure 8). The outside diameter (od) of tubing shall be not less than 1/4 inch and the inside diameter (id) shall be not less than 3/16 inch.

3.11 Type II, class B, pump oilers without handle. Type II, class B, oilers (known commercially as pistol-grip oilers) shall be similar to the optional designs shown in figure 4 and shall be suitable for delivering either a drop or stream of oil, as wanted. The oiler shall be designed and constructed to operate satisfactorily at any temperature from -40° to +125° Fahrenheit (F), and withstand storage temperatures between -80° to +160°F (see 4.6.1.3). The body shall afford a comfortable handgrip. These oilers shall consist essentially of a body, a washer as specified in 3.4, a spout, and a pump. The body and spouts shall be of metal construction. Oilers with screw on caps shall have the caps manufactured of nylon, polypropylene, or metal. The oilers shall be in accordance with table IV for the size specified (see 6.2).

Table IV. Type II, class B, pump oilers without handle

Size,	A diameter*		B height		Capacity	
nominal	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
Pints	Inches	Inches	Inches	Inches	Fluid oz	Fluid oz
1/4	1-1/2	2-1/8	3-1/2	5-1/4	4	6
1/2	1-1/2	2	4-1/2	8	6	10
1	1-1/2	2-1/2	5-1/2	10	16	22
2	1-1/2	2-1/2	8	11	28	36

*Note: The maximum diameter applies to the hand grip area. A larger base diameter may be furnished if the base is of the flared design (see optional designs in figure 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.11.1 Body. The top section of the body shall be either one piece or of fabricated construction. Welding, silver soldering or brazing of seams is permissible but lead soldering is not permissible unless the soldered seam is at least 1 inch from the bottom of the cap. The metal in the top section and the bottom of the body shall be at least 0.015-inch thick.

3.11.2 Pump. The pump shall be self-priming and shall function properly at a temperature of -40° to +125°F. The pump shall function properly in any position with any oil of 8 or 10 grade that will flow readily and is ordinarily used for lubricating purposes. The structural parts of the pump shall be of metal, linear polyethylene, or equivalent (see 4.6.2). Unless otherwise specified in the contract or order, the pump shall be operated by a conveniently placed lever or a plunger with button head. The pump shall be capable of removing at least 90 percent of the oil contents of the can without its being tilted from the normal upright position.

3.11.3 Spout. The spout shall be seamless or shall have a welded, silver soldered, or brazed seam and shall be not less than 0.020-inch thick. Unless otherwise specified in the contract, the outer end of the spout shall be fitted with a suitable cone-shaped nozzle. The length of the spout, including the nozzle fitting, shall be not less than 3 inches for 1/4-pint size, 4 inches for 1/2-pint size, and 6 inches for 1-pint size and larger. Unless otherwise specified in the contract or order, the spout shall be either bent or straight. When specified (see 6.2), the oiler shall be furnished with an adapter and spray nozzle.

3.12 Type II, class C pump oilers with handle and plunger-operated pump. Type II, class C oilers shall be similar to figure 5 and shall consist essentially of a body, top cap, bottom cap or spout, piston, piston rod, handle, and spout. When assembled and filled with oil, the pump shall be capable of withstanding a pressure of 25 pounds (lb) applied to the pump handle without leakage at joints or past the piston. Oilers shall conform to table V for the size specified (see 6.2). They shall be designed to supply lubricants or similar liquids by force feed to gear cases, shock absorbers, track suspension systems, brake fluid master cylinders, and may be used as a suction pump. All parts subject to wear, breakage, or distortion shall be readily accessible for adjustment and repair.

Table V. Type II, class C, pump oilers with handle and plunger-operated pump

Gun (length) (minimum)	Capacity (minimum)
Inches	Ounces
10	6.0
15	11.0
18	20.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.12.1 Body. The body shall be cylindrical in shape, not less than 1-1/2 inches or more than 2-1/2 inch od, of the length and capacity shown in table V, and as specified (see 6.2). The handle end of the body shall be provided with screw-type cap to permit the withdrawal of the piston for disassembly. The other end of the body shall be provided with a screw-type or welded-on-type cap, or swaged body provided with female pipe threads for attachment of the spouts. The wall of the body shall be not less than 0.0475 inch in thickness. The internal surface of the body shall be smooth to minimize wear on the "O" ring or piston cups. The outside central portion of the body shall be either continuously or interruptedly knurled for a minimum of 3-1/2 inches in length.

3.12.2 Caps. Caps shall be threaded to fit the body, and arranged to provide leakproof joints. They shall be knurled on the outside periphery. A vent hole shall be provided in the cap at the piston end of the oiler if required for proper operation of the oiler. If a vent hole is used, it shall be approximimately 1/8 inch in diameter and the piston hole shall be suitably reinforced with a projection or by other suitable method. The bottom caps shall have a spout connection of either 3/8 inch 18 NPSC external threads or 1/4 inch 18 NPT internal threads, as specified (see 6.2), in accordance with the applicable requirements of NBS H28.

3.12.3 Piston and piston rod. The piston shall be of the flexible rubber "O" ring or cup type, fabricated from material that resists deterioration when subjected to prolonged contact with petroleum base and synthetic oils. The seals and sealing cups shall be replaceable and shall be so constructed as to seal against leakage at 25 pounds per square inch (psi) pressure of SAE 10W oil; the piston-rod diameter shall be not less than 0.300 inch.

3.12.4 Handle. A handle suitable in all respects for operating the piston shall be provided. The handle shall be smooth-finished hardwood, metal, or plastic. The handle shall be as shown in figure 5 or of the type in which the centerline of the handle at its midpoint, and at right angles to it (including type known commercially as spade type), or of the solid piston-grip type. When the piston is at the end of the discharge stroke, the clearance between the inner grip surface of the handle and the body shall be not less than 7/8 inch.

3.12.5 Gaskets. Gaskets of cork or other suitable material shall be provided for the end caps and spout connection, where required, to prevent leakage under any test and operating conditions.

3.12.6 Style 2, bent spout. Style 2, bent spout shall be made of welded or seamless tubing. It shall either be bent at right angle (each leg of angle being not less than 6 inches in length) or in the form of a gooseneck with an overall length of not less than 11 inches. The end of the spout shall be not less than 1/4 inch. The id of the spout shall be not less than 3/16 inch (see figure 6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.12.7 Style 3, curved spout. Style 3, curved spout shall be made of welded or seamless tubing. It shall be curved on a 1-1/2 inch minimum radius so that the curved end is offset from the centerline of the piston at its extremity and shall be not less than 3-5/8 inches in length with tip attached (see figure 7). A tip or nozzle shall be fitted at the outer end of the spout. The tip shall be either tapered to approximately 1/4-inch diameter at the small end or it shall be straight and not more than 5/8-inch od. The id of the tip shall be not less than 3/16 inch.

3.12.8 Style 4, flexible spout. Style 4, flexible spout shall be made of flexible-steel tubing. It shall be not less than 12 inches in length, and shall be suitable in all respects for reaching locations that would otherwise be inaccessible (see figure 8). Each end of the tubing shall be provided with a fitting securely fastened in place. The fitting on one end shall be threaded for attachment to discharge end cap of the oiler. The fitting on the other end shall be either a tapered nozzle or a straight ferrule. The od of the spout shall be not less than 1/4 inch and the id shall be not less than 3/16 inch.

3.12.9 Temperature. When specified (see 6.2), the oilers shall be so designed as to function between -40° to +125° F, and withstand storage temperatures between -80° to +160°F without harmful effects (see 4.6.1.3).

3.12.10 Filling. The cylinder of the oiler shall be capable of being filled to within 85 percent of the capacity with lubricating oil by a single stroke of the piston.

3.13 Type III filler. Type III filler shall be similar to figure 9 and shall be made of either cold-rolled steel or copper, as specified (see 6.2), and shall consist essentially of a one-piece seamless body with attached bottom, handle, spout, cap, and chain. Fillers shall comply with the requirements of table VI for the size specified (see 6.2).

Table VI. Type III, fillers

Size,	A diameter		B height		C spout length		Capacity
nominal	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum
Pints	Inches	Inches	Inches	Inches	Inches	Inches	Fluid oz
1	4	5	3	4	4	6	14
2	4-1/8	6	4	5-7/8	5-1/2	8	30
4	5-1/4	7	5	6-5/8	5-1/2	8	56

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.13.1 Body. The metal composing the top section and bottom of the body shall be not less than 0.025-inch thick. The top and bottom shall be joined securely to afford a strong and leakproof construction. A bushing shall be provided in the top of the body to be threaded for securing the cap.

3.13.2 Spout. The joint between the spout and body and all seams shall be welded, silver soldered, or brazed. Tin-lead solders will not be acceptable. Spout material shall be not less than 0.031-inch thick. The orifice at the outer end of the spout shall be not less than 1/4 inch in diameter. Unless otherwise specified in the contract, the spout shall be bent.

3.13.3 Cap and chain. The cap shall be made of either steel or brass bayonet-type joint, rolled threads, or machine-cut threads for properly engaging the bushing in the body. The cap shall be attached to the handle by means of a chain.

3.14 Type IV, rectangular push sides. Type IV oilers shall be similar to figure 10 and shall consist essentially of a rectangular body, two washers as specified in 3.4, and a spout. The body and spout shall be of cold-rolled steel not less than 0.020-inch thick. The design shall be such that the spout may be attached in the conventional manner for dispensing oil or inverted and screwed into the body for storage. The oiler shall be leakproof regardless of the position of the spout. The oilers shall comply with the requirements of table VII.

Table VII. Type IV, rectangular, push sides

Size, nominal	A width Minimum	B height Minimum	C thickness Minimum	Capacity Minimum
Pint	Inches	Inches	Inches	Fluid oz
3/4		6-1/2	1-1/4	12

3.14.1 Body. Portions of two of the vertical sides of the body shall be convex in a manner to eject oil from the oiler when pushed and to return to normal position when pressure is released. The opening in the top of the body shall be not less than 3/4 inch in diameter and shall be provided with an all metal bushing that is threaded to receive the threaded portion of the spout. Soldered seams are permissible in this type oiler.

3.14.2 Spout. The orifice at the outer end of the spout shall be not less than 0.060 $\pm$0.005-inch diameter. The small end of the spout shall be provided with a cap attached by a leakproof threaded connection and be readily detachable. The large end of the spout shall be provided with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

an externally threaded sleeve having a knurled retainer containing two washers (see 3.4), one on each side of the knurled portion. The knurled retainer shall be located midway between the two threaded ends of the sleeve so that either end of the sleeve may be screwed into the can opening. The spout shall be straight.

3.15 Type V typewriter oilers. Unless otherwise specified (see 6.2), the typewriter oilers shall be any of the following styles: Style 1, oval shape (see 3.15.1 and figure 11), style 2, cylindrical shape (see 3.15.2 and figure 12), or style 3, hemispherical shape (see 3.15.3 and figure 13.) The oilers shall be capable of discharging oil, as applicable to the style(s) specified.

3.15.1 Style 1. Type V, style 1, oval shape, typewriter oilers shall be similar to figure 11 and shall consist essentially of a body, a washer as specified in 3.4, a spout, and a spout cover. The metal shall be not less than 0.008 inch in thickness. The oiler shall be capable of discharging one drop of typewriter oil through the tip end of the spout by tilting or pressing the sides of the oiler with the fingers. It shall be capable of discharging several drops of oil through the tip of the spout by tilting the oiler and gently pressing the sides of the body with the fingers. These oilers shall comply with the requirements of table VIII.

Table VIII. Type V, style 1, oval shape, typewriter oiler

Size, nominal	A width Minimum	B height Minimum	C thickness Minimum	Capacity Minimum
Pint	Inch	Inches	Inch	Fluid oz
1/32	1	3-3/16	9/16	1/2 ± 1/16

3.15.1.1 Body. Portions of two of the vertical sides of the body shall be convex in a manner to eject oil from the oiler when pushed and to return to normal position when pressure is released. Failure to return to normal position will be considered as failure to meet specification requirements. The opening in the top of the body shall be not less than 3/8 inch in diameter and shall be provided with an all metal collar that is threaded to receive the threaded portion of the spout and the threaded portion of the spout cover. All seams shall be soldered to make them leakproof.

3.15.1.2 Spout. The orifice at the outer end of the spout shall be not less than 1/16 inch in diameter. The spout shall be not less than 1-inch long. The large end of the spout shall be threaded for insertion in the threaded portion of the body. The spout shall be straight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.15.1.3 Spout cover. The spout shall be provided with a cap or cover which shall prevent leakage, when in place. Attached to the inside of the cover shall be a pointed-spout cleaning wire so arranged that when the cover is screwed in place the cleaning wire shall extend inside the spout, or a neoprene plug shall be inserted in the inside of the extreme top of the cover, so located that when the cover is screwed into place the spout will press into the neoprene plug insuring a tight fit and prevent leaking. The open end of the cover shall be threaded for insertion in the threaded portion of the body. The spout cover shall have a knurled ring around it to provide a good gripping surface when inserting or removing the cover from the body of the oiler.

3.15.2 Style 2. Type V, style 2, cylindrical shape, typewriter oilers shall be similar to figure 12 and shall consist essentially of a body, a washer as specified in 3.4, a spout, and a spout cap. The metal shall be not less than 0.010 inch in thickness. The oiler shall be capable of discharging either one drop or several drops of oil through the tip of the spout by gently pressing the bottom of the oiler. These oilers shall comply with the requirements of table IX.

Table IX. Type V, style 2, cylindrical shape, typewriter oiler

Size	A diameter	B height	Capacity
nominal	Minimum	Minimum	Minimum
Pint	Inch	Inches	Fluid oz
1/32	7/8	4-1/2	1/2 + 1/4 -0

3.15.2.1 Body. The body of the oiler shall be cylindrical in shape and at the option of the supplier may be either straight or stepped as shown in figure 13. The opening in the top of the body shall be not less than 1/4 inch in diameter. The top of the body shall be threaded for assembly of the spout. The bottom shall be of the push-bottom type. The bottom, when pressed, shall return to normal position when pressure is released. Failure of the bottom to return to normal position will be cause for rejection. Seams shall be leakproof. Nonmetallic filling of seams is not acceptable.

3.15.2.2 Spout. The orifice at the outer end of the spout shall be not less than 0.025 inch in diameter. The spout shall be not less than 1-3/4 inches long. The large end of the spout shall be threaded for assembly on the body. The tip or small end of the spout shall be threaded for assembly of the spout cap. The spout shall be straight.

3.15.2.3 Spout cap. The tip end of the spout shall be provided with a threaded brass cap which shall prevent leakage when in place. The periphery of the spout cap shall be fine knurled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

3.15.3 Style 3. Type V, style 3, hemispherical shape oilers shall be similar to figure 13 and shall consist essentially of a body, a washer as specified in 3.4, a spout, and a spout cap as specified in 3.15.2.3. The metal shall be not less than 0.010 inch in thickness. The oiler shall be capable of discharging either one drop or several drops of oil through the tip of the spout by gently pressing the bottom of the oiler. These oilers shall comply with the requirements of table X.

Table X. Type V, style 3 hemispherical shape, typewriter oiler

Size	A diameter	B height	Capacity
nominal	Minimum	Minimum	Minimum
Pint	Inches	Inches	Fluid oz
1/32	1-3/4	2-3/4	1/2 + 1/4 -0

3.15.3.1 Body. The body of the oiler shall be approximately hemispherical in shape as shown in figure 13. The opening in the top of the body shall be not less than 1/2 inch in diameter. The top of the body shall be threaded for assembly of the spout. The bottom shall be of the push-bottom type. The bottom, when pressed, shall return to normal position when pressure is released. Failure of the bottom to return to normal position will be cause for rejection. Seams shall be leakproof. Nonmetallic filling of seams is not acceptable.

3.15.3.2 Spout. The spout shall conform to 3.15.2.2 except the spout shall be not less than 1-1/4 inches long.

3.16 Workmanship.

3.16.1 Steel fabrication. Steel used in the fabrication of equipment shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the metal. Shearing and chipping shall be done neatly and accurately. All bends of a major character shall be made with controlled means in order to insure uniformity of size and shape.

3.16.2 Bolted connections. Bolt holes shall be accurate and true, and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.16.3 Welding. Surfaces to be welded shall be free from foreign matter which would be injurious to the weld. Welding procedures shall be in accordance with a nationally recognized code. Welds shall be of sufficient size and shape to develop the full design strength of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

parts connected by the welds. Welds shall transmit imposed stresses without permanent deformation or failure when subject to proof or service loadings.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.2.1).
(b) Quality conformance inspection (see 4.2.2).
(c) Preparation for delivery inspection (see 4.7).

4.2.1 First article inspection. First article inspection shall be performed on one oiler when a first article sample is required (see 3.2). This inspection shall include the examination of 4.5 and the tests of 4.6. The first article may be a standard production item from the supplier's current inventory provided the oiler meets the requirements of this specification and is representative of the design, construction, and manufacturing technique applicable to the remaining oiler to be furnished under the contract.

4.2.2 Quality conformance inspection. Quality conformance inspection shall be performed on the sample oiler selected in accordance with 4.4. This inspection shall include the examination of 4.5 and the test of 4.6.

4.3 Inspection lot. All units of the same type, class, and style offered to the Government at one time, shall be considered a lot for purposes of inspection. The sample unit shall be one complete oiler.

4.4 Sampling. A random sample of oiler shall be selected from each lot in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4.4.1 Sampling for examination. Examination of the oiler shall be based on inspection level II, and an Acceptable Quality Level (AQL) of 1.5 percent defective.

4.4.2 Sampling for tests. Tests of the oilers shall be based on inspection level S-4 and an AQL of 2.5 percent defective.

4.4.2.1 Frequency of temperature tests, type II, class B and C oilers. Unless otherwise specified (see 6.2), tests specified in 4.6.1.3 shall be conducted on the first lot produced and thereafter upon change in design, material, or location of manufacturer.

4.4.2.2 Certification, subsequent lots. When the tests described in 4.6.1.3 are not required on subsequent lots the manufacturer, or his responsible official, shall certify in writing to the contracting officer, or his authorized representative that the type II, class B and C oilers conform to the test requirements of 4.6.1.3. Each lot offered for delivery, subsequent to the first lot produced shall be so certified.

4.5 Examination. Each sample selected in accordance with 4.4.2 shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the supplier's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements, shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements.

4.6 Tests. Each sample selected in accordance with 4.4.2 shall be tested to determine compliance with this specification. Tests shall be conducted as specified in 4.6.1 through 4.6.4.7.

4.6.1 Type II, class C, pump oilers with handle and plunger-operated pump.

4.6.1.1 Pressure-leak test. The oilers shall be partially filled with oil and held with the discharge end up while the piston is moved to expel all air from the cylinder. When all air is removed, the spout shall be suitably stopped or plugged, and the piston pushed for 15 seconds with a pressure of 25 lb applied to the handle in an attempt to expel the oil. No oil shall leak through or around the piston or at any of the joints as a result of this test.

4.6.1.2 Capacity test. The end of the spout shall be placed in a reservoir of oil and the piston moved through several complete strokes. The final stroke shall be such that the cylinder is empty and the piston

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

is in position to begin the intake stroke. A moderately fast intake stroke shall be taken, and the contents of the cylinder discharged into a separate container. The amount of oil thus discharged shall be considered the capacity of the oiler. Tests shall be conducted in an atomosphere with a temperature of from 70° to 80°F. The testing media for all tests shall be No. 10 oil conforming to SAE J300.

4.6.1.3 Type II, classes B and C, temperature tests.

4.6.1.3.1 High-temperature operational test. The filled oiler shall be heated to a temperature of 125°F. The oiler shall operate satisfactorily at this temperature.

4.6.1.3.2 Low-temperature operational test. The filled oiler shall be chilled to -40°F. The oiler shall operate satisfactorily at this temperature.

4.6.1.3.3 Nonoperational test. The empty oiler shall be heated to 160°F and held at this temperature until saturated, then chilled to -80°F. The oiler shall then be allowed to assume room temperature of 70°F. The oiler shall operate satisfactorily after this temperature cycling.

4.6.2 Type II, classes A and B. Type II, class A and B oilers with linear polyethylene or equivalent pump parts (see 3.10.2 and 3.11.2) shall have at least one pump tested as follows: The oiler shall be placed into a testing device, which by cam action or by similar action against the trigger shall operate the pump at full stroke at the rate of 75 strokes per minute. The reservoir of the testing device shall be filled with lubricating oil which shall be pumped through the oiler and returned to the reservoir by tubing attached to the spout of the oiler. The pump shall be actuated at least one million full strokes and after this test shall operate efficiently in its intended use. A statement signed by a responsible representative of the manufacturer or a signed test report from a recognized testing laboratory that the oilers have passed this test will be accepted as proof of compliance, provided the oilers meet all other applicable tests herein, including the tests in 4.4.1 and 4.4.4.

4.6.3 Type V, typewriter oilers. The testing of this type oiler will be limited to operational test to determine compliance with 3.15.1 thru 3.15.3 as applicable.

4.6.4 All other types of oilers.

4.6.4.1 Pressure test. The sample oilers of welded, brazed or silver soldered joint construction selected for tests shall be subjected to a hydrostatic pressure test of 5 psi for a period of 5 minutes and shall show no evidence of leaking at the seams, joints, threads, or other

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

connections. Oilers of lead-tin solder joint construction shall be tested for leakage but no hydrostatic pressure tests will be required.

4.6.4.2 Spout load test. The oilers shall be subjected to the following spout load test:

(a) Assemble the spout tightly to the body.
(b) Support the body of the oiler with the spout extended in a horizontal plane.
(c) Apply a 75-inch lb load within 1-1/2 inches of the vent end of the spout; as an example, apply a 10-lb load 7-1/2 inches out on the unsupported end of the spout of an oiler with a 9-inch spout. In lieu of using a suspended weight, the same test can be accomplished by holding the oiler body in the hands and applying the pressure on a platform scale with the predetermined load set up on the scale. The seam between the spout cap and the spout or any other seam shall not be opened up after this test and the spout shall not be bent nor show any other signs of permanent deformation.

4.6.4.3 Test of welded seams in the spout construction. A spout from one of the welded seam construction oilers shall be removed and hammered flat for one-half of its length with the seam at the bend, and for the remainder of its length with the bend 90° from the seam, and under this test shall show no evidence of opening of the seam.

4.6.4.4 Test of brazed or soldered seams in the spout construction. A brazed or silver soldered seam type of spout shall be removed from one of the oilers and one 90° bend made with the seam in the middle of the bend, and under this test shall show no evidence of opening of the seams.

4.6.4.5 Welded filler spout test. A welded seam type of spout on one of the fillers shall be hammered, as described in 4.6.4.3 without removal from the filler and shall not open at the seam or separate from the body.

4.6.4.6 Filler handle test. With the handle and bottom rim of the filler supported on an anvil, the handle shall be hammered from the top side until the top and bottom part of the handle are brought within 1/2 inch of each other at 1 inch from the bend. After this test, welded joint of the handle to the body shall show no evidence of opening.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

4.6.4.7 Further uses of samples. The samples used in the spout tests shall be used for checking the thickness of the material in spout, handles, bottom and the body, as specified herein. These samples shall also be used to check the seam, joints, and also the thickness of material at the root of machine-cut threads which shall be at least equal to the thickness of the oiler body. The thickness of material at the root of the threads may include more than one thickness of material provided the layers are welded or brazed into one component.

4.7 Preparation for delivery inspection. The preservation, packaging, packing, and marking of the oiler shall be inspected to verify conformance to the requirements of section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. The preservation and packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. The oilers shall be preserved and packaged in accordance with level A of PPP-P-40.

5.1.2 Level B (civil agencies). The oilers shall be preserved and packaged in accordance with level B of PPP-P-40. The quantity per unit package shall be as specified in the contract or order (see 6.2).

5.1.3 Level C. The oilers shall be preserved and packaged in a manner that will insure adequate protection against deterioration and damage during shipment. This level may conform to the supplier's commercial practice when such meets the requirements of this level.

5.2 Packing. The packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. The oilers shall be packed in accordance with level A of PPP-P-40.

5.2.2 Level B. The oilers shall be packed in accordance with level B of PPP-P-40.

5.2.3 Level C. The oilers shall be packed in a manner which will insure arrival at destination in satisfactory condition and which will be acceptable to the carrier at lowest rates. Packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Military marking. In addition to any special marking required by the contract, unit and intermediate packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Civil agencies. In addition to any special marking specified in the contract, each unit and intermediate package shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use. Oilers are also known as "oil cans", "pistol oilers", "fillers", "trigger oilers", hydraulic oilers", and other similar designations, dependent upon design and construction. Pistol and trigger oilers are classified in this specification as pump oilers without handles. Oilers might be used for lubricating machinery or automotive equipment with any type of oil that will flow, similar to 8, 10, or 20 grade oil, except that pump oilers without handles are generally used for lighter oils such as grades 8 or 10. The filler type is generally used for filling large oil cups on heavy machinery with the heavier oils such as 30 or 30 grade.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following in procurement documents:

(a) Title, number and date of this specification.
(b) Type, class, and style required (see 1.2).
(c) When a first article is required for inspection and approval (see 3.2, 4.2.1, and 6.4).
(d) Copper plating method, if different (see 3.6.2).
(e) Size required (see 3.8, 3.9, 3.10, 3.11, 3.12, 3.12.1, and 3.13).
(f) Length of spout (see 3.8.2, 3.9.2, 3.10.4, and 3.10.5).
(g) Type of spout required (see 3.8.2, 3.9.2, 3.10.4, and 3.11.3).
(h) Type of thread required (see 3.9).
(i) Whether adapter and spray nozzle are required (see 3.11.3).
(j) Type of thread required for type II, class C oiler (see 3.12.2).
(k) Whether the oilers shall be so designed as to function between -40° to +125°F and withstand storage temperatures between -80° to +160°F without harmful effects (see 3.12.9).
(l) Whether the type III filler shall be made of copper or steel (see 3.13).
(m) If a specific style (shape of type V typewriter oiler is required (see 3.15)).
(n) Applicable level of preservation, packaging, and packing (see 5.1 and 5.2).
(o) Quantity in unit package (see 5.1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

6.3 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of paragraph 7-104.9(n) of the Armed Services Procurement Regulation (ASPR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of ASPR 7-104.9(n) are not invoked, the data shall be delivered in accordance with the contract requirements.

6.4 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of paragraph 7-104.55 of the ASPR. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination, tests, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:40Z
Check the source to verify that this is the currentversion before use.

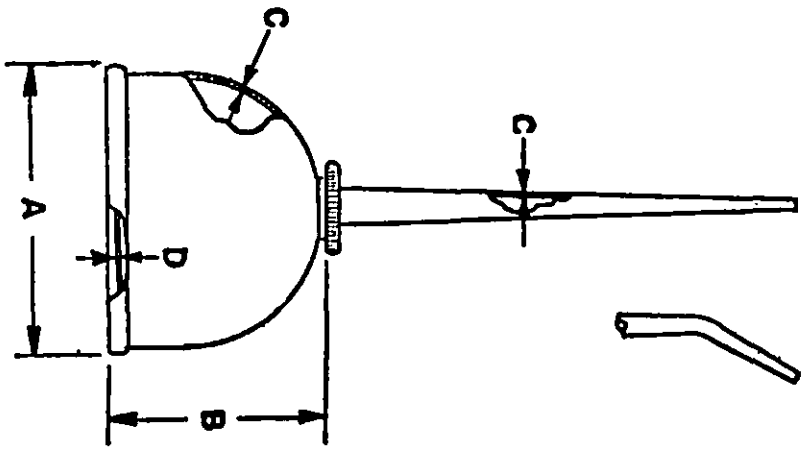


Figure 1. Type I, class A, push-bottom steel oiler with machine-cut threads.

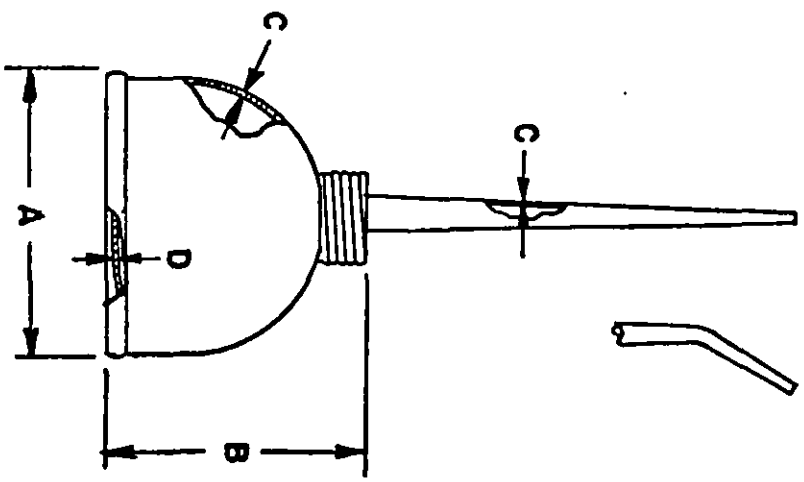


Figure 2. Type I, class B, push-bottom steel oilerwith rolled threads or other similar connection

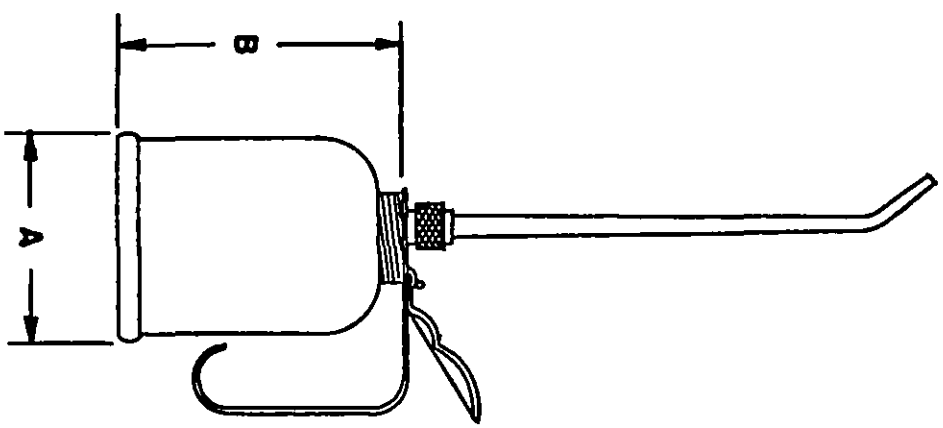
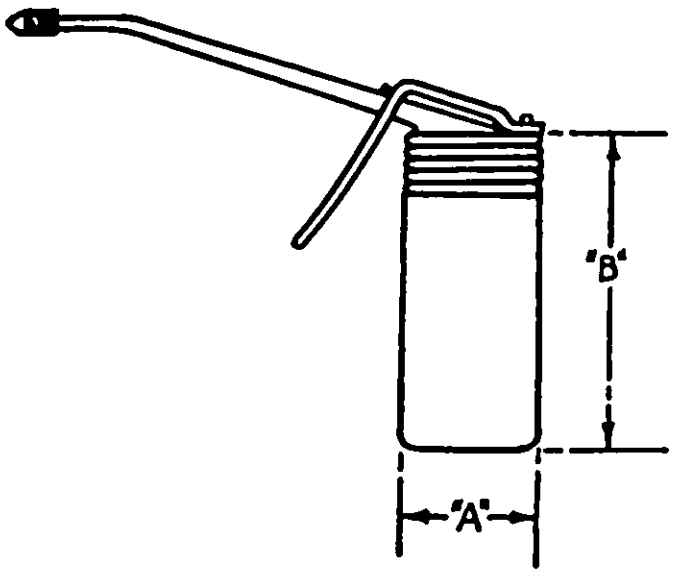


Figure 3 Type II, class A, pump oiler with handle and lever-operated pump

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.



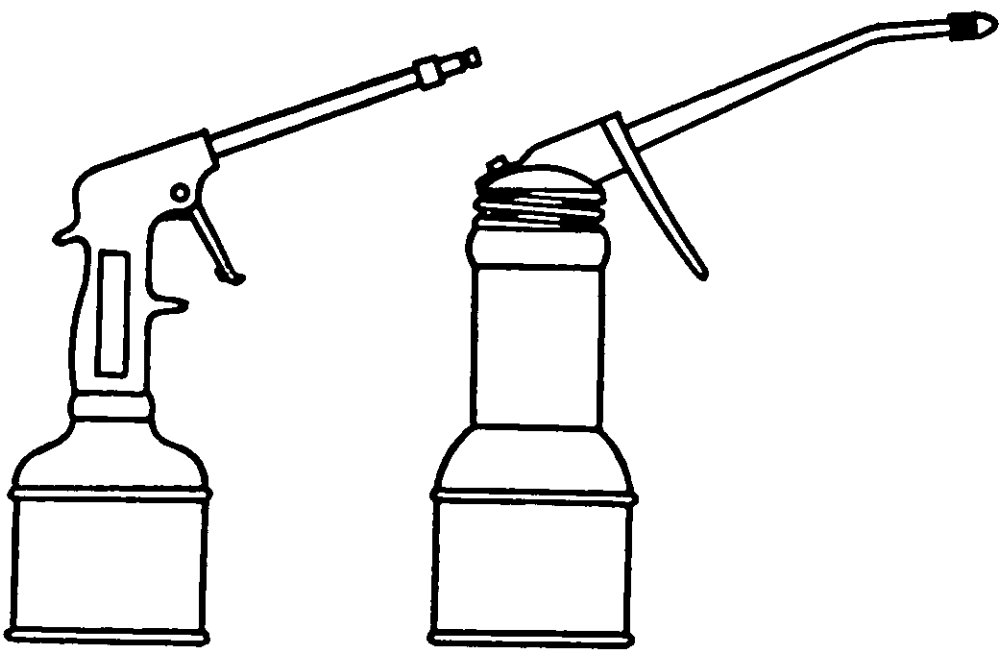


Figure 4 Type II, class B, pump oiler, without handle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

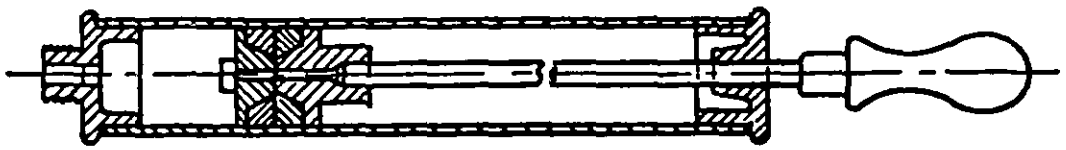


Figure 5 Type II, Class C, pump oiler with handle and plunger-operated pump.

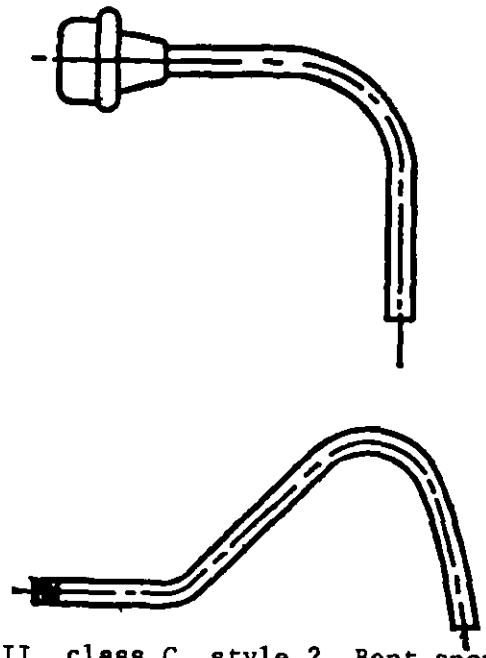


Figure 6. Type II, class C, style 2, Bent spout for pump oilers with handle and plunger-operated pump.



Figure 7. Type II, Class C, Style 3, curved spout for pump oilers, with handle and plunger-operated pump.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

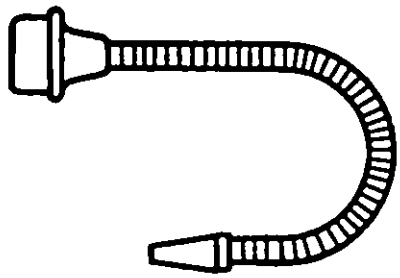


Figure 8. Type II, class C, style 4, flexible spout for pump oilers, with handle and plunger-operated pump.

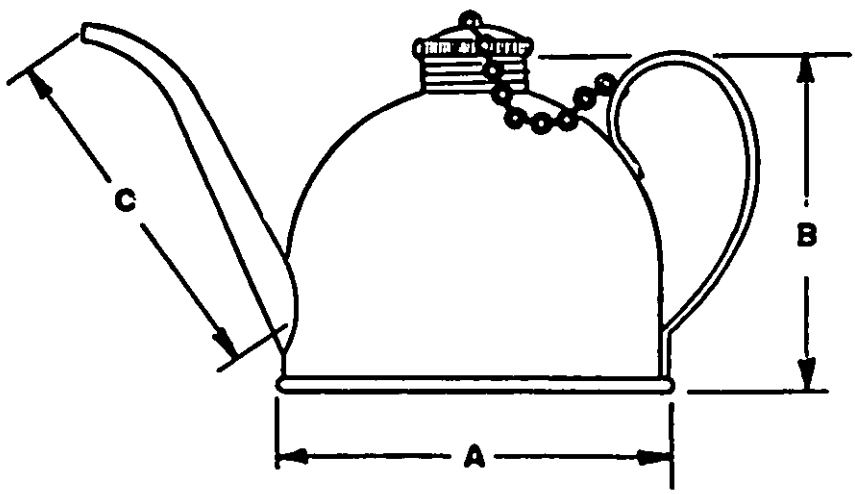


Figure 9. Type III, filler.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

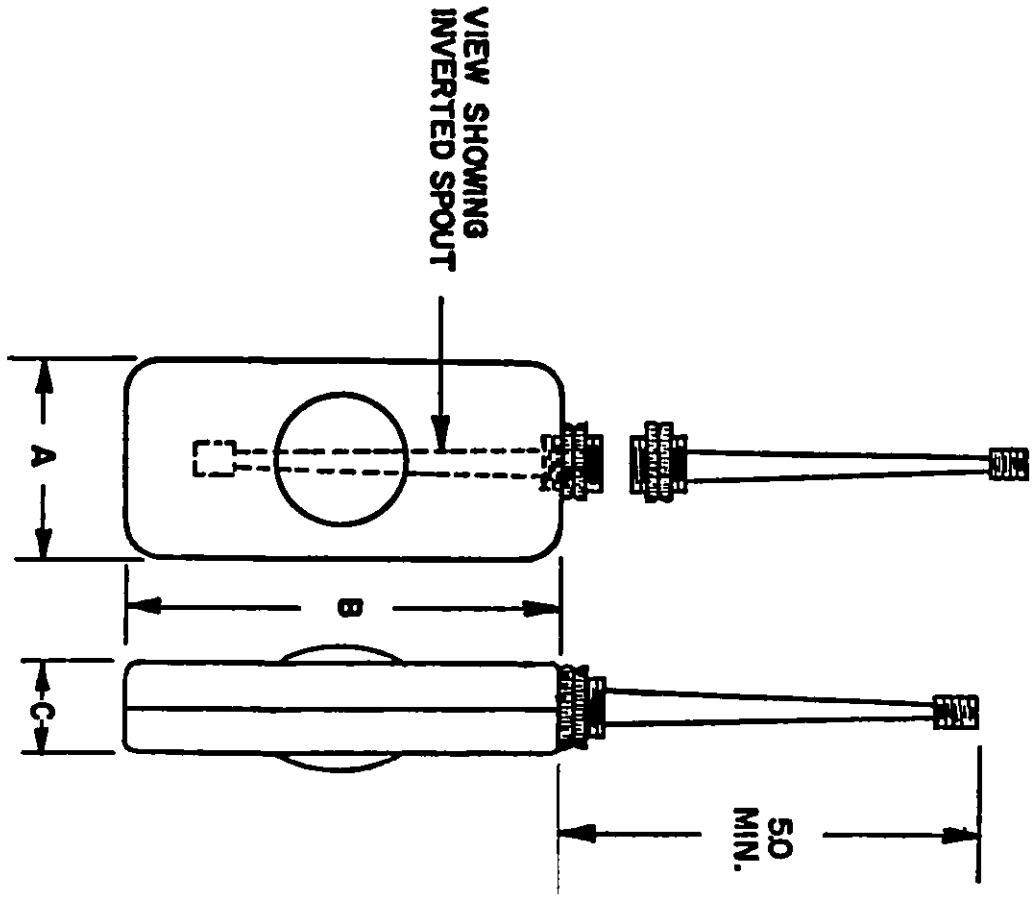


Figure 10, Type IV, rectangular, push sides oiler.

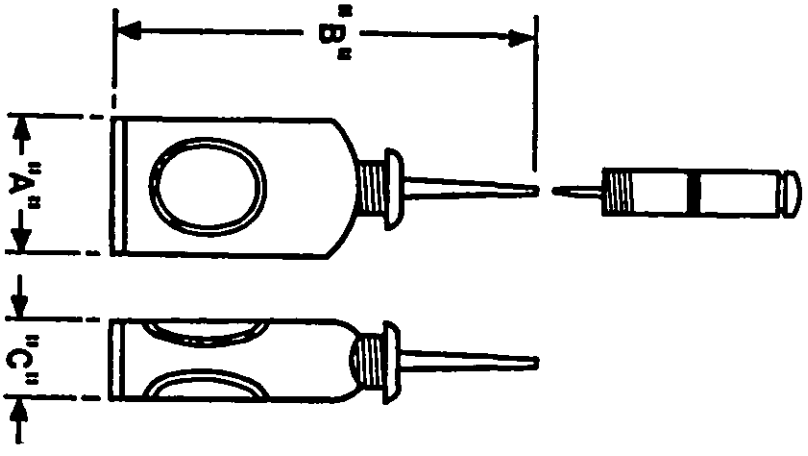


Figure 11, Type V, style 1, oval shape, typewriter oiler.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

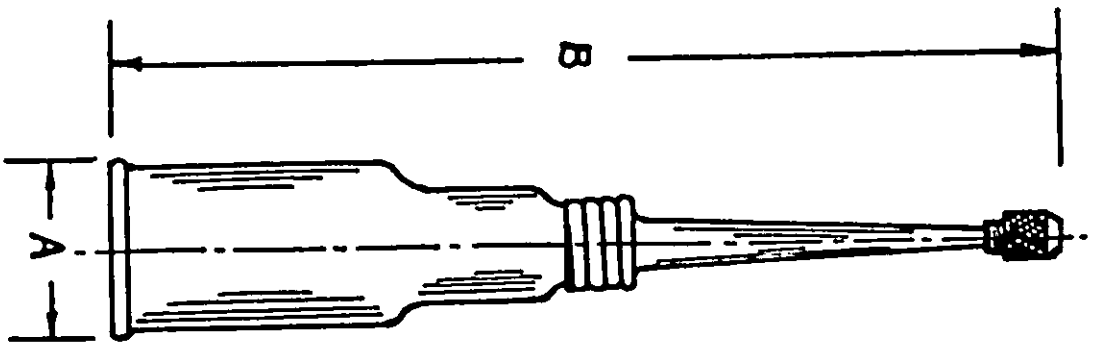


Figure 12. Type V, style 2, cylindrical shape, typewriter oiler.

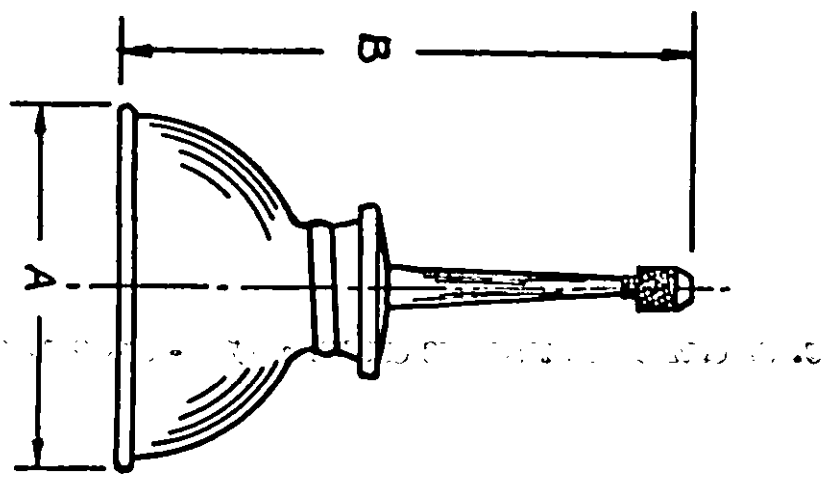


Figure 13, Type V, style 3, hemispherical shape, typewriter oiler

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:40Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - ME
Air Force - 99

Review activities:

Army - GL, EA, MI
DSA - CS

User activities:

Army - WC
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

Navy - YD

Project No. 4930-0267

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 65 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.