GGG-O-599b
September 11, 1963

SUPERSEDING
Fed. Spec. GGG-O-599a
December 23, 1952

FEDERAL SPECIFICATION

OPENER, CRATE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope.** This specification covers crate openers which are used to open nailed wood boxes and crates.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity indicated by the title of the specification, but cover only those generally used by the Federal Government.

1.2 **Classification.**

1.2.1 *Sizes.* The openers shall be of the following sizes, as specified (see 6.2):

Size I.—Light weight, short handle.

Size II.—Medium weight, long handle.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 **Specifications and standards.** The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government Activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools, Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:40Z
Check the source to verify that this is the currentversion before use.

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), the crate opener covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification.

3.2 Illustration. The illustration shown on figure 1, except for dimensions and weight, is for convenience of identification and is not intended to preclude purchase of openers which are otherwise in accordance with the requirements of this specification.

3.3 Material and construction. The box and crate opener shall conform to the dimensional and weight requirements shown on figure 1. The opener shall be fabricated from high-carbon steel and shall be forged in one piece, consisting of a shank with a hammerhead on one end and a two-section chisel-type tapered claw suitable for pulling nails on the other end. The hammer-face ends and the claw-end shall be hardened and tempered to a hardness of Rockwell C45 to C55 (see 4.4.1).


3.4 Finish. The openers shall be thoroughly cleaned and shall be free from dirt, scale, or other material. A protective coating of paint or lacquer in accordance with commercial practice shall be applied to the opener.

3.5 Identification marking. Each opener shall be permanently and legibly marked with the manufactu.er's name or trademark of such known character that the source of manufacture may be readily determined.

3.6 Workmanship. The finished item shall be clean, and all sharp edges and burrs shall be removed. The finished item shall conform to the quality and grade of product established by this specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless

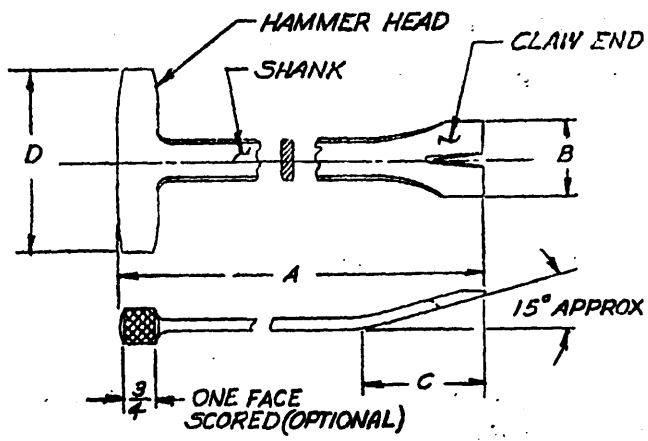

SIZE	WEIGHT MIN.	WEIGHT MAX.	"A" MIN.	"A" MAX.	"B" MIN.	"B" MAX.	"C" MIN.	"C" MAX.	"D" MIN.	"D" MAX.
	OZ	OZ	IN.	IN.	IN.	IN.	IN.	IN.	IN.	IN.
I	7	10	6	7	1¼	2	2	3¼	2	3
II	12	16	8½	9½	1½	2	2	3¼	2½	3¼

FIGURE 1.—Crate openers.

Source: https://assist.dla.mil — Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Preproduction sample.** When a preproduction sample is required, it shall be examined for defects listed in 4.3.2.1, dimensions specified herein, and tested as specified in 4.4.1.

4.3 **Sampling for inspection and acceptance.** Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 *Inspection of components and materials.* In accordance with 4.1, the supplier is responsible for insuring that components and materials used are manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification.

4.3.2 *Intermediate testing.* Crate openers shall be tested as specified in 4.4.1. The sample unit shall be one crate opener of one size. An inspection lot shall consist of all crate openers of one size offered for inspection at one time. The inspection level shall be level I with an Acceptable Quality Level (AQL) of 2.5 defects expressed in terms of defects per hundred units.

4.3.3 *End product inspection.* An inspection lot shall consist of all crate openers of one size offered for acceptance at one time. The sample unit for these examinations shall be one crate opener of one size.

4.3.3.1 *Visual examination.* The crate openers shall be visually examined for defects as outlined in table I. The inspection level shall be level II with an AQL of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

TABLE I.—Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Paint or lacquer missing	X	
Construction and workmanship general	Sharp burr on edges	X	
	Ragged or chipped edges		X
Marking identification	Missing, incomplete, not legible, not permanent		X

4.3.3.2 *Dimensional and weight examination.* Examination shall be made of end product to determine compliance with dimensional and weight requirements. Any opener not within the established requirements shall be classified a defect. The inspection level shall be L8 with an AQL of 2.5 defects expressed in terms of defects per hundred units.

4.3.4 *Examination of preparation for delivery.* Examination shall be made to determine compliance with preservation and packaging, packing and marking requirements in accordance with MIL-H-15424.

4.4 **Test.**

4.4.1 *Hardness test.* The hardness test shall be in accordance with the applicable requirements of Method 243.1 of Fed. Test Method Std. No. 151 and the value thus obtained shall comply with the requirements of 3.3. Impressions shall be taken 3/4 inch from the claw end and either on the hammer face or within 1/4 inch of the hammer face.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions and application of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:40Z
Check the source to verify that this is the current version before use.

the various levels of preservation, packaging and packing.)

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.* Openers shall be preserved and packaged in accordance with level A of MIL-H-15424.

5.1.2 *Level C.* Openers shall be preserved and packaged in accordance with the manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Openers, preserved and packaged as specified in 5.1, shall be packed in accordance with level A of MIL-H-15424.

5.2.2 *Level B.* Openers, preserved and packaged as specified in 5.1, shall be packed in accordance with level B of MIL-H-15424.

5.2.3 *Level C.* Openers, cleaned, preserved, and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The crate openers covered by this specification are used to open nailed wood boxes and crates.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Size required (1.2).
(*c*) When preproduction sample is required (3.1).
(*d*) Levels of preservation, packaging and packing (5.1 and 5.2).
(*e*) Marking, if different (5.3).

6.3 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tools, not otherwise indexed by name.
Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, not otherwise indexed.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—GL
Navy—Y
Air Force—MOA

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:40Z
Check the source to verify that this is the current version before use.