GGG-P-655b
March 26, 1964

SUPERSEDING
Fed. Spec. GGG-P-655a
November 14, 1955

FEDERAL SPECIFICATION

PRICKER, SAILMAKER'S

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers sailmaker's prickers used for splicing rope or cables.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Type and size.* This specification covers one type and size of sailmaker's pricker as hereinafter specified.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools; Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Illustration. The illustration shown herein is descriptive and not restrictive and is not intended to preclude the purchase of sailmaker's prickers otherwise conforming to this specification.

3.2 Material. The sailmaker's prickers shall be made of good quality material so as to insure strength and durability.

3.3 Components. Sailmaker's prickers shall consist essentially of a handle and blade.

3.3.1 *Handle.* The handle shall be made of good quality hard maple, ash, beech, hickory, oak or birch, smoothly finished and properly designed to afford a comfortable grip, and shall be shellacked or varnished. The wood comprising the handle shall have not more than 12 percent moisture content as determined by a standard moisture meter. The front or small end of the handle shall be equipped with a ferrule to prevent the handle from splitting.

3.3.2 *Blade.* The blade shall be made of tool steel and shall have a hardness value of not less than 45 nor more than 50 on the Rockwell C scale within 1/2 inch of the blade end (see 4.3.1).

3.3.2.1 *Tang.* To insure against turning in the handle, the tang of the blade shall be forged into a 5/16-inch square for a distance of approximately 3/4 inch, and shall be forged round for the remainder of its length. The tang shall extend completely through the center of the handle and through a countersunk washer at the handle end. The tang end shall be smoothly peened over the washer. The tang end of the blade shall show a hardness value of not more than 36 on the Rockwell C scale (see 4.3.2).

3.3.2.2 *Shank.* The shank shall be round, smooth, and gradually tapered from the maximum diameter terminating in a suitably shaped point, properly hardened, tempered, and polished. The shank end shall be flattened on two sides. In the opposite plane, the 1/2-inch taper per foot shall be continued to approximately 1/4 inch from the end where the point is rounded to allow easy entrance of the point between the strands of rope or wire.

3.4 Dimensions. Sailmaker's prickers shall be similar to figure 1 and shall conform to table I.

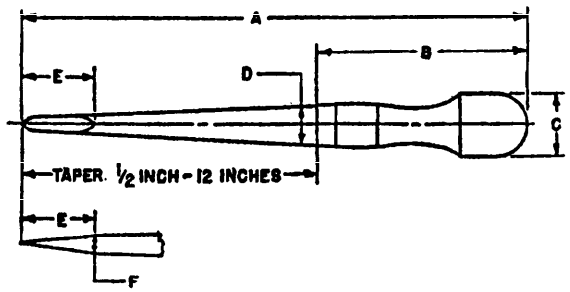


FIGURE 1.—Sailmaker's pricker.

3.5 Identification marking. Each pricker shall be stamped or otherwise permanently marked in a plain and legible manner on the shank, near the handle end, with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

TABLE I.—*Dimensions*

Length ± 10 percent			Large diameter ± 10 percent		Diameter ± 0.020	Taper of Shank
Overall A	Handle B	Flat on point E	Handle C	Shank D	Shank F	
Inches	*Inches*	*Inch*	*Inches*	*Inch*	*Inch*	
10-3/8	4-1/2	1	1-1/4	9/16	0.205	1/2 inch per foot

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

3.6 **Workmanship.** The sailmaker's pricker shall be of the best workmanship and made in accordance with good commercial practice, and shall be free from any defects and blemishes which affect the appearance or which may affect the serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Sampling for quality conformance inspection.** Sampling for quality conformance inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.2.1 *Intermediate testing.* Before final assembly of the blade and handle, the blade end and tang of the blade shall be tested for Rockwell C hardness as specified in 4.3.1 and 4.3.2 respectively, to determine compliance with the hardness requirements specified in 3.3.2 and 3.3.2.1 as applicable. The sample unit shall be one blade. For the blade end hardness test, the inspection level shall be S-3 with an acceptable quality level (AQL) of 2.5 defects expressed in defects per hundred units. For the tang of the blade hardness test, the inspection level shall be S-2 with an AQL of 6.5 defects expressed in defects per hundred units.

4.2.2 *End product inspection.*

4.2.2.1 *Visual examination.* The prickers shall be visually examined for defects as outlined and classified in table II. The sample unit shall be one completely fabricated pricker. The lot size shall be expressed in units of prickers for the purpose of determining the sample size in accordance with MIL-STD-105. The inspection level shall be level II with an AQL of 2.5 for major defects and 6.5 total defects expressed in defects per hundred units.

TABLE II.—*Classification of defects*

Examine	Defect	Classification	
		Major	Minor
Finish	Missing.		X
	Not as specified.		X
Design	Any characteristic not in accordance with the specified requirements.	X	
Construction and Workmanship	Part missing.	X	
	Sharp burr or edges that may be injurious to personnel.	X	
	Fractured, split, cracked, malformed, bowed, broken or otherwise impaired.	X	
	Not connected or joined as specified.	X	
	Not smooth, scratches or nicks.		X
	Evidence of rust.	X	
Assembly	Unit not properly assembled or secured or does not function as required.	X	
Marking Identification	Missing, incomplete, not legible, not permanent, or not as specified.		X

4.2.2.2 *Dimensional examination.* Examination shall be made of prickers to determine compliance with dimensional requirements specified herein. Any dimension that is not within the specified requirements shall be classified a defect. The inspection level shall be S-4 with an AQL of 4.0 defects expressed in defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:41Z
Check the source to verify that this is the currentversion before use.

4.3 Tests.

4.3.1 *Hardness test for blade end.* The blade end shall be tested for Rockwell C hardness in accordance with Method 243.1 of Fed. Test Method Std. No. 151.

4.3.2 *Hardness test for blade tang.* The tang of the blade shall be tested for Rockwell C hardness in accordance with Method 243.1 of Fed. Test Method Std. No. 151.

4.4 Examination of preparation for delivery. Inspection to determine compliance with preparation for delivery shall be made in accordance with MIL-H-15424 for "Screwdriver, Cabinet, Wood Handle".

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions and applications of the various levels of packaging and packing for supplies and equipment.)

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.1).

5.1.1 *Level A or C.* Prickers shall be preserved and packaged in accordance with the applicable requirements of MIL-H-15424.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.1).

5.2.1 *Level A, B, or C.* Prickers, preserved and packaged as specified in 5.1, shall be packed in accordance with the applicable requirements of MIL-H-15424.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Selection of the applicable level of preservation, packaging, and packing (see 5.1 and 5.2).
(*c*) Special marking, if required (see 5.3).

6.2 Transportation description. The applicable transportation description is:

Tools, not otherwise indexed by name.
Carload minimum weight 30,000 pounds.

Mechanics' hand tools, not otherwise indexed.
Truckload minimum weight 30,000 pounds.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—GL

Navy—Ships

Air Force—MOA

Preparing Activity:

Navy—Ships

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:41Z
Check the source to verify that this is the currentversion before use.