INTERIM FEDERAL SPECIFICATION

SPOON, BODY AND FENDER

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20407, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION.

1.1 Scope. - This specification covers body and fender spoons for hand use in straightening, swaging, and finishing sheet metal bodies and fender of automobiles and other motor vehicles.

1.1.1 Federal specification coverage. - Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Type and styles. - Body and fender spoons shall be of one type and the following styles, as specified (see 6.1 and 6.4).

Style I. - Double end, lower back panel and quarter panel.
Style II. - Double end, door and side apron.
Style VI. - High crown, surfacing.
Style VIII. - Double end, heavy duty, driving.
Style XV. - Double end, heavy duty, driving and fender beading.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. - The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-B-640 - Boxes, Folding, Fiberboard, Corrugated, Triple Wall.

Federal Standards:
Fed. Std. No. 102 - Preservation, Packaging and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 151 - Metals; Test Methods.

Military Specification:
MIL-P-116 - Preservation, Methods Of.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:41Z
Check the source to verify that this is the current version before use.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. - The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of body and fender spoons which are otherwise in accordance with this specification.

3.2 Material. - The material used in the manufacture of body and fender spoons shall be steel having .40 percent carbon (minimum). All material shall be of uniform quality, free of porosity, hard spots, cracks or other injurious defects.

3.2.1 Hardness. - The spoons shall have a Rockwell hardness of not less than 38 nor more than 48 on the C scale when tested as specified in 4.5.1.

3.3 Finish. - All working surfaces of the spoons shall be ground, buffed or otherwise finished in a manner to produce a surface finish equivalent to roughness height averages (RHA) 63 or finer. All radii and contours shall be smoothly bended and free from burrs and sharp edges.

3.3.1 Protective finish. - All working surfaces shall be coated with a clear lacquer or other equally suitable transparent coating. All non-working surfaces shall be completely coated with an enamel or paint that shall be applied on a clean surface. All surfaces shall be capable of conforming to the requirements specified in 4.5.2.

3.4 Style I, double end, lower back panel and quarter panel. - Style I spoons shall conform to the dimensions of and be similar to figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

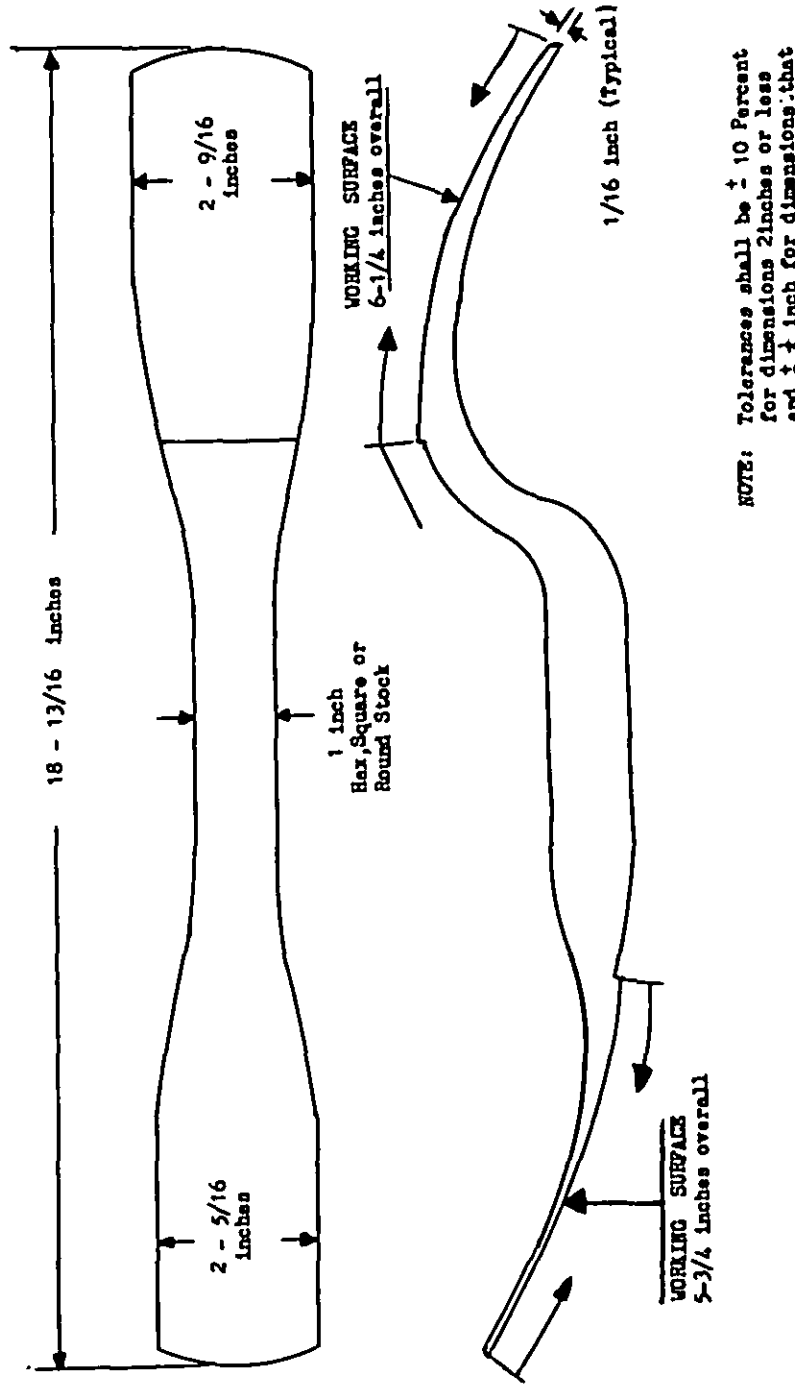


Figure 1. - Style I, double end, lower back panel, and quarter panel.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:41Z
Check the source to verify that this is the current version before use.

3.5 Style II, double end, door and side apron. - Style II spoons shall conform to the dimensions of and be similar to figure 2.

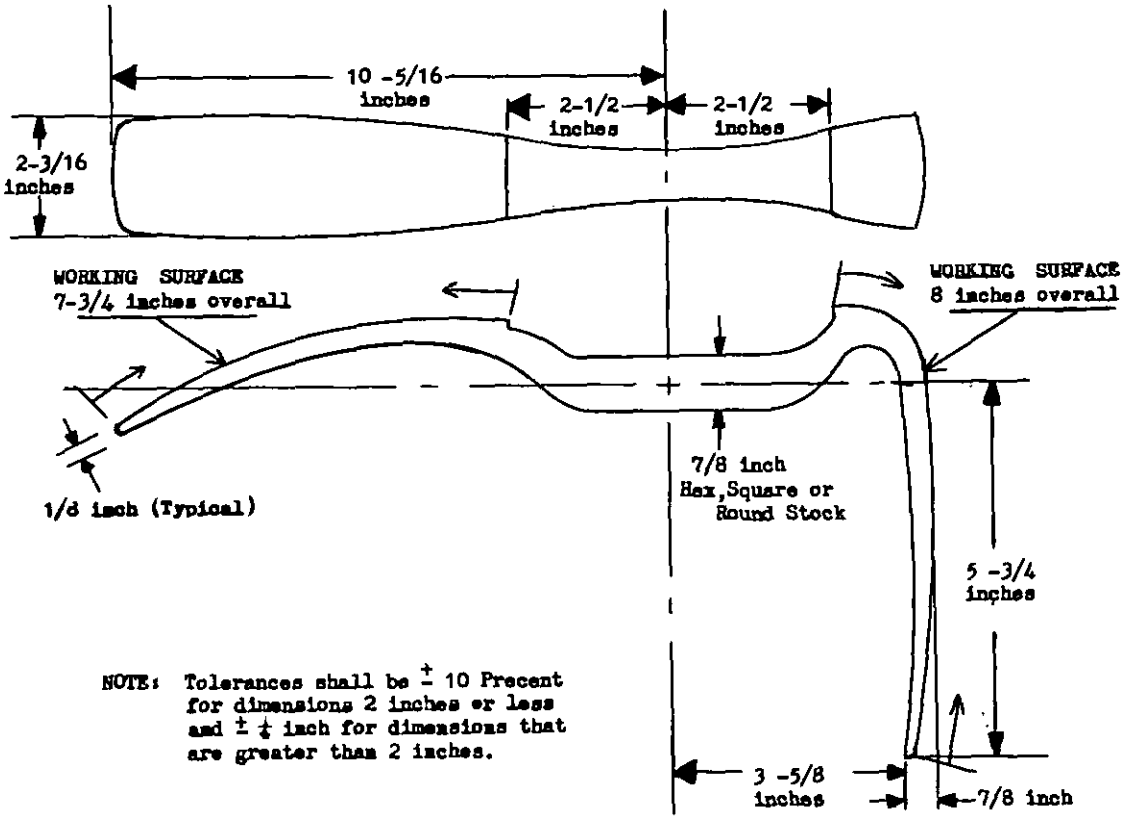


Figure 2. - Style II, double end, door and side apron.

3.6 Style VI, high crown, surfacing. - Style VI spoons shall conform to the dimensions of and be similar to figure 3.

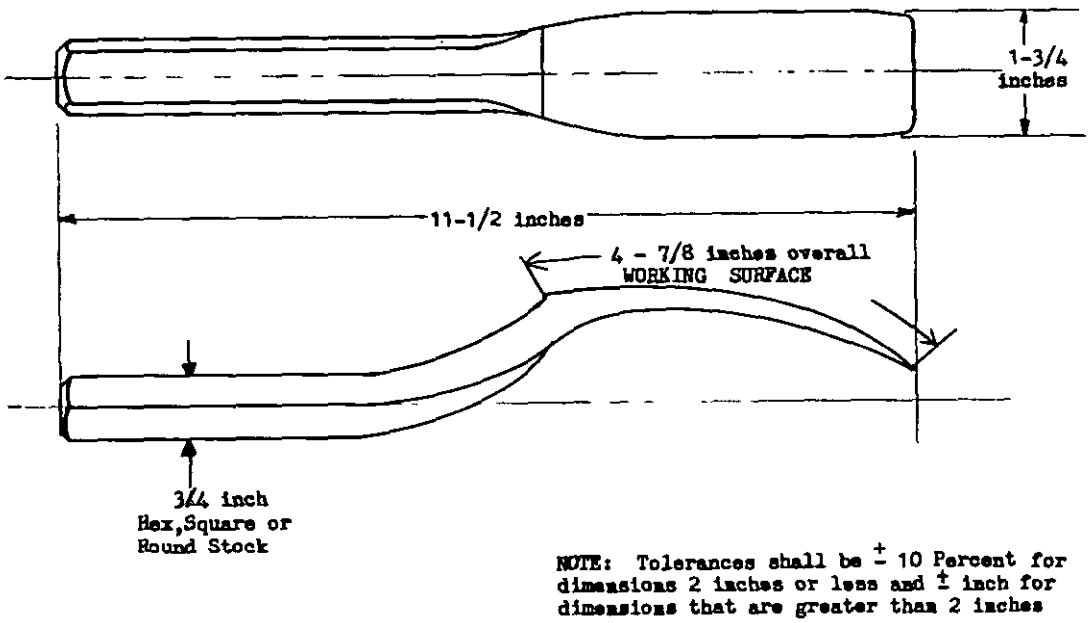


Figure 3. - Style VI, high crown, surfacing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

3.7 Style VIII, double end, heavy duty, driving. - Style VIII spoons shall be designed to provide two heavy duty driving pads and shall conform to the dimensions of and be similar to figure 4.

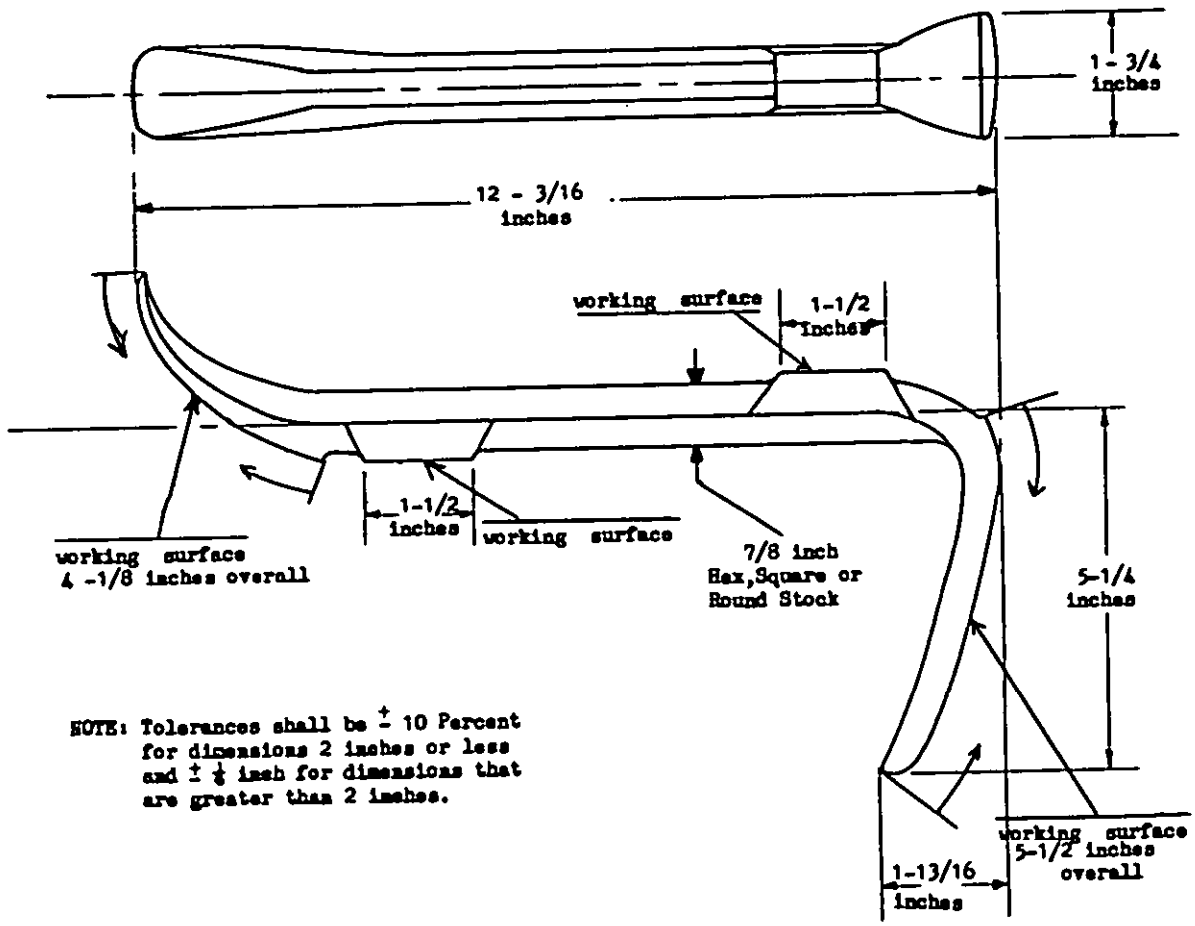


Figure 4. - Style VIII, double end, heavy duty, driving.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

3.8 Style XV, double end, heavy duty, driving and fender beading. - Style XV spoons shall be designed to provide two heavy duty driving pads and shall conform to the dimensions of and be similar to figure 5.

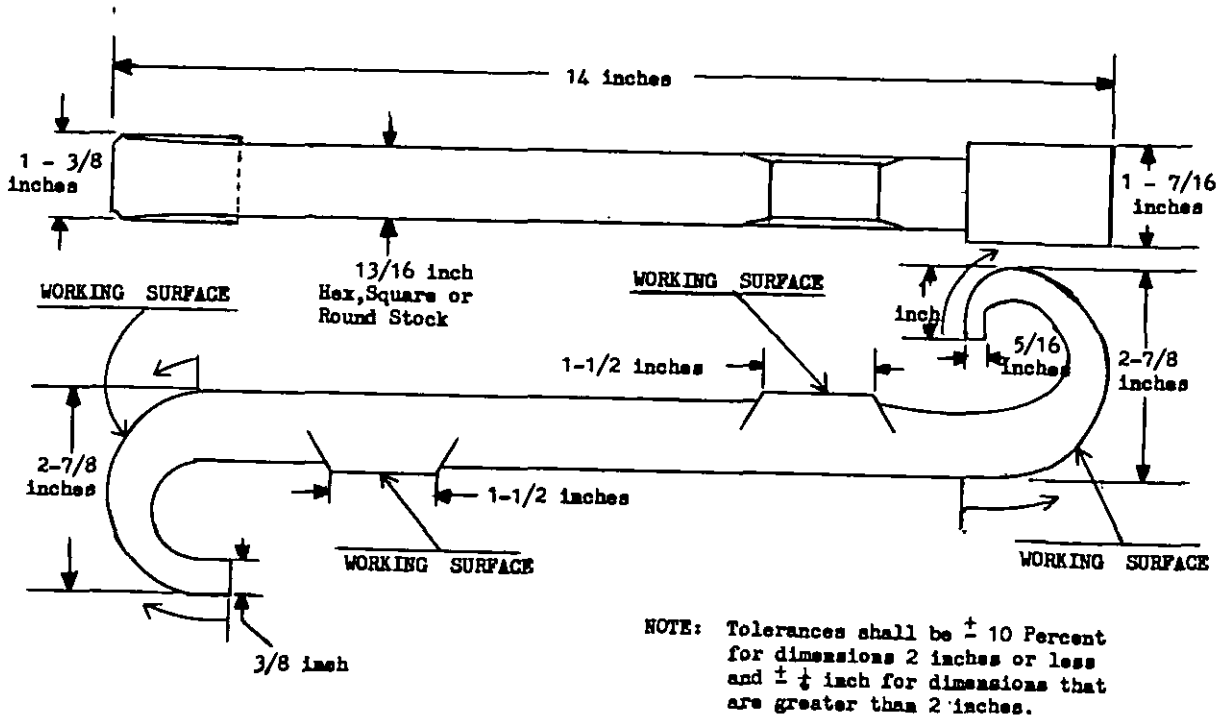


Figure 5. - Style XV, double end, heavy duty, driving and fender beading.

3.9 Marking. - The body and fender spoons shall be marked on a non-working surface, in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.10 Workmanship. - Workmanship shall be first class in every respect. The spoons have no burrs, fins, sharp projections or any other imperfections which may impair their durability or serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for lot acceptance.

4.2.1 Lot. - All body and fender spoons of the same style submitted for acceptance at one time shall be considered a lot for purposes of inspection.

4.2.2 Sampling for examination. - A random sample shall be selected from each lot for examination in accordance with Standard MIL-STD-105 at inspection level II. The acceptable quality level (AQL) shall be 4.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

4.2.3 Sampling for acceptance tests. - A random sample shall be selected from each lot for acceptance tests in accordance with Standard MIL-STD-105 at inspection level S-3. The AQL shall be 2.5 percent defective.

4.3 Inspection. - Each of the sample spoons selected in accordance with 4.2.2 shall be visually and dimensionally examined to determine compliance with this specification. Any spoon in the sample containing one or more defects shall be rejected and if the number of defective spoons in any sample exceeds the acceptance number for that sample, the lot represented by that sample shall be rejected.

4.4 Acceptance tests. - Each sample spoon selected in accordance with 4.2.3 shall be tested in accordance with 4.5 to verify compliance with this specification. Any spoon in the sample which does not meet the requirements for any of these tests shall be rejected and if the number of nonconforming spoons exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.5 Test procedures.

4.5.1 Hardness test. - Each of the sample body and fender spoons selected in accordance with 4.2.3 shall be tested in accordance with Method 243 of Fed. Std. No. 151 to determine compliance with 3.2.1.

4.5.2 Rust resisting test. - The sample enamel-coated spoon shall be placed in a pan (or tray) of water, the depth of which shall be such as to cover approximately one-half of the spoon. The spoon shall remain in the water for 24 hours, at room temperature. Upon removal from the water, there shall be no evidence of rust or rust colored film on the sample spoon.

4.5.3. Carbon content. - Carbon content shall be as specified in 3.2. Certified test reports for chemical composition shall be acceptable in lieu of testing the lot sample, otherwise chemical analysis shall be made of the lot sample.

4.6 Inspection of preparation for delivery requirements. - An inspection shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table I. For examination of contents the sample unit shall be one shipping container fully prepared for delivery selected just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be II and the AQL shall be 6.0 defects per hundred units.

Table I. - Classification of Preparation for Delivery Defects.

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of container.

5. PREPARATION FOR DELIVERY

(For civil agency procurement the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102).

5.1 Packaging. - Packaging shall be level A, B, or C as specified (see 6.1).

5.1.1 Level A. - Each spoon shall be packaged method III in accordance with MIL-P-116.

5.1.2 Level B. - The spoons shall be packaged in accordance with paragraph 5.1.1.

5.1.3 Level C. - The spoons shall be packaged in accordance with the suppliers commercial practice.

5.2 Packing. - Packing shall be level A, B or C as specified (see 6.1).

5.2.1 Level A. - Spoons of like description shall be packed together in close-fitting boxes conforming to PPP-B-585, class 3, PPP-B-601, type II, class 2, PPP-B-621, class 2, PPP-B-636, class 2 or PPP-B-640, class 2, grade A. Blocking and bracing shall be provided. The fiberboard boxes shall be closed in accordance with the appendix to the box specification. The gross weight of the triple wall fiberboard box and the wood boxes shall not exceed approximately 200 pounds. The gross weight of the PPP-B-636 fiberboard box shall not exceed the weight limitations of the box specification. Strapping shall be in accordance with the appendix to the applicable box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

5.2.2.1 Styles I, II, VIII and XV. - Twelve spoons of like description shall be packed together in a close-fitting box conforming to PPP-B-636, class 1, style RSC. Blocking and bracing shall be provided. The box shall be closed in accordance with the appendix to the box specification.

5.2.2.2 Style VI. - Twenty-four spoons shall be packed in a close-fitting box conforming to PPP-B-636, class 1, style RSC. Blocking and bracing shall be provided. The box shall be closed in accordance with the appendix to the box specification.

5.2.3 Level C. - The spoons shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. - In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. - In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Style of spoon required (see 1.2.1).
(c) Level of packaging and packing required (see 5.1 and 5.2).
(d) Any special marking required (see 5.3).

6.2 For civil agency procurements. - When level B packaging is required for civil agency procurements, the requirements in paragraph 5.1.1, level A packaging shall apply.

6.3 Transportation description. - The applicable transportation description, truckload and carload weights are as follows:

Mechanics' hand tools, not otherwise indexed by name.
In barrels, boxes or packages, 996 of Consolidated Freight Classification.
Carload weight 30,000 pounds.

In barrels or boxes.
Truckload weight 30,000 pounds.

Minimum weights shown apply when material is transported at classification ratings. They will vary when material moves on commodity rates. When in doubt, consult General Services Administration Regional Traffic Manager.

6.4 Explanation of style numbering. - Style numbering has been accomplished in accordance with Cataloging Handbook H 6-3, Section C, Ref. Dwg. Group 280.

GSA OC 64-15738

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:41Z
Check the source to verify that this is the current version before use.