GGG-S-326d
November 1, 1963

SUPERSEDING
Int. Fed. Spec. GGG-S-00326c (GSA-FSS)
November 14, 1961 and
Fed. Spec. GGG-S-326b
May 27, 1955

FEDERAL SPECIFICATION

SHOVELS, SCOOPS, SPADES, SNOW PUSHERS, AND TELEGRAPH SPOONS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hand shovels, scoops, spades, snow pushers, and telegraph spoons for general use in handling loose and bulky materials such as dirt, sand, gravel, grain, snow, and so forth, as applicable.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes, and styles.* The shovels, scoops, spades, and telegraph spoons shall be of the following types, classes, and styles as specified (see 6.2):

Type I.—Scoop, break down.
Type II.—Scoop, eastern pattern.
Type III.—Scoop, sand and gravel.
Type IV.—Shovel, round point.
  Class A.—D-handle.
    Style 1.—Open back.
    Style 2.—Closed back.
    Style 3.—Solid shank.
    Style 4.—Plain back.
  Class B.—Long handle.
    Style 1.—Open back.
    Style 2.—Closed back.
    Style 3.—Solid shank.
    Style 4.—Plain back.
Type V.—Shovel, square point.
  Class A.—D-handle.
    Style 1.—Open back.
    Style 2.—Closed back.
    Style 3.—Solid shank.
    Style 4.—Plain back.
  Class B.—Long handle.
    Style 1.—Open back.
    Style 2.—Closed back.
    Style 3.—Solid shank.
    Style 4.—Plain back.
Type VI.—Shovel, molders'.
    Style 1.—Open back.
    Style 2.—Closed back.
    Style 3.—Solid shank.
    Style 4.—Plain back.
Type VII.—Shovel, snow or barn (general purpose).
  Class A.—D-handle.
  Class B.—Long handle.
Type VIII.—Shovel, telegraph.
  Class A.—Straight handle.
  Class B.—Bent handle.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

Type IX.—Spade, ditch or post.
Style 1.—Closed back.
Style 2.—Solid shank.
Style 3.—Plain back.

Type X.—Spade, drain.
Style 1.—Closed back.
Style 2.—Solid shank.
Style 3.—Plain back.

Type XI.—Spade, garden.
Class A.—D-handle.
Style 1.—Open back.
Style 2.—Closed back.
Style 3.—Solid shank.
Style 4.—Plain back.
Class B.—Long handle.
Style 1.—Open back.
Style 2.—Closed back.
Style 3.—Solid shank.
Style 4.—Plain back.

Type XII.—Spoon, telegraph, eastern pattern.

Type XIV.—Shovel, snow, D-handle.
Class A.—Light weight.
Class B.—Medium weight.

Type XV.—Pusher, snow, long handle.
Class A.—Light weight.
Class B.—Medium weight.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

NN-H-81—Handles, Ash, for Tools.
NN-H-93—Handles; Hickory, Striking Tool.

Federal Standards:

Fed. Std. No. 48—Tolerances for Steel and Iron Wrought Products.
Fed. Std. No. 102—Preservation, Packaging and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools; Packaging of.

Military Standard:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are descriptive and not restrictive, and are not intended to preclude the purchase of shovels otherwise conforming to this specification.

3.2 Construction.

3.2.1 *Open back.* The open back shall be constructed in such a manner that the socket for the handle is integral with the blade. The center portion of the blade at the shoulder end shall be arched to form a frog with an open or hollow recess in the back. The

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

shoulder shall curve away from the socket and smoothly blend with the curvatures of the blade. For securing the assembled handle, the socket shall have either one or two through holes to accommodate rivet(s) not smaller in diameter than No. 6 size.

3.2.1.1 *Sockets.* The sockets for types IV, V, and XI open back shall be 9 inches long (plus or minus 1/4 inch) and shall be closed for a length of 7 inches (plus or minus 1/4 inch) measured from the top of the socket. The socket shall be deemed to be closed when the seam opening of the socket does not exceed 3/16 inch. The taper of the socket shall be such as to provide a good fit for replacement handles specified in 3.5.3.

3.2.2 *Closed back.* The closed back shall conform to the requirements specified in 3.2.1 except that the back of the blade shall be supplemented by a steel plate welded over the open or hollow recess. The steel plate shall be welded in such a manner as to produce a smooth surface on the back of the blade. For securing the assembled handle, the socket shall have either one or two through holes to accommodate rivet(s) not smaller in diameter than No. 6 size.

3.2.3 *Solid shank.* The solid shank shall be forged rolled and formed from one piece of steel in order that the blade, shank, and socket will be integral. The shank and the center or thickest portion of the blade at the shoulder end shall be formed to provide a frog. The socket shall have a straight inside taper of sufficient depth to properly receive the handle.

3.2.4 *Plain back.* The plain back shall have two straps either of separate pieces of steel seam-welded to the blade, or the front strap being an integral part of the blade and the back strap preformed and welded to the back of the blade. The front and back straps shall be opened forming a uniform frog into which the socket end of the handle is inserted. The straps shall have no less than two holes to accommodate No. 4 rivets for securing the handle when assembled.


3.3 **Method of measuring.** The dimensions as specified in tables II through XVII shall be measured as illustrated in figure 1.

3.4 **Blades.** The blades and other metal parts shall be high-grade steel of uniform quality free from hard spots. The blades of all tools except types XIV and XV shall be properly heat treated to provide tools capable of long life under ordinary service conditions and withstanding the tests specified in section 4. The dimensions of the blade shall conform to the applicable tables hereinafter specified. All exposed metal edges shall be smooth except the cutting edge of the blade which shall be sharpened or beveled in accordance with good commercial practice. The cutting edge of round-point shovels shall be considered as the bottom curved half of the blade.

3.4.1 *Blade thickness.* The blade thickness shall be measured at no less than three different points on the blade. The small circles as illustrated in figure 1 shall indicate approximately where the thickness of the blade is to be measured. The measurement of the thickness and crown shall be within the tolerances established in paragraphs 14A1 and 14A2 of Fed. Std. No. 48. The steel gage numbers referenced throughout this specification are of the manufacturers' standard gage for steel.

3.4.2 *Blade hardness.* The full length of all blades, except for types XIV and XV, shall be properly hardened to a Rockwell hardness value of not less than 40 nor more than 47 on the C scale. In addition, 4 inches of the blade socket measured from the blade shoulder shall also be hardened the same as the blades except that sockets for plain back tools and types XIV and XV snow tools need not be hardened.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

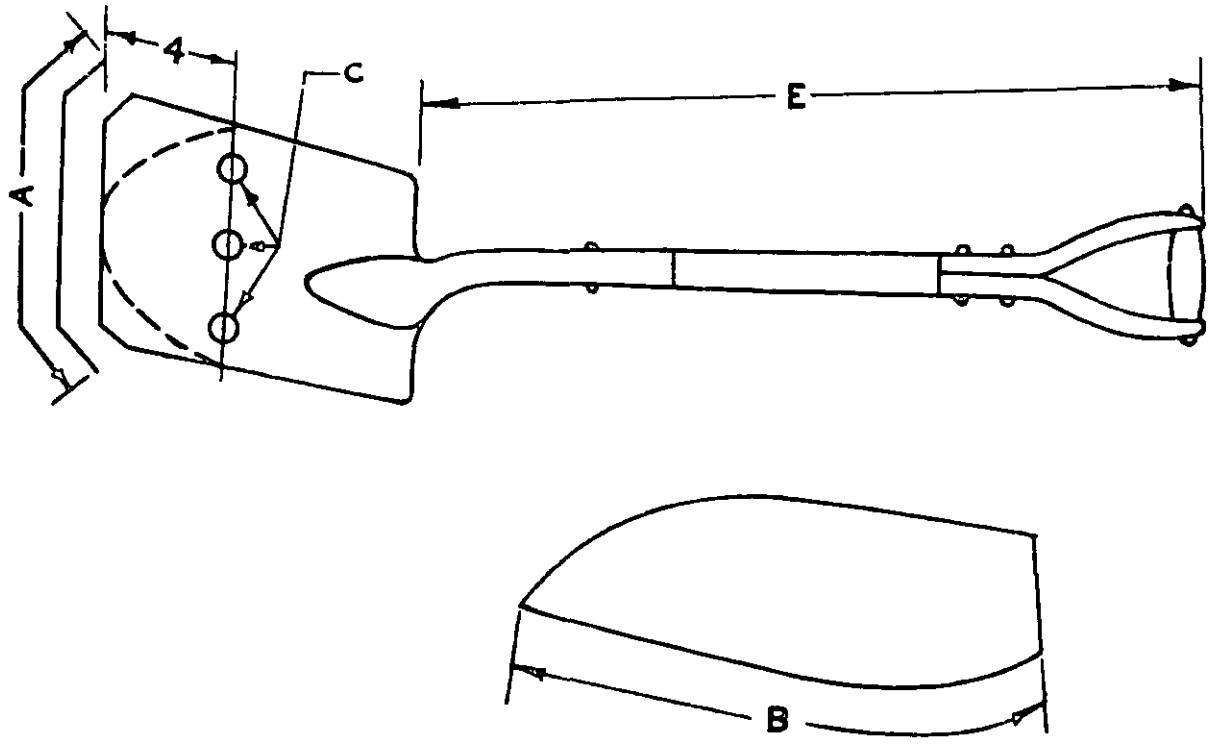

A Blade width is the largest measurement obtained following the curvature of the blade.
B Blade length.
C Blade thickness.
D Strap or socket length.
E Handle length from shoulder of blade to end of handle.
F Handle lift.

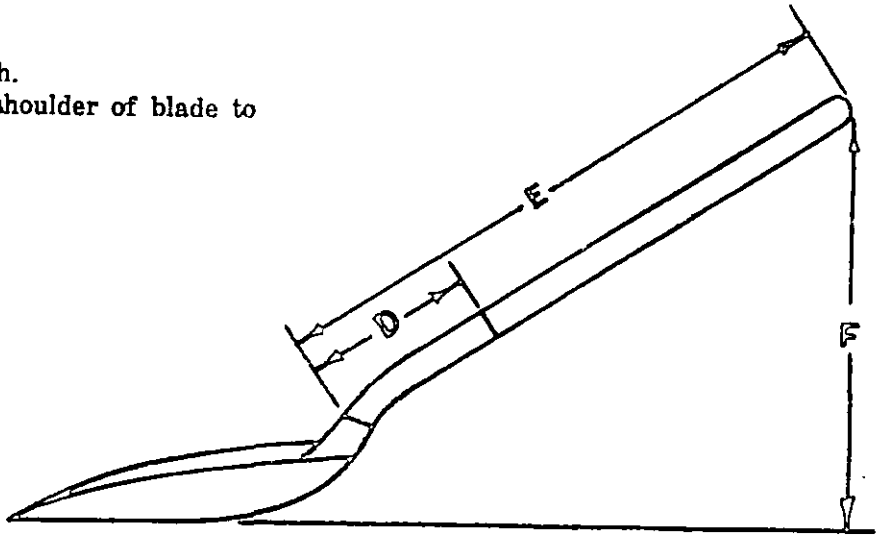


FIGURE 1.—Method of measuring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.4.3 *Metal finish of blade.* The blade and other metal parts shall be substantially free from burrs, cracks, or other detrimental defects. Except for types XIV and XV, the edges of rivet heads shall be flush with the surface. All radii and contours shall be blended and smoothly finished in accordance with good commercial practice.

3.5 **Handles.** The handles shall be of seasoned SA grade ash conforming to the requirements of NN-H-81 except that, at the option of the manufacturer, hickory in accordance with NN-H-93 may be used in lieu of ash for type VIII telegraph shovels and type XII telegraph spoons.

3.5.1 *D-handles.* The D-handles shall have a steel tubular dee with a wood grip or spool. The wood handgrip shall be riveted to the sides of the dee and secured either by staking or clip locks to prevent the handgrip from becoming loose or turning. The steel tubular dee shall be secured to the wood handle with not less than two rivets or four barbed nails. One rivet will suffice where the wood prongs of the handle extend into the steel tubes of the dee. The D-handle shall be in conformance with 3.5 and shall conform to the dimensions of figure 2.

3.5.2 *Long handles.* All long handles except those for telegraph shovels, telegraph spoons, and snow pushers shall conform to the dimensions of table I.

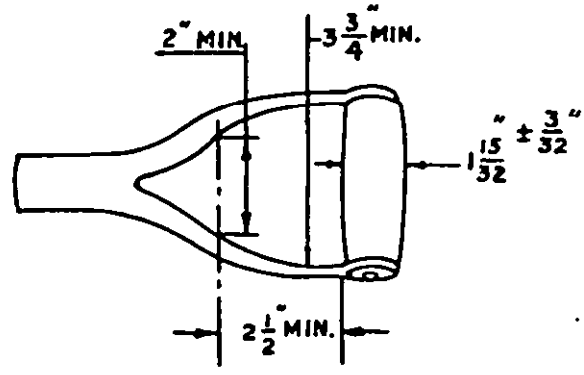


FIGURE 2.—Dimensions for D-handles.

3.5.3 *Replacement handles.* Replacement handles for type IV, classes A and B, style 1; type V, classes A and B, style 1; and type XI, classes A and B, style 1, open-back shovels and garden spades shall be in accordance with 3.5. The chuck end of the handle shall have a straight tapered section provided with a shoulder in order that the outside diameter of the blade socket will be approximately flush with the handle when assembled. The tapered end of the handle shall be slotted to allow the taper portion to take the shape of the socket. The slot shall be at right angles to the grain, not offset more than 1/16 inch from the axial center line of the handle. Two oval-head rivets being of sufficient lengths for securing the handle to the socket shall be furnished with each replacement handle. The rivets shall be fastened to the handles in a manner to preclude their being lost during shipment. Dimensions of the taper section of replacement handles shall conform to figure 3.

TABLE I.—*Dimensions for long handles (except telegraph shovels and telegraph spoons and snow pushers)*

Diameter adjacent to straps or sockets		Smallest diameter adjacent to top of knob end		Diameter of knob end	
Min.	Max.	Min.	Max.	Min.	Max.
Inches	*Inches*	*Inch*	*Inches*	*Inches*	*Inches*
1 1/16	1 5/16	1	1 1/16	1 5/8	1 9/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

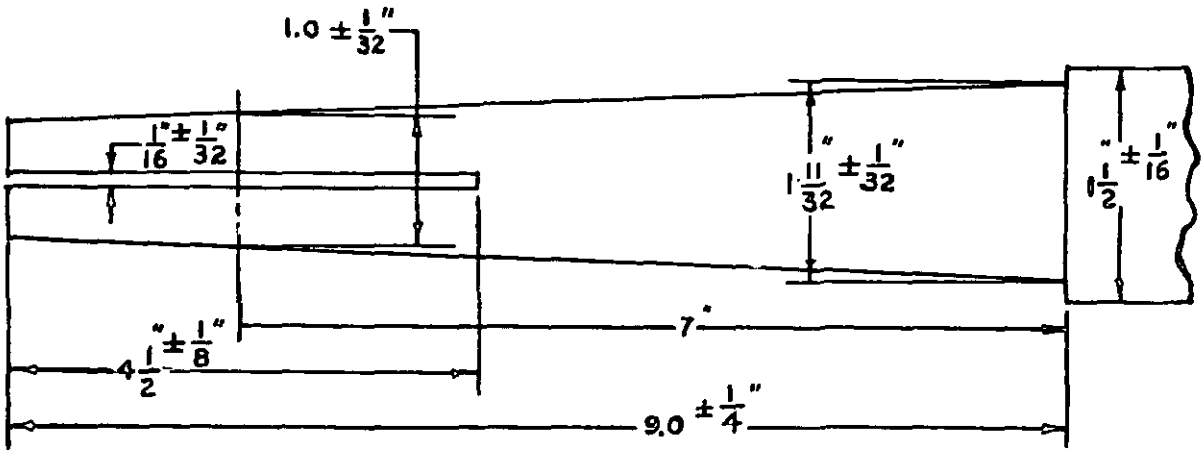


FIGURE 3.—Dimensions for taper section of replacement handles.

3.5.4 *Handle coating.* All portions of the handles shall be smoothly finished and shall be adequately covered with two durable coats of transparent lacquer or varnish or one coat after surface treatment utilizing heat, such as flame treating or charring. The coating shall be applied in a manner to permit visual inspection of the wood and to prevent absorption of water. The wood grip of steel tubular D-handles may be coated with pigmented lacquer.

3.6 **Identification marking.** All shovels, scoops, spades, spoons, and replacement handles shall be marked in a plain and permanent manner with the manufacturer's name, or with a trademark of such known character that the source of manufacture may be readily determined. Paint used as a symbol marking to identify the brand shall cover not more than 25 percent of the length of the handle.

3.7 **Type I scoop, break-down.** Type I, break-down scoop, shall be of an open back in accordance with 3.2.1. The scoop shall be furnished with a D-handle conforming to the requirements of 3.5.1.

3.7.1 *Blade.* The blade shall be diamond point and shall conform to 3.4. The shoulder edges shall be turned approximately 90 degrees to form a step.

3.7.2 Type I scoops shall conform to table II and shall be similar to figure 4.

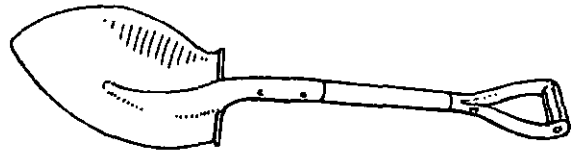


FIGURE 4.—Type I scoop, break-down.

TABLE II.—*Dimensions for type I scoop, break down*

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
5	11½	12	15½	16½	0.0673	7	23	28	17	21	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE III.—*Dimensions for type II scoop, eastern pattern*

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	12	12½	14⅝	15⅝	0.0598	7	26	28	17	21	16
4	12½	13	16⅛	17⅛	.0598	7	26	28	17	21	16
6	13	13½	17⅛	18⅛	.0598	7	26	28	17	21	16

3.8 Type II scoop, eastern pattern. Type II scoop shall be an open back in accordance with 3.2.1. The scoop shall be furnished with a D-handle conforming to the requirements of 3.5.1. Type II scoops shall conform to table III and shall be similar to figure 5.

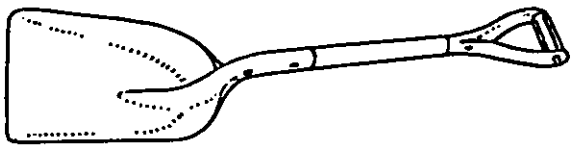


FIGURE 5.—Type II scoop, eastern pattern.

3.8.1 *Blade.* The blade shall be square point and shall conform to 3.4.

3.9 Type III *scoop, sand and gravel.* Type III sand and gravel scoop shall be an open back in accordance with 3.2.1. The scoop shall be furnished with a D-handle conforming to the requirements of 3.5.1.

3.9.1 *Blade.* The blade shall be round point in accordance with 3.4. The shoulder edges of the blade shall be turned to approximately 90 degrees to form a step.

3.9.2 Type III scoop, sand and gravel, shall conform to table IV and shall be similar to figure 6.



FIGURE 6.—Type III scoop, sand and gravel.

3.10 Type IV shovel, round point.

3.10.1 *Blades.* The blades for type IV shovels shall conform to the requirements of 3.4.

3.10.2 *Class A, D-handles.* Class A shovels shall be in accordance with the requirements of 3.5.1 and shall conform to the dimensions of table V.

3.10.2.1 *Style 1, open back.* Style 1 shovel shall be in accordance with the requirements of 3.2.1 and shall be similar to figure 7. The shoulder edges of the blade shall be rolled to form a noncutting step.

TABLE IV.—*Dimensions for type III scoop, sand and gravel*

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	12⅛	12⅝	14⅝	15⅝	0.0598	7	26	28	17	21	16

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE V.—*Type IV, class A, shovel, round point, D-handle, styles 1, 2, 3 and 4*

Size No.	Blade					Length of socket or strap D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	9½	10¼	11½	12½	0.0747	8¾	26	28	17	21	14

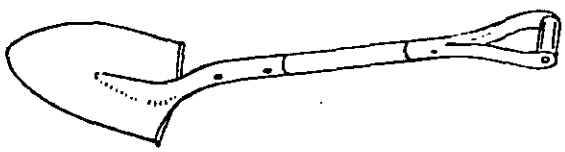


FIGURE 7.—Type IV, class A, style 1, round point, D-handle, open back.

3.10.2.1.1 *Replacement handles.* Replacement handles for style 1 shovel shall conform to the requirements of 3.5.1 and 3.5.3.

3.10.2.2 *Style 2, closed back.* Style 2 shovel shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 8. The shoulder edge of the blade shall be rolled to form a noncutting step.




FIGURE 8.—Type IV, class A, style 2, round point, D-handle, closed back.

3.10.2.3 *Style 3, solid shank.* Style 3 shovel shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 9.




FIGURE 9.—Type IV, class A, style 3, round point, D-handle, solid shank.

3.10.2.4 *Style 4, plain back.* Style 4 shovel shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 10.




FIGURE 10.—Type IV, class A, style 4, round point, D-handle, plain back.

TABLE VI.—*Type IV, class B, shovel, round point, long handle, styles 1, 2, 3, and 4*

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
0	7¾	8¼	9½	10½	0.0747	8	36½	40½	27	31	14
2	9½	10¼	11½	12½	0.0747	8¾	46	52	29	33	14
4	10¼	11½	12¾	14	0.0747	8¾	46	52	27	33	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

3.10.3 *Class B, long handles.* Class B shovels shall be in accordance with the requirements of 3.5.2 and shall conform to the dimensions of table VI.

3.10.3.1 *Style 1, open back.* Style 1 shovels shall be in accordance with the requirements of 3.2.1 and shall be similar to figure 11. The shoulder edges of the blade shall be rolled to form a noncutting step.




FIGURE 11.—Type IV, class B, style 1, round point, long handle, open back.

3.10.3.1.1 *Replacement handles.* Replacement handles for class B, style 1 shovels shall conform to the requirements of 3.5.2 and 3.5.3.

3.10.3.2 *Style 2, closed back.* Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 12. The shoulder edge of the blade shall be rolled to form a noncutting step.



FIGURE 12.—Type IV, class B, style 2, round point, long handle, closed back.

3.10.3.3 *Style 3, solid shank.* Style 3 shovel shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 13.




FIGURE 13.—Type IV, class B, style 3, round point, long handle, solid shank.

3.10.3.4 *Style 4, plain back.* Style 4 shovels shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 14.



FIGURE 14.—Type IV, class B, style 4, round point, long handle, plain back.

3.11 Type V shovel, square point.

3.11.1 *Blades.* The blades for type V shovels shall conform to the requirements of 3.4.

3.11.2 *Class A, D-handle.* Class A shovels shall be in accordance with the requirements of 3.5.1 and shall conform to the dimensions of table VII.

3.11.2.1 *Style 1, open back.* Style 1 shovels shall be in accordance with the requirements of 3.2.1 and shall be similar to figure 15. The shoulder edges of the blade shall be rolled to form a noncutting step.

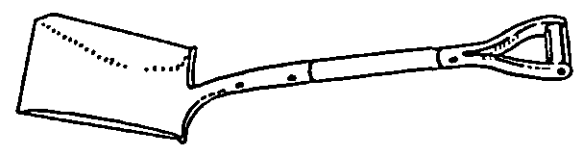


FIGURE 15.—Type V, class A, style 1, square point, D-handle, open back.

TABLE VII.—*Type V, class A, shovel, square point, D-handle, styles 1, 2, 3 and 4*

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	9½	10¼	11½	12⅛	0.0747	8¾	28	28	17	21	14
4	10½	11¼	12⅝	13¾	0.0747	8¾	26	28	17	21	14

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE VIII.—*Type V, class B, shovel, square point, long handle, styles 1, 2, 3 and 4*

Size No.	Blade					Length of socket or strap D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	9½	10¼	11½	12½	0.0747	8¾	46	52	29	33	14

3.11.2.1.1 *Replacement handles.* Replacement handles for style 1 shovels shall conform to the requirements of 3.5.1 and 3.5.3.

3.11.2.2 *Style 2, closed back.* Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 16. The shoulder edges of the blade shall be rolled to form a noncutting step.

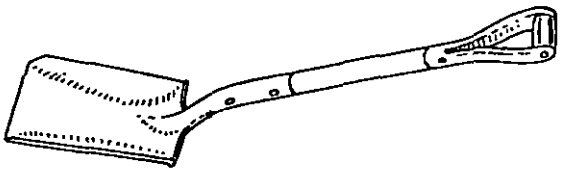


FIGURE 16.—Type V, class A, style 2, square point, D-handle, closed back.

3.11.2.3 *Style 3, solid shank.* Style 3 shovel shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 17.

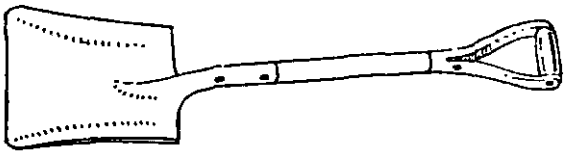


FIGURE 17.—Type V, class A, style 3, square point, D-handle, solid shank.

3.11.2.4 *Style 4, plain back.* Style 4 shovel shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 18.

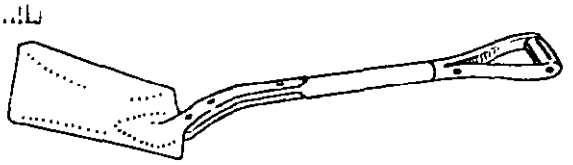


FIGURE 18.—Type V, class A, style 4, square point, D-handle, plain back.

3.11.3 *Class B, long handles.* Class B shovels shall be in accordance with the requirements of 3.5.2 and shall conform to the dimensions of table VIII.

3.11.3.1 *Style 1, open back.* Style 1 open back shall be in accordance with the requirements of 3.2.1 and shall be similar to figure 19. The shoulder edges of the blade shall be rolled to form a noncutting step.



FIGURE 19.—Type V, class B, style 1, square point, long handle, open back.

3.11.3.1.1 *Replacement handles.* Replacement handles for style 1 shovels shall conform to the requirements of 3.5.2 and 3.5.3.

3.11.3.2 *Style 2, closed back.* Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 20. The shoulder edges of the blade shall be rolled to form a noncutting step.




FIGURE 20.—Type V, class B, style 2, square point, long handle, closed back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE IX.—*Type VI, molders' shovels, styles 1, 2, 3 and 4*

Size No.	Blade					Length of socket or strap	Handle				Gage of steel
	Width A		Length B		Thickness C	D	Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	9½	10¾	11⅝	12½	0.0673	8	26	28	17	21	15

3.11.3.3 *Style* 3, *solid shank.* Style 3 shovels shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 21.




FIGURE 21.—Type V, class B, style 3, square point, long handle, solid shank.

3.11.3.4 *Style* 4, *plain back.* Style 4 shovels shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 22.




FIGURE 22.—Type V, class B, style 4, square point, long handle, plain back.

3.12 Type VI shovel, molders'.

3.12.1 *Blade.* The blades shall conform to the requirements of 3.4.

3.12.2 *Handle.* The handles shall be in accordance with 3.5.1.

3.12.3 Type VI molders' shovel shall conform to the dimensions of table IX.

3.12.4 *Style* 1, *open back.* Style 1 shovels shall be in accordance with the requirements of 3.2.1 and shall be similar to figure 23.

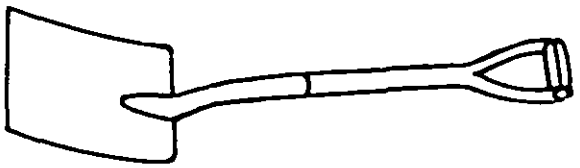


FIGURE 23.—Type VI, style 1, shovel, molders', open back.

3.12.5 *Style* 2, *closed back.* Style 2 shovels shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 24.

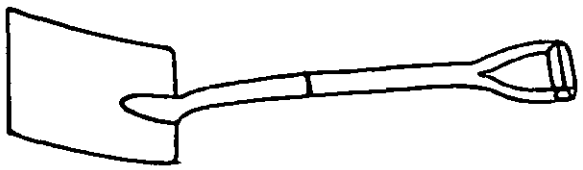


FIGURE 24.—Type VI, style 2, shovel, molders', closed back.

3.12.6 *Style* 3, *solid shank.* Style 3 shovels shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 25.

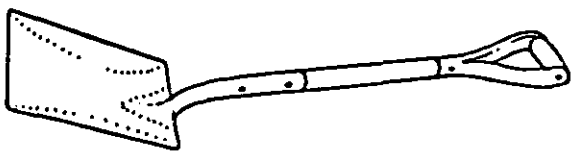


FIGURE 25.—Type VI, style 3, shovel, molders', solid shank.

3.12.7 *Style* 4, *plain back.* Style 4 shovels shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE X.—*Type VII, class A shovel, snow or barn (general purpose) D-handle*

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	11¾	12¼	13½	15	0.0598	5	26	28	17	21	16

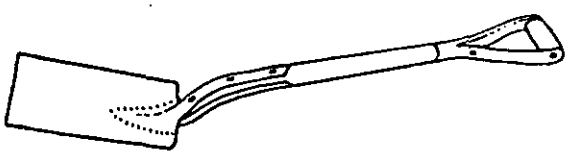


FIGURE 26.—Type VI, style 4, shovel, molders', plain back.

3.13 Type VII shovel, snow or barn (general purpose). Type VII shovels shall be of an open back in accordance with 3.2.1.

3.13.1 *Blade.* The blades shall conform to the requirements of 3.4.

3.13.2 *Class A, D-handle.* Class A shovels shall be in accordance with the requirements of 3.5.1, conform to the dimensions of table X, and shall be similar to figure 27.

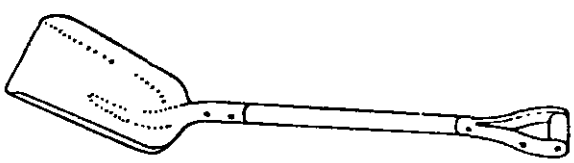


FIGURE 27.—Type VII, class A, shovel, snow or barn (general purpose), D-handle.

3.13.3 *Class B, long handle.* Class B shovels shall conform to the requirements of 3.5.2, conform to the dimensions shown in table XI, and shall be similar to figure 28.




FIGURE 28.—Type VII, class B, shovel, snow or barn (general purpose), long handle.

3.14 Type VIII shovel, telegraph.

3.14.1 *Blades.* The blades for type VIII telegraph shovels shall be plain back and shall conform to the requirements of 3.2.4 and 3.4.

3.14.2 *Handles.* The handles for type VIII shovels shall conform to the requirements of 3.5. The top side of the handles shall indicate in a plain and permanent manner the gage depth or footage marks. The gage depth or footage mark divisions shall advance from the cutting edge point of the blade and be clearly and permanently numbered to indicate the depth in feet. Marking

TABLE XI.—*Type VII, class B, shovel, snow or barn (general purpose) long handle*

Size No.	Blade					Length of socket D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	11¾	12¼	13½	15	0.0598	5	46	52	27	31	16

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the currentversion before use.

TABLE XII.—*Type VIII shovel, telegraph*

Size No.	Blade					Length of strap D	Handle length E		Gage of steel
	Width A		Length B		Thickness C				
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	9⅝	10¼	11⅝	12½	0.0897	22	93	99	13
2	9⅝	10¼	11⅝	12½	.0897	22	117	123	13

for the eight-foot handles shall start at four feet from the cutting edge point of the blade and advance in increments of one foot up to and including the seven-foot mark. The markings for the ten-foot handles shall start at five feet from the cutting edge point of the blade and advance in increments of one foot up to and including the nine-foot mark. The diameter of the handles adjacent to the straps shall be not less than 1-3/4 inches. The diameter of the handle at the knob end shall be not less than 1-3/8 nor more than 1-1/2 inches.

3.14.3 Type VIII shovels shall conform to the dimensions of table XII.

3.14.4 *Class A, straight handle.* Class A shovels shall be similar to figure 29.




FIGURE 29.—Type VIII, class A, shovel, telegraph, straight handle.

3.14.5 *Class B, bent handle.* Class B, bent-handle shovels shall be similar to figure 30.




FIGURE 30.—Type VIII, class B, shovel, telegraph, bent handle.

3.15 Type IX spade, ditch or post.

3.15.1 *Blade.* The blades shall conform to the requirements of 3.4. The shoulder edges of the blade shall be provided with a non-cutting step.

3.15.2 *Handle.* The handles shall conform to the requirements of 3.5.1.

3.15.3 Type IX spade shall conform to the dimensions of table XIII.

3.15.4 *Style 1, closed back.* Style 1 spades shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 31.

TABLE XIII.—*Type IX spade, ditch or post, styles 1, 2 and 3*

Size No.	Blade					Length of socket or strap D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
14	6½	7¼	13½	14½	0.0747	8	26	29	5	7½	14
16	6½	7¼	15½	16½	0.0747	8	26	29	5	7½	14

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.



FIGURE 31.—Type IX, style 1, spade, ditch or post, closed back.

3.15.5 *Style 2, solid shank.* Style 2 spades shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 32.



FIGURE 32.—Type IX, style 2, spade, ditch or post, solid shank.

3.15.6 *Style 3, plain back.* Style 3 spades shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 33.



FIGURE 33.—Type IX, style 3, spade, ditch or post, plain back.

3.16 Type X spade, drain.

3.16.1 *Blade.* The blades shall conform to the requirements of 3.4. The shoulder edges of the blade shall be provided with a noncutting step.

3.16.2 *Handle.* The handles shall conform to the requirements of 3.5.1.

3.16.3 Type X spades shall conform to the dimensions of table XIV.

3.16.4 *Style 1, closed back.* Style 1 spades shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 34.




FIGURE 34.—Type X, style 1, spade, drain, closed back.

3.16.5 *Style 2, solid shank.* Style 2 spades shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 35.




FIGURE 35.—Type X, style 2, spade, drain, solid shank.

3.16.6 *Style 3, plain back.* Style 3 spades shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 36.



FIGURE 36.—Type X, style 3, spade, drain, plain back.

3.17 Type XI spade, garden.

3.17.1 *Blade.* The blades for type XI spades shall conform to the requirements of 3.4. The shoulder edges of the blade shall be provided with a noncutting step.

TABLE XIV.—*Type X spade, drain, styles 1, 2 and 3*

Size No.	Blade					Length of socket or strap D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	6⅝	6⅝	15½	13½	0.0[illegible]47	8	26	28	5	7½	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XV.—*Type XI, class A, spade, garden, D-handle, styles 1, 2, 3, and 4*

Size No.	Blade					Length of socket or strap D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	7	8	11⅝	12¾	0.0697 or .0747	8¾	28	28	9½	12½	13 or 14

3.17.2 *Class A, D-handles.* Class A spades shall be in accordance with the requirements of 3.5.1 and shall conform to the dimensions of table XV.

3.17.2.1 *Style 1, open back.* Style 1 spade shall be in accordance with the requirements specified in 3.2.1 and shall be similar to figure 37.



FIGURE 37.—Type XI, class A, style 1, spade, garden, D-handle, open back.

3.17.2.1.1 *Replacement handles.* Replacement handles for style 1 spades shall conform to the requirements of 3.5.1 and 3.5.3.

3.17.2.2 *Style 2, closed back.* Style 2 spade shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 38.




FIGURE 38.—Type XI, class A, style 2, spade, garden, D-handle, closed back.

3.17.2.3 *Style 3, solid shank.* Style 3 spade shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 39.




FIGURE 39.—Type XI, class A, style 3, spade, garden, D-handle, solid shank.

3.17.2.4 *Style 4, plain back.* Style 4 spade shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 40.

TABLE XVI.—*Type XI, class B, spade, garden, long handle, styles 1, 2, 3, and 4*

Size No.	Blade					Length of socket or strap D	Handle				Gage of steel
	Width A		Length B		Thickness C		Length E		Lift F		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
2	7	8	11⅝	12¾	0.0697 or 0.0747	8¾	48	52	15	20	13 or 14

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.



FIGURE 40.—Type XI, class A, style 4, spade, garden, D-handle, plain back.

3.17.3 *Class B, long handle.* Class B spade shall be in accordance with the requirements of 3.5.2 and shall conform to the dimensions of table XVI.

3.17.3.1 *Style 1, open back.* Style 1 spade shall be in accordance with the requirements of 3.2.1 and shall be similar to figure 41.




FIGURE 41.—Type XI, class B, style 1, spade, garden, long handle, open back.

3.17.3.1.1 *Replacement handles.* Replacement handles for style 1 open back shall conform to the requirements of 3.5.2 and 3.5.3.

3.17.3.2 *Style 2, closed back.* Style 2 spade shall be in accordance with the requirements of 3.2.2 and shall be similar to figure 42.




FIGURE 42.—Type XI, class B, style 2, spade, garden, long handle, closed back.

3.17.3.3 *Style 3, solid shank.* Style 3 spade shall be in accordance with the requirements of 3.2.3 and shall be similar to figure 43.




FIGURE 43.—Type XI, class B, style 3, spade, garden, long handle, solid back.

3.17.3.4 *Style 4, plain back.* Style 4 spade shall be in accordance with the requirements of 3.2.4 and shall be similar to figure 44.




FIGURE 44.—Type XI, class B, style 4, spade, garden, long handle, plain back.

3.18 Type XII spoon, telegraph, eastern pattern.

3.18.1 *Blades.* The blades shall be plain back and shall conform to the requirements of 3.2.4 and 3.4.

3.18.2 *Handles.* The handles shall be in accordance with 3.5 and conform to the requirements of 3.14.2.

3.18.3 *Type XII spoons shall conform to* the dimensions of table XVII and shall be similar to figure 45.




FIGURE 45.—Type XII, spoon, telegraph, eastern pattern.

TABLE XVII.—*Type XII, spoon, telegraph, eastern pattern*

Size No.	Blade.					Length of strap D	Handle		Gage of steel
	Width A		Length B		Thickness C		Length E		
	Min.	Max.	Min.	Max.	Nominal	Min.	Min.	Max.	
	Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	
A	9⅝	10	11½	12½	0.0897	22	93	99	13
B	9⅝	10	11½	12½	.0897	22	117	123	13

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XVIII.—*Type XIV, class A, shovel, snow, D-handle, light weight.*

Handle (assembled)		Width of blade A	Height of blade	Weight[1]	
Min.	Max.	Min.	Min.	Min.	Max.
Inches	*Inches*	*Inches*	*Inches*	*Pounds*	*Pounds*
28	31	16	13	3¼	3⅝
32	34	17	14	3⅝	4

[1] Weight includes the handle.

3.19 Type XIV shovel, snow, D-handle. Type XIV shovel shall be furnished with a suitable D-handle. At the option of the manufacturer, type XIV shovels shall be either of the assembled type or knockdown type. The handle of the assembled type shall be permanently affixed with at least one rivet, or at least two nails. The handle of the knockdown type shall be so constructed that when assembled by tamping, or other method without the use of tools, it shall not loosen, turn, slip, or become completely detached from the blade and socket under the most severe snow shoveling conditions.

3.19.1 *Class A, lightweight.* Class A shovel shall have a blade made either of aluminum alloy, magnesium, or similar lightweight sheet metal. The blade shall be square point and either ribbed or plain. The square point shall have a steel wear strip riveted on the back of the blade to reinforce the corners and edge. The socket shall be a separate preformed piece of steel either welded or riveted to the back of the blade. The shovels shall conform to table XVIII and shall be similar to figure 46.

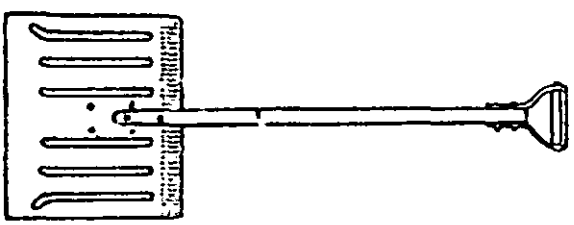


FIGURE 46.—Type XIV shovel, snow, D-handle.

Class A.—Lightweight.
Class B.—Medium weight.

3.19.2 *Class B, medium weight.* Class B shovel shall have a blade made of sheet steel not less than 18 gage (.0478 inch nominal thickness). The blade shall be square point and either ribbed or plain. The socket shall be a separate preformed piece of steel either welded or riveted to the back of the blade. The shovels shall conform to table XIX and shall be similar to figure 46.

3.20 Type XV pusher, snow, long handle. Type XV pusher shall be furnished with a long handle conforming to the requirements of 3.5.2. At the option of the manufacturer, type XV snow pushers shall be either of the assembled type or knockdown type. The handle of the assembled type shall be permanently affixed by at least one rivet, nail, or similar fastener(s). The handle of the knockdown type shall be so constructed that when assembled by tamping or other method without the use of tools, it shall not loosen or turn under the most severe snow pushing conditions. The handle shall be not less than 1-1/8 inches on its largest diameter.

3.20.1 *Class A, lightweight.* Class A snow pusher shall have a blade made either of aluminum alloy, magnesium, or similar lightweight sheet metal. The blade shall be square point and shall have a steel wear strip and socket in accordance with 3.19.1. The snow pushers shall conform to table XXI and shall be similar to figure 47.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

TABLE XIX.—*Type XIV, class B, shovel, snow, D-handle, medium weight.*

Handle (assembled)		Width of blade A	Height of blade	Weight[1]	
Min.	Max.	Min.	Min.	Min.	Max.
Inches	*Inches*	*Inches*	*Inches*	*Pounds*	*Pounds*
28	31	16	13	4	5⅝
32	34	17	14	5	7

[1] Weight includes the handle.

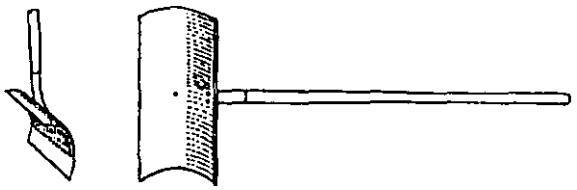


FIGURE 47.—Type XV, pusher, snow, long handle.

Class A.—Lightweight.
Class B.—Medium weight.

3.20.2 *Class B, medium weight.* Class B snow pusher shall have a blade made of sheet steel. The blade shall be square point and shall have a steel socket in accordance with 3.19.1. The steel in the socket shall be not less than 16 gage (0.0598-inch nominal thickness). The snow pushers shall conform to table XXII and shall be similar to figure 47.

3.21 **Workmanship.** Workmanship shall be first class and equal in every respect to the best commercial practice. The shovels, scoops, spades and spoons shall be free from rust, fins, burrs, or other imperfections which may impair their appearance, durability or serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Sampling for quality conformance inspection.** Sampling for quality conformance inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.2.1 *Intermediate testing.* Hardness tests shall be performed as specified in 4.4.1, prior to the application of paint, to determine compliance with applicable requirements. Any reading not within specified values shall be classified a defect. A lot shall consist of blades heat treated as a batch or under the same process and control. The sample unit shall be one shovel. The inspection level shall be level L4, with an acceptable quality level of 1.5 defects per hundred units.

4.2.2 *Inspection of the end item.* Inspection of the shovels shall be performed as specified in the following paragraphs. A lot shall consist of shovels of the same type, class, and style. The sample units shall be one completely fabricated and assembled shovel.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the currentversion before use.

TABLE XXI.—*Type XV, class A, Pusher, snow, long handle, light weight.*

Over-all length (assembled)		Width of blade A		Height of blade		Weight[1]	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Pounds*	*Pounds*
53	72	17½	18½	10½	12	3½	4½
55	72	23½	24½	10½	12	4½	5½

[1] Weight includes the handle.

TABLE XXII.—*Type XV, class B, pusher, snow, long handle, medium weight.*

Over-all length (assembled)		Width of blade A		Height of blade		Weight[1]	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Inches	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Pounds*	*Pounds*
53	72	17½	18½	10½	12½	5¼	6¾
53	72	19½	20½	10½	12½	5¾	7⅜
55	72	23½	24½	7	10	4⅝	6
55	72	23½	24½	10½	12½	6⅜	8

[1] Weight includes the handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

4.2.2.1 *Visual examination.* Each sample unit shall be visually examined for the defects set forth below. The inspection level shall be level II, with an acceptable quality level of 4.0 defects per hundred units.

4.2.2.2 *Dimensional examination.* Each sample unit shall be examined for dimensions specified in applicable paragraphs and tables. Any deviation therefrom shall constitute a defect. The inspection level shall be level L4, with an acceptable quality level of 4.0 defects per hundred units.

Examination	Defects
Design	Not type, class or style specified.
Material	Not fabricated from specified material.
Finish	Not type specified. Dirt, grit or foreign matter imbedded in finish.
Construction and workmanship	Any component part missing. Any component not properly assembled. Fractured, split, malformed, or otherwise impaired effecting serviceability. Sharp burr or sliver.
Marking	Missing, incomplete, not legible.

4.3 **Testing.** Each sample unit shall be tested as specified in 4.4.1 through 4.4.3, as applicable. Any determination not within specified requirements shall constitute a defect. The inspection level shall be L4, with an acceptable quality level of 4.0 defects per hundred units.

4.4 **Test procedures.**

4.4.1 *Hardness test.* Each sample shovel, scoop, spade, and telegraph spoon selected in accordance with 4.2.1 shall be tested to determine compliance with applicable requirements specified in 3.4.2. Care should be exercised in supporting the blade so that no movement will occur and the surface under test will be horizontal whereby accurate readings may be obtained.

4.4.2 *Strength test.* All sample tools selected, except type XII telegraph spoons, shall be subjected to the strength test.

4.4.2.1 *Strength test for long-handled tools, except type XV.* The strength test for long-handled tools, except type XV, shall be tested as illustrated in figure 48. The blade shall be securely clamped and a measurement of the vertical distance (D) made before applying the load. A 175- to 176-pound weight shall then be applied to the handle at point (D) for not less than 120 nor more than 125 seconds. The weight shall then be removed and a remeasurement taken of ver-

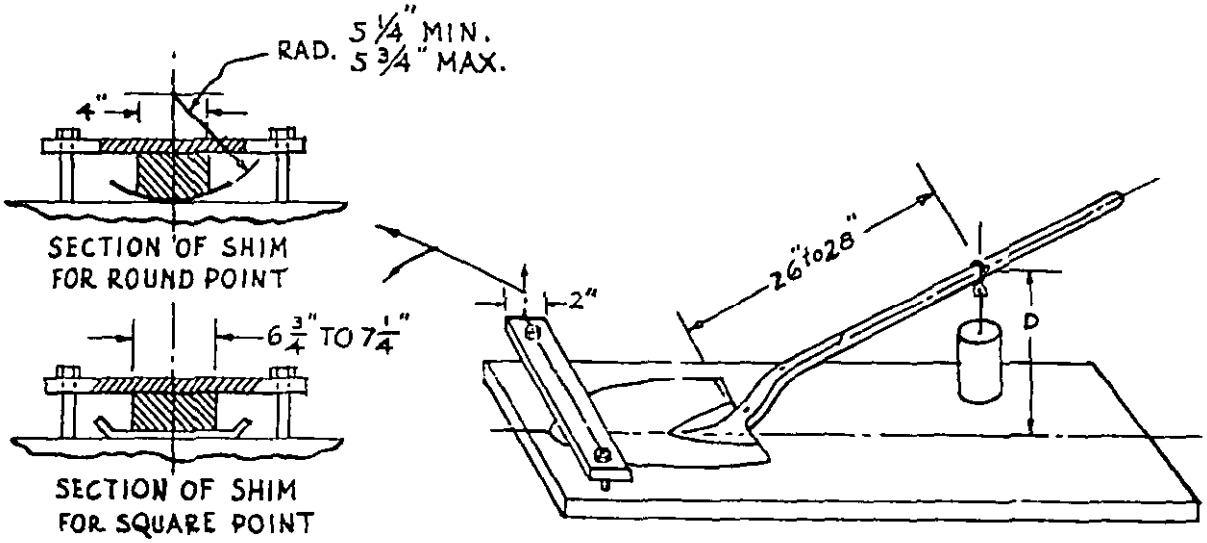


FIGURE 48.—Method of applying test load.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

tical distance (D). The difference before and after the weight application is the amount of set or bend. Failure is deemed to have occurred when the tool fractures, breaks, or when a permanent bend or set has exceeded 1 inch.

4.4.2.2 *Strength test for type VII shovels.* The strength test for type VII shovels shall be in accordance with 4.4.2.1 except a 125- to 126-pound weight shall be applied to the handle at point (D).

4.4.2.3 *Strength test for D-handled tools, except type XIV.* Strength test for D-handled tools, except type XIV, shall be in accordance with 4.4.2.1 except that the load shall be applied to the handle grip.

4.4.2.4 *Strength test for types XIV and XV snow tools.* The strength test for types XIV and XV snow tools shall be in accordance with 4.4.2.1 except that a 25-pound test load for class A tools and a 50-pound test load for class B tools shall be used and applied to the handle at a point 24 inches from the top edge of the blade. For this test, the blade shall be clamped securely as illustrated in figure 48 at a point 3 inches from the point edge and the blade shall be supported directly under the socket end of the handle.

4.4.3 *Balance test for types IV and V shovels.* The balance test for types IV and V shovels shall be tested as illustrated in figure 49. The fixture employed to determine the static balance shall consist of a table or plate with two steel strips, each having a knife edge and mounted in such a manner that the knife edges of the steel strips are upright in a vertical position. The shovel shall be placed on the knife edges of the steel strips as illustrated and the blade of shovel shall balance in the upright position. The load in pounds required to rotate each shovel 180 degrees from the upright position about the longitudinal axis passing through the center of the handle shaft shall be not less than 1-3/4 pounds.

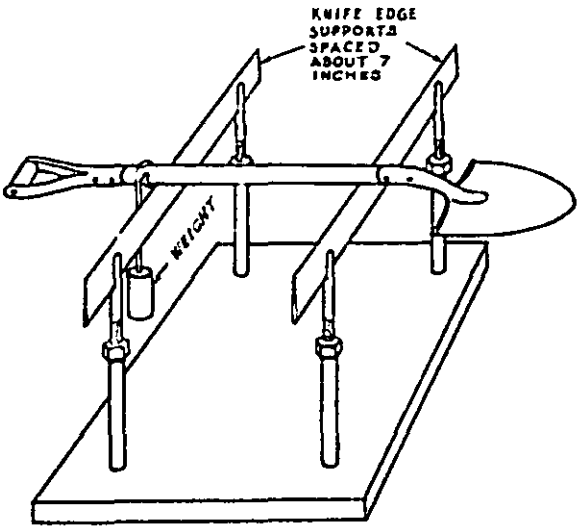


FIGURE 49.—Fixture for determining static balance.

4.5 Inspection of preparation for delivery. Unless otherwise specified, inspection to determine compliance with preparation for delivery requirements shall be accomplished in accordance with MIL-H-15424.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 Cleaning, preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 *Level A.* Shovels, scoops, spades and telegraph spoons shall be preserved and packaged in accordance with level A of MIL-H-15424.

5.1.2 *Level C.* Cleaning, preservation and packaging shall be in accordance with the supplier's commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2). Types XIV and XV, knockdown type snow tools, shall be packed six of a kind in a container.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

5.2.1 *Level A.* Shovels, scoops, spades and telegraph spoons, packaged as specified (see 5.1), shall be packed in accordance with the level A requirements of MIL-H-15424.

5.2.2 *Level B.* Shovels, scoops, spades and telegraph spoons, packaged as specified (see 5.1), shall be packed in accordance with level B requirements of MIL-H-15424.

5.2.3 *Level C.* Shovels, scoops, spades, and telegraph spoons, cleaned, preserved, and packaged as specified (see 5.1), shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers or bundles shall be in accordance with rules or regulations as applicable to the mode of transportation. When tools are not packaged in containers, they shall be bundled in sets and the shanks and handles wired, strapped, or sizal tied. If wired or strapped, the handles shall be protected by burlap or heavy paper under the wires or straps. If sizal tied, each piece of sizal twine shall pass around tools at least twice and then be tied so as to prevent slippage. The sizal twine shall be at least 3 ply.

5.3 **Marking.**

5.3.1 *Military agencies.* In addition to any special marking required by the contract or order, or herein, interior packages and exterior shipping containers shall be marked in accordance with MIL-H-15424.

5.3.2 *Civil agencies.* In addition to any special marking required by the contract or order, interior and exterior shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 **Intended use.** The shovels, scoops, spades, snow pushers, and telegraph spoons covered by this specification are intended to be used, where applicable, in handling loose and bulky materials such as dirt, sand, gravel, grain, and snow.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type, class, and style of tool required (1.2.1).

(*c*) Size of tool required (see applicable tables).

(*d*) Applicable levels of preservation, packaging, and packing (5.1 and 5.2).

(*e*) Marking, if different (see 5.3).

6.2.1 *Replacement handles.* When replacement handles are required specify the following:

(*a*) Type, class, and style tool for which required (3.10.2.1.1, 3.10.3.1.1, 3.11.2.1.1, 3.11.3.1.1, 3.17.2.1.1 and 3.17.3.1.1).

(*b*) Quantity required.

6.2.1.1 *Recommendation.* It is recommended that no replacement handles, other than those listed in 6.2.1, be procured for Government stock because of the problem of fitting handles which have not been standardized for interchangeability.

6.3 The requirements for handles (see 3.5), are in accordance with Simplified Practice Recommendation R76-40. Other requirements of this specification are in accordance with Simplified Practice Recommendation R48-42, insofar as is practicable.

6.4 **Superseding data.** Type XIII shovel, fire fighter, of GGG-S-326a, dated February 23, 1951, has been deleted from this specification.

6.5 **Transportation description.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Shovels, spades, or scoops, not otherwise indexed by name, steel, or steel and wood combined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:

Shovels, spades, or scoops, not otherwise indexed, steel, or steel and wood combined.

Truckload minimum weights:
Handles attached—16,000 pounds.
Handles detached—20,000 pounds.

Subject to Rule 115, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto

MILITARY CUSTODIANS:

Army—GL

Navy—Sh

Air Force—MOA

☆ U.S. GOVERNMENT PRINTING OFFICE: 1963—[illegible]/117

Copies of this specification may be purchased for 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the current version before use.