GGG-S-665c
August 20, 1963

SUPERSEDING
Int. Fed. Spec. GGG-S-00665b (NAVY-Ships)
January 31, 1961 and
Fed. Spec. GGG-S-665a
January 12, 1954

FEDERAL SPECIFICATION

STRIPPER, CABLE, HAND; AND STRIPPER, WIRE, HAND

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers cable strippers for use on armored and unarmored cable, and wire strippers for use on solid and stranded wire.

1.1.1 *Federal specification coverage.* This specification does not cover all types and classes of strippers, but only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes, and styles.* Strippers shall be of the following types, classes, and styles as specified (see 6.2):

Type I.—Cable strippers, adjustable toggle handle.

Type II.—Wire strippers.
- Class 1.—Floating handles.
- Class 2.—Pivot handles.
  - Style A.—For general purpose insulation.
  - Style B.—For polytetrafluoroethylene insulation (200°C., 600 volts).
  - Style C.—For polytetrafluoroethylene insulation (200°C., 1,000 volts).
- Class 3.—Flat jaws and handles.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-H-15424—Hand Tools; Packaging of.
MIL-W-16878—Wire, Electrical, Insulated, High Temperature.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are descriptive, and not restrictive, and are not intended to preclude the purchase of strippers otherwise conforming to this specification.

3.2 Material. Material used in the construction of strippers shall be sound, of uniform quality and condition to provide ample strength, and shall conform in composition, heat treatment, and suitability to preclude misalignment of cutting blades, handles, or parts when subjected to hard usage. Parts subject to wear shall be suitably hardened. All metal parts (except the blades) shall be of a corrosion-resistant type, unless otherwise suitably protected to resist corrosion during normal service life.

3.3 Design. The strippers shall be of the latest design, afford a comfortable grip, and shall remove insulation in a neat and uniform manner without injury to the conductor. Rivets and pins when used shall be of steel, and shall be so secured that looseness adversely affecting operation will not develop under hard usage. Means shall be provided to prevent shifting of the blades, thereby maintaining center alignment of cutting edges of the blades. The blades shall be securely held to the tool assembly by screw or other methods to permit easy removal and replacement. All springs shall be manufactured of high-quality steel properly hardened and tempered in accordance with standard practice. Means shall be provided for removal and replacement of all springs. Screws shall be installed with an adequate means for preventing loss of proper tightness and adjustment.

3.3.1 *Repair parts.* The successful bidders supplying strippers shall make available and furnish repair parts when requested. All parts having the same manufacturer's part number shall be constructed to definite standards, tolerances, and clearances, in order that such parts may be completely interchangeable, replaced, or adjusted without requiring modification.

3.4 Finish. Unless otherwise specified (see 6.2), the strippers shall be finished in accordance with the manufacturer's standard practice.

3.5 Marking. All strippers shall be marked in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.6 Type I, cable stripper, adjustable toggle handle. Type I stripper bodies shall be of forged or pressed high-quality steel. Type I strippers shall be capable of both longitudinal and circumferential stripping of heavy-duty armored cable from 3/8 to 1-3/4 inches in diameter and through insulation 1/4 inch in thickness. Type I strippers shall consist essentially of a frame, adjustable locking handle, cable rest, and adjustable cutting mechanism.

3.6.1 *Frame.* The frame shall be of sturdy construction.

3.6.2 *Adjustable locking handle.* The adjustable handle shall be so designed that the handle may be locked in any desired position within the range of the tool. When

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

locked, the handle shall remain in position without further adjustment until intentionally released. In any locked position, the adjustable handle in conjunction with the frame shall provide a comfortable handgrip. The adjustable handle shall be so constructed and secured to the frame that excessive looseness or play will not develop under hard usage.

3.6.3 *Cable rest.* The cable rest may be an integral part of the frame or securely attached thereto, and shall be shaped so as to satisfactorily accommodate the full range of cable sizes without binding.

3.6.4 *Adjustable cutting mechanism.* The cutting mechanism shall consist essentially of a replaceable blade and indexing head, and shall be provided with means for adjustment of the depth of cut. The indexing head shall be capable of indexing the blade so that both cutting edges of the blade can be used and shall be further capable of indexing either blade cutting edge for longitudinal or circumferential cuts. The blade adjustment shall provide for positive depth adjustment and be capable of maintaining the required depth of cut until altered. The blade shall be smoothly finished and the cutting section hardened to a Rockwell reading of 45 to 50 on the C scale. Means shall be provided to prevent accidental disassembly of the cutting mechanism from the tool.

3.6.5 Type I cable stripper shall be similar to figure 1.

3.7 Type II, wire strippers.

3.7.1 *Class 1, floating handles.* Class 1 strippers shall be capable of removing a minimum of 3/4-inch length of insulation from conventional or general purpose solid and stranded wires. The insulation shall be cut smoothly, cleanly, and uniformly leaving the wire free from damage of any sort. Strippers shall incorporate a fast-operating mechanism requiring the exertion of a minimum pressure for insulation removal. Strippers shall consist essentially of a body and handles, cutting blades, serrated gripping jaws, and an automatic stop return.

3.7.1.1 *Body and handles.* The body and handles shall be of forged or pressed high-quality steel. The handles shall be so secured that looseness adversely affecting operation will not develop under hard usage.

3.7.1.2 *Cutting blades.* The cutting blades shall have a sufficient number of adequately spaced grooves to accommodate the range of wire sizes specified in table I without the necessity of making adjustment in any way. Blades shall be of high-quality steel, hardened, and shall have a smoothly ground finish. The blades shall possess a hardness of 53 to 59 on the Rockwell C scale or 87 to 90 on the 15 N scale (superficial). They shall be readily replaceable and shall be permanently and legibly marked with the gage sizes of the wires to be stripped in the applicable grooves. All the blade sizes specified in table I shall be interchangeable with

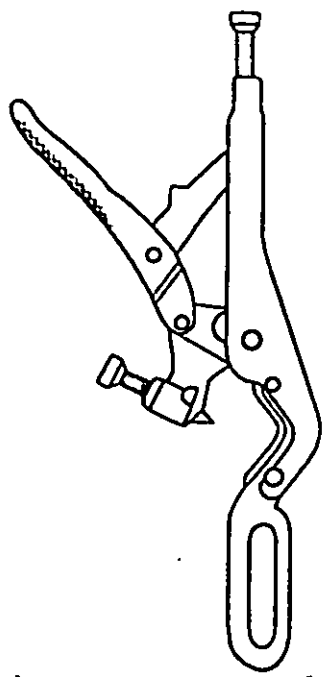


FIGURE 1.—Type I, cable stripper, adjustable toggle handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

the stripper of the same manufacturer. When specified (see 6.2) additional blades of the same size or of other sizes listed in table I shall be furnished.

Table I-Type II, class 1, blade sizes and capacity.

Size of blades	Range of wire sizes (A.W.G. and AN)	For stripping insulation
1	8, 10, 12 and 14	Solid and stranded
3	10, 12, 14, 16, 18, 20 & 22	Solid and stranded

3.7.1.3 *Serrated gripping jaws.* The jaws shall be of high-quality steel, and designed so as to firmly grip but not damage the wire insulation.

3.7.1.4 *Automatic stop return.* The strippers shall be provided with a device to stop return of the arms until after the stripped wire is removed, and shall be spring loaded to facilitate the return of the arms to the starting position when the handles are squeezed and released the second time. Action shall be such that fine and stranded wires will not be bent or mushroomed.

3.7.1.5 The overall length and handle spread shall not exceed the dimensions specified on figure 2, and the weight shall not exceed 1-1/4 pounds. Strippers shall be similar to figure 2 and equipped with blades conforming to one of the sizes shown in table 1.

3.7.2 *Class 2, pivot handles.* Class 2 strippers shall cut and strip insulation from the wire on the compression stroke, leaving the wire either fully or partially stripped and free from damage of any sort. The insulation shall be cut smoothly, cleanly and uniformly. The strippers shall incorporate precision cutting blades and a fast-operating mechanism requiring the exertion of a minimum of hand pressure for insulation removal.

3.7.2.1 *Style A, for general purpose insulation.* Class 2, style A strippers shall be capable of removing in a neat and uniform manner, without injury to the cable conductors, a minimum of 3/4 inch of insulation from free stripping wire such as low-and high-tension aircraft engine ignition cable, low-tension aircraft electrical cable, and general-purpose solid and stranded wire. Strippers shall consist essentially of a body, handles, cutting blades, serrated gripping jaws and automatic stop return.

3.7.2.1.1 *Body.* The body shall be of suitable material to provide ample strength, the construction being essentially the standard product of the manufacturer.

3.7.2.1.2 *Handles.* The handles shall be of a suitable material, and shall be so secured that looseness adversely affecting operation will not develop under hard usage.

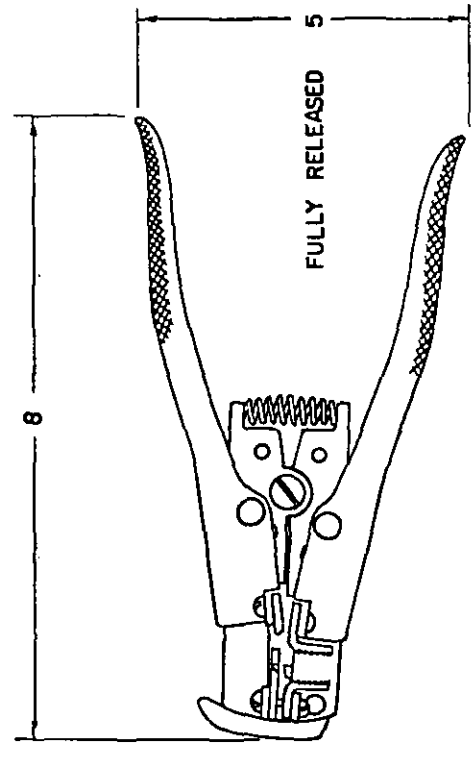


FIGURE 2.—Type II, class 1, wire stripper, floating handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

3.7.2.1.3 *Cutting blades.* The cutting blades shall be in accordance with 3.7.1.2, and the sizes shall be as specified in table II. All the blade sizes specified in table II shall be interchangeable with the stripper of the same manufacturer. When specified (see 6.2), additional blades of the same size or of other sizes specified in table II shall be furnished.

Table II-Type II, class 2, style A blade sizes and capacity.

Size of blade	Range of wire sizes (A.W.G. and AN)	For stripping insulation
1	8 and 10	Solid and stranded
4	8, 10, 12, 14, 16, 18, 20 and 22	Number 8 standard solid: number 10-22 solid and stranded
5	14, 16, 18, 20, 22, 24, 26, 28 and 30	Solid and stranded

3.7.2.1.4 *Serrated gripping jaws.* The jaws shall be in accordance with 3.7.1.3, except the stationary jaw may be of suitable metal other than steel.

3.7.2.1.5 *Automatic stop return.* The strippers shall be provided with a device to stop return of the arms until after the stripped wire is removed. The stripper shall release the wire from the gripping jaws on partial release of compression, and simultaneously hold the stripping jaws open to prevent crushing of the wire. Stripping and gripping jaws shall automatically return to the original stripping position as release of the compression is completed. Action shall be such that fine and stranded wires shall not be bent or mushroomed.

3.7.2.1.6 *Type II, class 2, style A strippers.* The overall length and handle spread shall not exceed the dimensions shown on figure 3 and the weight shall not exceed 14 ounces. Strippers shall be similar to figure 3 and equipped with blades conforming to one of the sizes shown in table II.

3.7.2.2 *Style B, for "Teflon" insulation, type E (200°C., 600 volts).* Class 2, style B

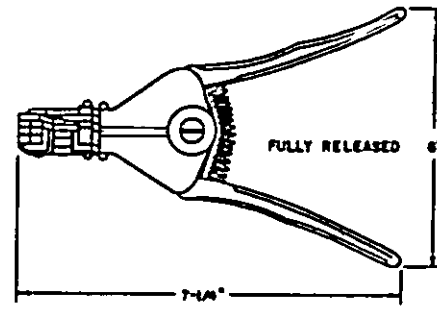


FIGURE 3.—Type II, class 2, style A wire stripper, pivot handles.

strippers shall be capable of removing polytetrafluoroethylene (Teflon) insulation from specialized types of wires such as type E of MIL-W-16878 which require an unusual amount of precision and rigidity in the stripping operation. Strippers shall consist essentially of a body, handles, cutting blades, gripping jaws, an automatic stop return, a short latch and a stripping length stop.

3.7.2.2.1 *Body.* The body shall be in accordance with 3.7.2.1.1.

3.7.2.2.2 *Handles.* The handles shall be in accordance with 3.7.2.1.2.

3.7.2.2.3 *Cutting blades.* The cutting blades shall have a sufficient number of adequately spaced grooves to accommodate the range of wire sizes specified in table III without the necessity of making adjustment in any way. Blades shall be of high-quality steel, properly hardened with a smoothly ground finish. The blades shall possess a hardness of 53 to 59 on the Rockwell C scale or 87 to 90 on the 15N scale (superficial). The blades shall be installed in matched pairs (upper and lower). Adequate blade support and blade guidance shall be provided to insure proper blade alignment when the upper and lower blades are closed on the wire. Blades shall be readily replaceable. The cutting blades shall be designed to both cut and accurately position the insulation immediately surrounding the particular place on the wire which is being

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

stripped. All the blade sizes specified in table III shall be interchangeable among strippers of the same manufacturer. When specified (see 6.2), additional blades of the same size or of other sizes listed in table III shall be furnished.

3.7.2.2.3.1 *Marking of blades.* Blades shall be permanently and legibly marked with the gage sizes of the applicable wires plainly visible on the face of the blades just above or adjacent to the applicable grooves. In order for the user to readily identify style B from style C strippers, the applicable size of blades shown in table III shall also be permanently and legibly marked in a plainly visible place on the blades for each style B stripper.

Table III-Type II, class 2, style B, blade sizes and capacity.

Size of blades	Range of wire sizes	For stripping insulation
1E	10, 12, 14 AN	Stranded
2E	16, 18, 20, 22, 24, 26 AN	Stranded
3E	26, 28, 30 AN	Stranded

3.7.2.2.4 *Gripping jaws.* Both gripping jaws shall be of high quality steel and each jaw shall provide a gripping face which will firmly grip, but not damage the wire insulation. The stationary gripping jaw shall lie in a plane approximately parallel to the centers of the stripping holes so that the wire to be stripped will be properly aligned with the applicable groove.

3.7.2.2.5 *Automatic stop return.* The automatic stop return shall be in accordance with 3.7.2.1.5.

3.7.2.2.6 *Short stop latch.* Strippers shall be provided with a short stop latch which may be easily engaged or disengaged, at the option of the user. When engaged, this short stop latch shall limit the strippers length of stroke to approximately 1/4 inch, so that the portion of the insulation on a wire usually stripped off may be severed but only partially removed. This separated piece of insulation may be left to temporarily protect the "stripped" end of the wire from damage, and may be removed by the operator's fingers when it is no longer needed. This short stop latch shall also incorporate a device which shall function within the limited stroke imposed by the short stop latch, and shall be similar to, but independent of the automatic stop return described in 3.7.2.1.5. When the short stop latch is disengaged, it shall in no way interfere with, or hinder the operation of the wire stripper.

3.7.2.2.7 *Stripping length stop.* A stripping length stop shall be provided so that the ends of wires may be stripped to a predetermined length, repeatedly. This stop shall be adjustable so that any desired stripping length from at least 1/4 inch through 1 inch range may be selected and easily set. This stop shall be constructed or designed so that no position in this stop's range will obstruct the operator's view of the grooves and markings on the cutting blades as they close on the wire.

3.7.2.2.8 *Type II, class 2 style B strippers.* The overall length and handle spread shall not exceed the dimensions shown on figure 4, and the weight shall not exceed one pound. Strippers shall be similar to figure 4 and equipped with blades conforming to one of the sizes shown in table III as specified (see 6.2).

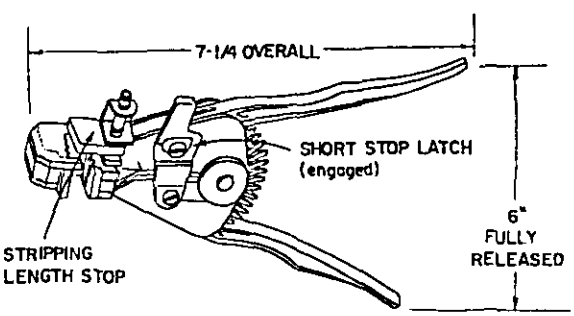


FIGURE 4.—Type II, class 2, style B wire stripper for "Teflon" insulation, type E.

3.7.2.3 *Style C, for "Teflon" insulation, type EE (200°C., 1000 volts).* Class 2, style C strippers shall be in accordance with

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:41Z
Check the source to verify that this is the current version before use.

3.7.2.2 through 3.7.2.2.7 except the jaws shall be especially designed for stripping "Teflon" insulation type EE of MIL-W-16878.

3.7.2.3.1 *Marking of blades.* Marking of blades shall be in accordance with 3.7.2.2.3.1 except that the applicable size of blades shown in table IV shall be marked on the blades for each style C stripper.

3.7.2.3.2 *Type II, class 2, style C strippers.* The overall length and handle spread shall not exceed the dimensions shown on figure 4, and the weight shall not exceed one pound. Strippers shall be similar to figure 4 and equipped with blades conforming to one of the sizes shown in table IV as specified (see 6.2).

Table IV-Type II, class 2, style C, blade sizes and capacity.

Size of blades	Range of wire sizes	For stripping insulation
1EE	10, 12, 12 AN	Stranded
2EE	16, 18, 20, 22, 24, 26 AN	Stranded
3EE	26, 28, 30 AN	Stranded

3.7.3 *Class 3, flat jaws and handles.* Class 3 strippers shall be fabricated using flat, one-piece, cutting jaw and handle construction. The joints shall serve as pivot points holding both halves of the strippers (cutting jaws and handles) together. These strippers shall be capable of removing insulation in a neat and uniform manner, from free stripping, general purpose, solid and stranded wire. The wire to be stripped shall be placed in the applicable groove size, the jaws closed against a positive stop and the insulation butt pulled off the conductor. Class 3 strippers shall be capable of withstanding the handle load test as specified in 4.4.2.4. Class 3 strippers shall consist essentially of cutting jaws and handles with insulated covering.

3.7.3.1 *Cutting jaws.* The cutting jaws shall be of steel and possess a hardness of from 53 to 59 on the Rockwell C scale. These cutting jaws shall provide various sized grooves suitable for stripping the type and range of wire sizes specified in table V. A separate groove size shall be provided for each gage size listed in table V and that size (number) shall be permanently and legibly marked into the jaw area adjacent to the applicable groove. Each groove shall be accurate for the size marked, and shall sever the insulation in its entirety without rotary motion of the tool. Each jaw shall also provide a straight, smooth cutting or shearing surface 5/16 inch long (minimum) along the portion of the jaw nearest the rivet, for wire cutting purposes. A hole approximately 1/8 inch in diameter and suitable for loop bending of stripped conductors shall be properly located in each jaw. Strippers shall be capable of withstanding the applicable tests in section 4 of this specification.

3.7.3.2 *Handles and insulated covering.* The handles of class 3 strippers shall be of steel and covered with a plastic type of insulated covering. This covering shall be approximately 1/16 inch thick and shall completely cover the ends and all four sides of the handles. Measured from the covered handle ends, the insulated covering shall extend up the handles at least 3-1/4 inches. This covering shall be of durable plastic and shall be capable of passing the flammability test in 4.4.2.3, and the dielectric strength test of 4.4.2.5.

3.7.3.3 *Joints.* Class 3 strippers shall have lap joints properly fitted to preclude looseness, but not too tight to prevent easy functioning during normal operation. Any binding which prevents opening with the backs of the fingers during one-hand operation shall be cause for rejection.

3.7.3.4 *Type II, class 3 strippers.* Class 3 strippers shall conform to the dimensions shown on and be similar to figure 5. The stripper shall also conform to size 1 or 2 as specified (see 6.2) and as shown in table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

Table V-Type II, class 3, sizes and capacity

Size number	Range of wire sizes	For stripping insulation	For cutting wire
1	10, 12, 14, 16, 18 AWG and AN	Solid and stranded	10, 12, 14, 16, 18 solid and stranded
2	16, 18, 20, 22, 24, 26 AWG and AN	Solid and stranded	16, 18, 20, 22, 24, 26 solid and stranded

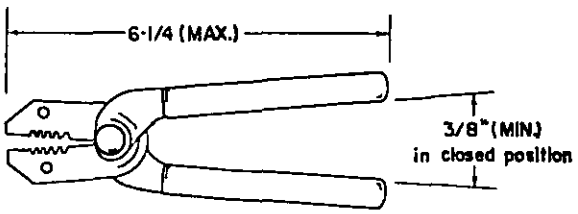


FIGURE 5.—Type II, class 3, flat jaws and handles

3.8 **Workmanship.** The workmanship shall be in accordance with good commercial standards. Strippers shall be free from sharp corners and edges (except cutting blades) and all imperfections which may adversely affect their durability and serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Sampling for quality conformance inspection.** Sampling for quality conformance inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.2.1 *Inspection of materials and components.* In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2.2 *Intermediate testing.* Testing for hardness shall be accomplished to determine compliance with paragraph 4.4.1. A lot shall consist of cutting blades heat treated as a lot or batch under the same process or control. Tests may be performed at an appropriate intermediate station, after heat treating and prior to finish and assembly. The inspection level shall be L4, with an acceptable quality level of 1.5 defects per hundred units.

4.2.3 *Inspection of the end item.* Inspection of the strippers shall be performed as specified in the following paragraphs. A lot shall consist of one type, class, style and size of strippers. The sample unit shall be one completely fabricated and assembled stripper.

4.2.3.1 *Visual examination.* Each sample unit shall be visually examined for defects set forth in table VI. The inspection level shall be level II with an acceptable quality level of 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

TABLE VI.—Classification of Defects

Examination	Defects
Finish	Surfaces not free from sharp corners and edges (other than cutting edge). Indication of rust. Finish not uniform. Machine marks. Not protected against corrosion or finish not as required. Scale, burrs and pits.
Material	Not as specified.
Design	Not type, class or style, as indicated.
Construction and workmanship	Component missing or improperly assembled. Cutting blades damaged, nicked, not sharp, not smoothly ground. Blades not adequately supported to assure alignment. Blades not readily replaceable. Excessive looseness or tightness of joints or rivets. Springs broken, cracked or means for removing and replacement not provided. Handles not capable of locking in any position within specified range, not secured to frame so as to prevent excessive looseness or play under hard usage (type I only). Cable rest not an integral part of frame or not securely attached (type I only). Means not provided for indexing blade for longitudinal or circumferential cuts or to prevent accidental disassembly (type I only). Insufficient number of grooves (type II only). Handle not secured so as to prevent looseness after hard usage (type II only). Stop return device damaged or inoperable (type II only). Handles not knurled (when specified). Handles not insulated (type II, class 3 only).
Marking	Incomplete, illegible, missing, incorrect, not affixed in the prescribed manner.

4.2.3.2 *Dimensional and weight examination.* Examination of the end item shall be made to determine compliance with the dimensions and weight requirements specified in the applicable paragraphs and tables. Any departure therefrom shall constitute a defect. The inspection level shall be L6 with an acceptable quality level of 6.5 defects per hundred units.

4.3 Testing of the strippers. Testing shall be performed on each sample unit in accordance with paragraphs 4.4.2 thru 4.4.2.4 as applicable. The inspection level and acceptable quality level shall be as follows expressed in defects per hundred units.

Component	Characteristic	Specification Reference	Level	AQL
Stripper	Stripping test	4.4.2.1 and 4.4.2.2	L 5	1.5
Stripper	Flamability test	4.4.2.3	L 2	(see note[1])
Stripper	Handle load test	4.4.2.4	L 5	1.5
Stripper	Dielectric test (Type II, Class 3 only)	4.4.2.5	L 2	1.0 (see note[2])

Note [1] The sample unit shall be not less than 2 or more than 4 for this test.

Note [2] The sample unit for this test shall be 2 strippers.

4.4 Test procedures.

4.4.1 *Hardness test.* Each of the sample strippers selected in accordance with 4.2 shall be tested to determine compliance with the requirements specified in 3.6.4, 3.7.1.2, 3.7.2.1.3, 3.7.2.2.3, and 3.7.3.1. Hardness readings shall be made on each blade as close to the cutting edge as practicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

4.4.2 *Performance test at place of manufacture.*

4.4.2.1 *Stripping test for all strippers except type II, class 2, styles B and C.* Samples of strippers selected in accordance with 4.2 shall be tested by stripping wire or cable of a size or sizes within the capacity of the tool. Wires and cables, having the different types of insulation and at least a diameter or gage equal to the smallest, medium and largest of range for which the stripper was designed shall be used and not less than three cuts shall be made to determine the suitability of the strippers for the purpose intended. The test shall be accomplished with ease of operation. When wire is stripped the conductors shall not be nicked, bent, or mushroomed. Upon completion of the test, there shall be no evidence of nicking, chipping or dulling of the blade; loosening of handles; failure of rollers to rotate freely; scoring or loosening of pins and rivets; or any permanent deformation resulting from test.

4.4.2.2 *Stripping test for type II, class 2, styles B and C strippers.* Samples of type II, class 2, styles B and C strippers selected in accordance with 4.2 shall be tested with the short stop latch disengaged by stripping "Teflon" insulated wire as specified in MIL-W-16878, type E or EE. This stripping test shall be conducted by stripping a minimum of 3/4 inch of "Teflon" insulation from at least 3 ends of wires for each size groove within the capacity of the stripper being tested. This test shall then be repeated with the short stop latch engaged. The stroke of the stripper (with the short stop latch engaged) shall be approximately 1/4 inch, allowing the stripper to partially strip the wire and leaving the "Teflon" insulation extending over, and protecting the end of the wire. These tests shall be accomplished with ease of tool operation. Upon completion of these tests, there shall be no evidence of nicking, chipping or dulling of the blade, loosening of handles, scoring or loosening of pins and rivets, or any permanent deformation resulting from these tests. The conductors of the stripped wires shall not be nicked, bent or mushroomed and the insulation shall be clearly and neatly cut with no evidence of permanent damage.

4.4.2.3 *Flammability test for insulated covering on handles of type II, class 3 strippers.* One handle of the stripper under test shall be clamped in a support with the other handle extended outward in a horizontal position. Under the handle, there shall be clamped a piece of 10-mesh Bunsen burner gauze, about 5 inches square, in a horizontal position, 1/4 inch below the bottom of the handle, and with about 1/2 inch of handle extending beyond the edge of the gauze. A Bunsen burner with an efficient flame 1/2 to 3/4 inch in height, shall be adjusted so that the flame tip will just contact the specimen when placed under the free end of the handle. At the end of 30 seconds, the flame shall be removed and the sample allowed to burn. The rate of travel of the flame shall be determined from the time required for the flame to travel the length of the plastic after the removal of the Bunsen burner. In case the plastic does not continue to burn after the first ignition, the burner shall be replaced under the free end for a period of 30 seconds immediately following the extinction of the flame. If the plastic does not continue to burn until the flame has reached the other end of the plastic after the second ignition, the sample shall be considered self-extinguishing; if the sample continues to burn, the burning rate shall not exceed 3.5 inches per minute.

4.4.2.4 *Handle-load test.* Type II, class 3 strippers under test shall be supported in a manner suitable for applying a load of 250 inch-pounds. The load shall be applied approximately one inch from the extreme end of the handles. The actual load applied to the handles shall be calculated by dividing the 250 inch-pounds by the distance between the center of the rivet and the line of action of the load. If the permanent set is in excess of 1/16 inch, or if the rivet or any other part shows signs of weakness or damage, the sample shall be considered to have failed in the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

4.4.2.5 *Dielectric strength test.* Each sample unit of the type II, class 3 stripper shall be subjected to the dielectric strength test. One of the sample unit strippers shall be tested after immersion in transformer oil for a period of 5 hours and one stripper shall be tested after immersion in water for a period of 5 hours. After the surface has been wiped dry the handle of each shall be wrapped in metal foil to a distance of 7/8 plus or minus 1/16 inch, from the nearest exposed metal part of the stripper and two voltage leads shall be connected to the stripper; one to the jaw and one to the metal foil. The sample shall then be subjected to a voltage of not less than 2200 volts, 60 cycles alternating current for a period of 1 minute and the insulation shall withstand this voltage.

4.4.3 *Failure of test samples.* Any stripper in the sample which fails any applicable test specified in section 4 of this specification shall cause rejection of the lot represented by the sample. Possible test failures are defined as follows:

(*a*) Hardness test:

Hardness of cutting blade not within the required value.

(*b*) Performance test:

Failure to strip insulation from cables and wires within the size range; conductors nicked or chipped or parts of the stripper loosened.

4.5 Inspection of preparation for delivery. Unless otherwise specified, inspection to determine compliance with preparation for delivery requirements shall be accomplished in accordance with MIL-H-15424.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions of the various levels of packaging and packing protection for supplies and equipment.)

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 *Level A.* Preservation and packaging shall be in accordance with level A of MIL-H-15424.

5.1.2 *Level C.* Cleaning, preservation, and packaging shall be in accordance with the supplier's commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Strippers, packaged as specified (see 5.1), shall be packed in accordance with level A requirements of MIL-H-15424.

5.2.2 *Level B.* Strippers, packaged as specified (see 5.1), shall be packed in accordance with level B requirements of MIL-H-15424.

5.2.3 *Level C.* Strippers, packaged as specified (see 6.2), shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Military agencies.* In addition to any special marking required by the contract or order or herein, interior and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 *Civil agencies.* In addition to any special marking required by the contract or order, interior and exterior shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

6.1.1 *Type I strippers.* Type 1 strippers are intended for the stripping of insulation from armored and unarmored cable.

6.1.2 *Type II strippers.* Type II strippers are intended for use on standard wire sizes, high-tension and low-tension ignition wire as well as other wires used on automotive and aircraft equipment, etc.

6.1.2.1 *Type II, class 2, styles B and C strippers.* Type II, class 2, styles B and C strippers are intended for use in stripping "Teflon" insulation from wires without damage to either the insulation or the wires.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Type, class, style, and size of stripper required. (1.2 and tables I through V).
(*c*) Finish, if other than the standard finish of the manufacturer is required. (3.3.)
(*d*) When additional blades are required for type II, classes 1 or 2, specify "blades only", and specify the size or sizes and quantity desired. (3.7.1.2, 3.7.2.1.3, 3.7.2.2.3, and 3.7.2.3.2).
(*e*) Applicable levels of preservation, packaging, and packing.

6.2.1 When repair parts for strippers are required, the following should be specified:

(*a*) The manufacturer's name or trademark of stripper for which required.
(*b*) The proper name of the part.
(*c*) Quantity of each item to be procured.
(*d*) Any other data applicable to the stripper which will assist in securing the proper repair parts.

6.3 **Transportation description.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tools, not otherwise indexed by name. Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, not otherwise indexed. Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—GL
Navy—Sh
Air Force—MOA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.