GGG-W-653b
March 12, 1964

SUPERSEDING
Fed. Spec. GGG-W-653a,
February 16, 1954

FEDERAL SPECIFICATION

WRENCH, RATCHET, REVERSIBLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers reversible ratchet wrenches used on both steel- and wood-construction work for tightening or loosening nuts and bolts. They are also used for operating valve stems and some machine tools.

1.1.1 The ratchet wrenches covered by this specification are different in construction and use than the reversible ratchet handles (sometimes called wrenches) covered by GGG-W-641. The ratchet wrenches incorporate in their handle head a nut and bolt-head wrench socket having gear-type teeth, and the interchanging of other sizes of sockets is accomplished by removing a cover plate, snap ring, or other retaining device. (The ratchet handles covered by GGG-W-641 do not incorporate a nut and bolt-head wrench socket but have a unit with gear type teeth or clutch mechanism enclosed in the handle head with an exposed part of the unit terminating as a square-drive tang for engaging the female square drive in nut and bolt-head wrench sockets.)

1.1.2 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes, and styles.* Reversible ratchet wrenches shall be of the following types, classes, and styles, as specified (see 6.1):

Type I.—Thin head.
  Class 1.—Reverse mechanism in head.
    Style A.—Square socket.
    Style B.—Hex socket.
  Class 2.—Reverse mechanism in handle.
    Style A.—Square socket.
    Style B.—Hex socket.
Type II.—Thick head.
  Class 2.—Reverse mechanism in handle.
    Style A.—Square socket.
    Style B.—Hex socket.
Type III.—Protruding head, single size.
  Class 1.—Reverse mechanism in head.
    Style A.—Square socket.
    Style B.—Hex socket.
  Class 2.—Reverse mechanism in handle.
    Style A.—Square sockets.
    Style B.—Hex sockets.
Type IV.—Protruding head, multi-size.
  Class 1.—Reverse mechanism in head.
    Style A.—Square sockets.
    Style B.—Hex sockets.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

bids or request for proposal, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools, Packaging of.

Military Standard:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive, and are not intended to preclude the purchase of wrenches otherwise conforming to this specification.

3.2 Material. Handles and socket shall be of high-quality steel or malleable iron and the heat treatment employed shall be such as to produce wrenches conforming to the requirements as hereinafter specified.

3.3 Components. Wrenches shall consist essentially of a handle, ratchet mechanism, and a socket.

3.3.1 *Handles.* Handles shall afford a comfortable handgrip and have a head provided on one end for receiving the socket. Suitable metallic means shall be incorporated in the head or socket to keep the socket securely in place, and also to allow the socket to rotate without binding. Nonmetallic retaining devices will not be acceptable. All surfaces which bear or mate with the socket shall have a machine finish.

3.3.2 *Ratchet-mechanisms.* The ratchet shall be enclosed in the handle head and all cover plates or retaining devices shall be secured in such manner as will minimize loosening during hard usage. Ratchets shall be reversible by manual movement of a shifting lever, knurled button, or equally suitable means which permits ratcheting operation of the socket in either direction of rotation. The shifting lever, knurled button, or other device shall be of steel of sufficient strength to assure long life under hard usage, and shall be located in the handle head on class 1 wrenches and at the handgrip end of handle on class 2 wrenches (see 1.2).

3.3.3 *Sockets.* Sockets shall be furnished in style A, square, or style B, hexagon, as specified (see 6.1). All bearing surfaces shall be machine finished and corners, at nut-engaging surfaces, shall be well defined. All sockets, except type III, class 1 and type IV, class 1, shall have a minimum of 16 teeth in order to assure ratcheting with a handle swing of 22-1/2 degrees or less. Type III, class 1 sockets for the 12-inch nominal handle length shall have a minimum of 11 teeth to assure a handle swing of 33 degrees or less. Type IV, class 1 sockets shall have a minimum of 12 teeth in order to assure

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

ratcheting with a handle swing of 30 degrees or less. The sockets shall fit standard nuts and boltheads for which they are designed.

3.4 Weight and dimensions. The weight of wrenches (handle and socket) specified in tables I, II, III, IV, V, and VI shall have a tolerance of plus or minus 15 percent. The nominal length of wrench is measured from the center of the socket opening to end of handle and shall have a tolerance of plus or minus 1 inch, except for type IV which shall have a tolerance of plus or minus 2 inches.

3.5 Identification marking. Handles and sockets shall be marked in a legible and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined. In addition, the sockets shall be permanently marked with the nominal distance across the flats and shall be visible after being assembled in the handle heads.

3.6 Finish. Wrenches shall have any one of the following finishes unless a particular finish is specified in the contract or order (see 6.1):

(a) Natural finish free from excess oxide scale, oil treated.

(b) Chemically-produced oxide coating, oil treated.

(c) Chemically-produced phosphate coating, oil treated.

(d) Lacquered or enameled.

3.7 Type I, thin head.

3.7.1 *Class 1, reverse mechanism in head.* Ratchet wrenches shall conform to table I and shall be similar to figure 1.




FIGURE 1.—Type I, class 1, thin head, reverse mechanism in head.

3.7.2 *Class 2, reverse mechanism in handle.* Ratchet wrenches shall conform to table II and shall be similar to figure 2.

TABLE I.—*Type I. class 1, styles A and B dimensions and requirements*

Wrenches				Sockets		Torque load (minimum)
Nominal length	Nominal weight	Maximum thickness of head	Maximum diameter of head	Nominal distance across flats		
				Style A square	Style B hexagon	
Inches 24	*Pounds* 12	*Inches* 1½	*Inches* 4½	*Inches* 1⅛; 1¼; 1⅜; 1½; 1⅝; 1¾; 1 15/16; 1⅞; 2	*Inches* 1⅛; 1 1/16; 1 1/16; 1¼; 1⅜; 1 15/16; 1⅞; 2; 2⅛; 2 1/16; 2⅜	*Inch-pounds* 20,000
24	21	1½	6½	2; 2⅛; 2⅜; 2½	2⅜; 2⅜; 2 1/16; 2⅛; 2 15/16; 3; 3⅛	30,000
36	15	1½	4½	1⅛; 1¼; 1⅜; 1½; 1⅝; 1¾; 1 15/16; 1⅞; 2	1⅛; 1 1/16; 1 1/16; 1¼; 1⅜; 1 15/16; 1⅞; 2; 2⅛; 2 1/16; 2⅜	20,000
36	22	1½	6½	2; 2⅛; 2⅜; 2½	2⅜; 2⅜; 2 1/16; 2⅛; 2 15/16; 3; 3⅛	30,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

TABLE II.—*Type I, class 2, dimensions and requirements*

Wrenches				Sockets		Torque load (minimum)
Nominal length	Nominal weight	Maximum thickness of head	Maximum diameter of head	Nominal distance across flats		
				Style A square	Style B hexagon	
Inches	*Pounds*	*Inches*	*Inches*	*Inches*	*Inches*	*Inch-pounds*
10	2¼	1 1/16	2 1/16	⅜		1,800
				½; ⅝	9/32; ⅝; 1 1/16; ¾; 25/32	3,000
12	3½	1⅛	2⅜	¾	29/32; 29/32	4,000
15	5¼	1 5/16	3⅛	½; 1 1/16; ¾; 1 5/16; ⅞; 1 5/16; 29/32; 1; 1 1/16; 1⅛	¾; ⅞; 1 5/16; 29/32; 1; 1 1/16; 1⅛; 1¼	5,000
18	9½	1 7/16	3 13/16	¾; 1		7,000
24	11¾	1 7/16	3 13/16	¾; ⅞; 1; 1 1/16; 1⅛; 1 5/16; 1⅜; 1 7/16; 1⅝.	⅞; 1; 1 1/16; 1⅛; 1⅜; 1 7/16; 1⅝; 1⅞; 1 13/16.	10,000
36	21½	1½	4 1/16	1⅛; 1¼; 1⅜; 1½; 1⅝; 1⅞; 1 13/16; 1⅞; 2.	1⅛; 1 7/16; 1½; 1⅝; 1 11/16; 1 13/16; 1⅞; 2; 2⅛; 2¼; 2 5/16; 2⅜.	20,000




FIGURE 2.—Type I, class 2, thin bead, reverse mechanism in handle.



FIGURE 3.—Type II, class 2, thick head, reverse mechanism in handle.

3.8 Type II, thick head.

3.8.1 *Class 2, reverse mechanism in handle.* Ratchet wrenches shall conform to table III and shall be similar to figure 3.

3.9 Type III, protruding head, single size.

3.9.1 *Class 1, reverse mechanism in head.*

TABLE III.—*Type II, class 2, dimensions and requirements*

Wrenches				Sockets		Torque load (minimum)
Nominal length	Nominal weight	Maximum thickness of head	Maximum diameter of head	Nominal distance across flats		
				Style A square	Style B hexagon	
Inches	*Pounds*	*Inches*	*Inches*	*Inches*	*Inches*	*Inch-pounds*
10	2¼	1⅝	2	½; ⅝; ¾	½; ⅝; ¾; ⅞	3,000
14	4	2 1/16	2½	¾; ⅞; 1; 1⅛	¾; ⅞; 1; 1⅛	5,000
24	8½	2½	3	⅞; 1; 1⅛; 1¼	⅞; 1; 1⅛; 1¼	10,000
36	18½	3	4	1⅛; 1⅜; 1½; 1⅝; 1¾; 1⅞	1¼; 1⅜; 1½; 1⅝; 1¾; 1⅞	20,000

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:41Z
Check the source to verify that this is the current version before use.

TABLE IV.—*Type III, class 1, styles A and B dimensions and requirements*

Wrenches		Sockets		Torque load (minimum)
Nominal length	Nominal weight	Nominal distance across flats		
		Style A square	Style B hexagon	
Inches	*Pounds*	*Inches*	*Inches*	*Inch-pounds*
12	3	15/32; 1/2; 17/32; 9/16; 5/8; 21/32; 1; 1 1/16; 1 1/8; 1 1/4.	15/32; 1/2; 17/32; 9/16; 5/8; 21/32; 1; 1 1/16; 1 1/8; 1 1/4.	3,000
16	5	5/8; 11/16; 3/4; 13/16; 1; 1 1/16; 1 1/8; 1 1/4; 1 5/16; 1 3/8; 1 7/16; 1 1/2.	11/16; 3/4; 13/16; 1; 1 1/16; 1 1/8; 1 1/4; 1 5/16; 1 3/8; 1 7/16; 1 1/2.	5,000
24	10	1; 1 1/16; 1 1/8; 1 1/4; 1 5/16; 1 3/8; 1 7/16; 1 1/2; 1 9/16; 1 5/8; 2.	1; 1 1/16; 1 1/8; 1 1/4; 1 5/16; 1 3/8; 1 7/16; 1 1/2; 1 9/16; 1 5/8; 2.	25,000
36	15	1 5/16; 1 3/8; 1 7/16; 1 1/2; 1 9/16; 1 5/8; 1 11/16; 1 3/4; 2; 2 1/16; 2 1/8.	1 5/16; 1 3/8; 1 7/16; 1 1/2; 1 9/16; 1 5/8; 1 11/16; 1 3/4; 2; 2 1/16; 2 1/8.	30,000
36	24	2; 2 1/16; 2 1/8; 2 1/4; 2 3/8; 2 5/16; 2 1/2; 2 3/4; 2 13/16; 3; 3 1/8.	2; 2 1/16; 2 1/8; 2 1/4; 2 5/16; 2 1/2; 2 3/4; 2 13/16; 3; 3 1/8.	60,000

Ratchet wrenches shall conform to table IV and shall be similar to figure 4.




FIGURE 4.—Type III, class 1, protruding head, single size, reverse mechanism in head.

3.9.2 *Class 2, reverse mechanism in handle.* Ratchet wrenches shall conform to table V and shall be similar to figure 5.

3.10 Type IV, protruding head, multi-size.

3.10.1 *Class 1, reverse mechanism in head.* Ratchet wrenches shall conform to table VI and shall be similar to figure 6.

TABLE V.—*Type III, class 2, dimensions and requirements*

Wrenches				Sockets		Torque load (minimum)
Nominal length	Nominal weight	Maximum thickness of head	Maximum diameter of head	Nominal distance across flats		
				Style A square	Style B hexagon	
Inches	*Pounds*	*Inches*	*Inches*	*Inches*	*Inches*	*Inch-pounds*
10	2 1/2	1 5/8	2	1/2; 9/16; 19/32; 5/8; 11/16; 3/4; 25/32; 13/16; 7/8; 15/16; 29/32; 1; 1 1/16.	1/2; 9/16; 19/32; 5/8; 11/16; 3/4; 25/32; 13/16; 7/8; 15/16; 29/32; 1; 1 1/16.	3,000
14	4	2 1/16	2 1/2	3/4; 7/8; 29/32; 1; 1 1/16; 1 1/8; 1 1/4; 1 5/16; 1 3/8; 1 7/16; 1 1/2; 1 5/8.	3/4; 7/8; 29/32; 1; 1 1/16; 1 1/8; 1 1/4; 1 5/16; 1 3/8; 1 7/16; 1 1/2; 1 5/8.	5,000
24	8 1/2	2 1/2	3	1 1/8; 1 1/4; 1 5/16; 1 3/8; 1 7/16; 1 1/2; 1 11/16; 1 13/16; 1 7/8; 2.	1 1/8; 1 1/4; 1 5/16; 1 3/8; 1 7/16; 1 1/2; 1 11/16; 1 13/16; 1 7/8; 2.	10,000
36	18 1/2	3	4	1 13/16; 1 15/16; 1 7/8; 2; 2 1/16; 2 1/8; 2 1/4; 2 3/8; 2 5/16; 2 1/2; 2 3/4; 2 13/16; 3; 3 1/8.	1 13/16; 1 15/16; 1 7/8; 2; 2 1/16; 2 1/8; 2 1/4; 2 3/8; 2 5/16; 2 1/2; 2 3/4; 2 13/16; 3; 3 1/8.	20,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

TABLE VI.—*Type IV, class 1, dimensions and requirements*

Wrenches		Sockets		"U" dimensions ± 1/8	Torque load (min.)
Nominal length	Nominal weight	Nominal distance across flats			
		Style A square	Style B hexagon		
Inches	*Pounds*	*Inches*	*Inches*	*Inches*	*Inch-pounds*
14	8	1/2 and 11/16		5/16	3,000
			1/2 and 11/16	7/8	
		7/8 and 1-1/16	7/8 and 1-1/16	1	
			1-1/16 and 1-1/4	1-1/16	
			1-1/16 and 1-1/16	1-1/16	3,000
22	7-1/2	1-1/4 and 1-7/16	1-1/4 and 1-7/16	1	6,000
			1-7/16 and 1-5/8	1-3/16	
			1-5/8 and 1-13/16	1-3/8	
			1-1/8 and 1-7/8	1-3/4	
26	10	1-5/8 and 1-13/16		1-1/4	9,000
		1-5/8 and 2		1-1/2	
			1-13/16 and 2	1-7/16	
			2 and 2-3/16	1-5/8	
			2 and 2-3/8	1-3/4	

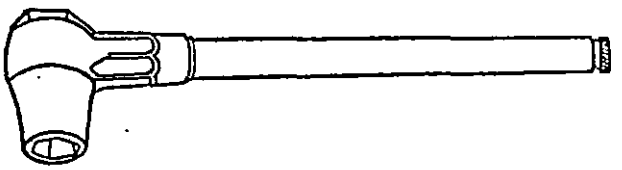


FIGURE 5.—Type III, class 2, protruding head, *single size, reverse mechanism in* handle.



FIGURE 6.—Type IV, class 1, protruding head, multi-size, with reverse mechanism in head.

3.11 Repair parts. The successful bidders supplying wrenches shall make available and furnish repair parts when requested (see 6.1). All parts having the same manufacturer's part number shall be constructed to definite standards, tolerances, and clearances, in order that such parts may be completely interchangeable, replaced or adjusted without requiring modification. Repair parts shall be of a quality equal to those originally used in the wrenches.

3.12 Workmanship. Wrenches shall be free from fins, burrs, sharp edges, rough surfaces, and imperfections of any nature which may adversely affect their durability and serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for quality conformance inspection. Sampling for quality conformance inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:41Z
Check the source to verify that this is the current version before use.

4.3 Inspection of the end item.

4.3.1 *Visual examination.* Examination of the wrenches shall be in accordance with the classification of defects specified in table VII. The lot size shall be expressed in units of wrenches for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one completely fabricated wrench. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and a total of 6.5 expressed in defects per hundred units.

TABLE VII.—*Classification of defects*

Examine	Defect	Major	Minor
Design	Type, class, and style not as specified	X	
	Any characteristic not in accordance with the specified requirements	X	
Finish	Rust or burrs		X
	Not as specified		X
	Coating not adherent or smooth or not continuous		X
	Coated areas not totally covered		X
Construction	Incomplete or improperly assembled	X	
	Ratchet mechanism does not function smoothly	X	
	Less than 16 teeth in ratchet (except type III, class 1 and type IV, class 1)	X	
	Less than 12 teeth in ratchet (type IV, class 1 only)	X	
	Less than 11 teeth in ratchet (type III, class 1 only)	X	
Marking	Missing, not as specified, incomplete or illegible		X

4.3.2 *Dimensional examination.* Inspection shall be made of the wrenches for compliance with dimensions and weights as specified in applicable paragraphs and tables. Any deviation therefrom shall constitute a defect. The inspection level shall be S-2 with an AQL of 1.5 defects per hundred units.

4.3.3 *Testing of wrenches.* Testing shall be performed on each sample wrench from each lot as indicated in 4.4. Any deviation therefrom shall constitute a defect. The inspection level shall be S-2 with an AQL of 1.5 defects per hundred units. Each of the sample wrenches, handles, and sockets selected in accordance with 4.3.3 shall be tested to determine if they withstand the applicable torque load specified in tables I through VI. Handles shall be tested in conjunction with a suitable socket of the largest size listed in the applicable table for use with the handle being tested. Sockets shall be tested in conjunction with the handle for which required. Hexagon mandrels shall be used for hexagon sockets and square mandrels for square sockets. The mandrels shall be suitably hardened and the size of hexagon or square end shall not exceed the nominal distance across flats (see tables I through VI) of the applicable socket, by more than 0.001 of an inch. The torque loads shall be applied either with a torque producing machine, suitable lever with dead weights, or a testing machine. The load shall be applied for 1 minute and then removed. Care shall be exercised to maintain accuracy in applying the load and in measuring the effective lever arm through which the load acts. The effective lever arm, when the load is vertical and lever is employed, is the shortest distance in inches, between two vertical lines passing, respectively, through the point of load application and the center of the mandrel fitting the wrench opening. The specified test load shall be the product of the effective lever arm, in inches, and the applied load, in pounds. After application of the torque load, handles and sockets shall be examined for any indications of permanent set, cracks or flaws, or damage to the rachet mechanism, ratchet reverse

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

control, or pawl engaging surfaces. Any sample wrench, handle, or socket failing to pass this test shall be rejected, and if the number of defectives exceed the acceptance number for that sample, the lot represented by the sample, shall be rejected.

4. Examination of preparation for delivery. Inspection to determine compliance with preparation for delivery shall be made in accordance with MIL-H-15424.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 Cleaning, preservation, and packaging.

5.1.1 *Level A.* Wrenches shall be preserved and packaged in accordance with level A of MIL-H-15424.

5.1.2 *Level C.* Wrenches shall be preserved and packaged in such a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from supply source to the first receiving activity for immediate use. This may conform to the supplier's commercial practice when such meets the requirements of this level.

5.2 Packing.

5.2.1 *Level A.* Wrenches, packaged as specified (see 6.1), shall be packed in accordance with level A of MIL-H-15424.

5.2.2 *Level B.* Wrenches, packaged as specified (see 6.1), shall be packed in accordance with level B of MIL-H-15424.

5.2.3 *Level C.* Wrenches, packaged as specified (see 6.1), shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Container shall be in accordance with rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Military agencies.* In addition to any special marking required by the contract or order or herein, interior and exterior shipping containers shall be marked in accordance with MIL-H-15424.

5.3.2 *Civil agencies.* In addition to any special marking required by the contract or order, marking shall be in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) For wrenches (socket and handle), specify the type, class, length, style of socket and nominal distance across flats; also, weight for types I and III, class 1 wrenches. (See 1.2 and applicable tables.)

(*c*) For sockets only, style and nominal distance across flats, and for types I and III, class 1 the type, class, length, and weight of wrench for which the sockets are intended (see 1.2 and applicable table); also manufacturer's name and part number of the wrench for which the sockets are intended.

(*d*) For handles only, type, class, length, and weight for types I and III, class 1 wrenches (see 1.2 and applicable table); also the manufacturer's name and part number of the wrench for which the handles are intended.

(*e*) Finish, if different (see 3.6).

(*f*) Applicable levels of packaging and packing required (see 5.1 and 5.2).

(*g*) Special marking, if required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:41Z
Check the source to verify that this is the current version before use.

6.2 Items procured under this specification for Military use are to be limited to the variety shown on the applicable Military standards. Personnel of the Military Departments are requested to refer to these documents for guidance.

6.3 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Wrenches, not otherwise indexed by name, without attachments.
Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, other than power.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—GL

Navy—Ships

Air Force—MOA

Preparing activity:

Navy—Ships

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:41Z
Check the source to verify that this is the currentversion before use.