MIL-C-38979A(USAF)
8 June 1978
SUPERSEDING
MIL-C-38979
2 December 1968 and
AMENDMENT 1
5 February 1970

MILITARY SPECIFICATION

CARTRIDGE, BOMB EJECTION CCU-1/B

This specification is approved for use by HQ AFLC CASO/LODS, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of cartridge designated as the Cartridge, Bomb Ejection CCU-1/B hereafter referred to as the cartridge. The cartridge is designed to provide a source of gas pressure for forced ejection of weapons from the Aircraft Bomb Ejector Racks MAU-12A/A, MAU 12B/A, BRU-2/A and BRU-4/A.

2. APPLICABLE DOCUMENTS

2.1 Issues of document. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-T-7743	Testing, Store Suspension and Release Equipment, General Specification For
MIL-D-81303	Design and Evaluation of Cartridges for Stores Suspension Equipment

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, by using the self-addressed Standardization Document Improvement Proposal (Form DD1426) appearing at the end of this document or by letter.

FSC 1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

MIL-STD-202	Test Methods for Electronics and Electrical Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-831	Test Reports, Preparation of
MIL-STD-1167	Ammunition Data Card
MIL-STD-1168	Lot Numbering of Ammunition

DRAWINGS

Air Force

67F14000	Cartridge, Bomb Ejection CCU-1/B

OTHER PUBLICATIONS

CODE OF FEDERAL REGULATIONS

49 CPR 100-199	Department of Transportation Rules and Regulations for Transportation of Explosives and Other Dangerous Articles

(The Department of Transportation Rules are a part of the Code of Federal Regulations available from the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402. Orders for the above publications should cite "49 CPR 100-199 [latest revision]").

3. REQUIREMENTS

3.1 Preproduction. This specification makes provision for preproduction testing.

3.2 Design and construction. The cartridge shall be constructed in conformance to Air Force drawing 67F14000 and subsidiary drawings.

3.3 Function. The function of the cartridge is to provide a source of gas pressure for forced ejection of weapons from a Bomb Ejector Rack MAU-12b/a or similar types of ejector racks.

3.3.1 Ballistics. Two cartridges, installed in a MAU-12 Bomb Ejector Rack and actuated by the "all fire" current shall produce performance as noted below.

	Store A	Store B
-54°C ± 15° (-65 ± 5°F)	*	*
+21°C ± 15° (+70 ± 5°F)	4.26 $\pm^{.30}_{.61}$ mps (14 ± ½ fps) ejection velocity and 6804kg (15,000 lbs) max reaction force	6804kg (15,000) lbs max reaction force

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

+163°C ± 15° (+325 ± 5°F)	4.26 ± .30 .61 (14 ± 1 ½ fps) ejection velocity	*

*Performance values at these temperatures are to be recorded for information only.

3.3.2 Store A. Store "A" shall have a weight of 226.80 ± 4.54kg (500 ± 10 lbs) diameter 37.46 ± .063cm (14.75 ± 0.25 inches), and the center of gravity shall be 11.18 ± .063cm (4.40 ± 0.25 inches) forward of the aft lug. Fourteen-inch lug spacing shall be used.

3.3.3 Store B. Store "B" shall have a weight of 975.24 ± 11.35kg (2150 ± 25 lbs), diameter of 45.72 ± .063cm (18 ± 0.25 inches), and the center of gravity shall be midway between the thirty-inch spaced lugs.

3.3.4 Ejection velocities. Ejection velocities shall be measured at the end of the ejector rack piston stroke. Orifice sizes to be used are 2.36mm (0.093 inches) overboard forward and 2.36mm (0.093 inches) aft for Store A and 2.79mm (0.110 inches) forward and 2.36mm (0.093 inches) aft for Store B.

3.4 Performance.

3.4.1 All-fire sensitivity. The cartridge shall fire within 25 milliseconds, under all environmental conditions, when subjected to a direct current of 5 amperes at 24-28 volts d.c.

3.4.2 No fire sensitivity. The cartridge shall be capable of withstanding a minimum direct current of 1 ampere or 1 watt, whichever is greater, for a duration of five minutes, minimum, without firing under any environmental conditions.

3.4.3 Sympathetic ignition. The cartridge, when installed in the MAU-12 Rack shall fire sympathetically as a result of the electrically initiated firing, by the "all fire current," of a second cartridge.

3.4.4 Function time. Two cartridges when installed in a MAU-12B/A rack which is loaded with Store A shall exhibit a function time less than 100 ms. 3.3.4 shall apply.

3.5 Electrical resistance. The electrical resistance of the iginition element shall be a minimum of 20 ohms after firing.

3.6 Environmental requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

3.6.1 Static discharge. The cartridge shall not fire when subjected to an electrostatic discharge of 150,000 ergs from a 500 picofarad capacitor.

3.6.2 Stray voltage. The cartridge shall be capable of proper performance after subjection to 2000 pulses of direct current. Each pulse shall be 105 ± 5 milliamperes. Duration of pulse shall be 300 milliseconds and pulse recurrent rate shall be 2.0 pulses per second.

3.6.3 Vibration. The cartridge shall be capable of satisfactory operation during and after vibration, as specified in vibration tests of this specification.

3.6.4 Air Tightness. The cartridge shall not exhibit a leak rate of greater than 1 x 10-4 cc/sec when subjected to a dry leak test at a pressure differential of .98 kg/cm^2 (14 psi).

3.6.5 Temperature. The cartridge shall be capable of proper performance during and after prolonged exposure at temperatures from -54°C to +163°C (-65°F to + 325°F).

3.6.6 Temperature shock. The cartridge shall be capable of proper performance after being subjected to the temperature shock testing requirements of this specification.

3.6.7 Acceleration. The cartridge shall be capable of proper performance after sustaining a 50g acceleration for at least one minute in each of its three mutually perpendicular axes.

3.6.8 Acoustic noise. The cartridge shall be capable of proper performance when subjected to acoustical noise levels of 160 decibels.

3.6.9. Impact shock. The cartridge shall be capable of proper operation after being subjected to an 2.44m (8-foot) drop onto a steel plate supported by concrete.

3.6.10 Temperature and humidity cycling. The cartridge shall be capable of proper performance after being subjected to the temperature and humidity cycling test.

3.6.11 Protective finish. The protective finish shall be in accordance with the applicable drawings and specifications.

3.7 Workmanship. The cartridge, including all parts and accessories, shall be fabricated in a manner that will ensure that the criteria of appearance, fit, and adherence to tolerances, as specified on the drawings, shall be observed. Particular attention shall be given to the markings required under "Identification of Product".

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

3.8 Reclaimed materials. Reclaimed materials shall be utilized to the maximum extent possible within the quality limits required by this document and to fulfill compliance with the Research Conservation/Recovery Act of 1976 (Public Law 94-580, dated 21 Oct 76)."

3.9 Identification of product. The cartridge shall be marked for identification in accordance with MIL-STD-130.

3.10 Lot numbering. Each separate production lot shall be assigned an ammunition lot number in accordance with MIL-STD-1168. This lot number shall be marked on each cartridge, as shown on the assembly drawing.

3.11 Storage compatibility group. The cartridge belongs to storage compatibility Group C.

3.12 Hazard class/division. The cartridge is a Class I.I, DOT Code C.

3.13 DOT explosive classification. CCU-1/B Cartridge shall be assigned DOT explosive classification in accordance with 49 CFR Parts 100-199.

3.14 Government loaned property. The following items of equipment are required by the contractor for the purpose of testing the cartridge.

Item Number	Part Number	Description of Item	Quantity
1	63J14360	Rack, Bomb Ejector, Aircraft MAU-12A/A	As Stated in Contract
2	64J13210-3	Rack, Bomb Ejector, Aircraft MAU-12B/A	As Stated in Contract
3	68J13090-7	Rack, Bomb Ejector, Aircraft BRU-4/A	As Stated in Contract

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of the cartridge shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

a. Preproduction Tests

b. Acceptance Tests

4.3 Preproduction testing.

4.3.1 Preproduction testing. The preproduction test samples shall be representative of production cartridges. All samples shall be tested in the applicable bomb ejector rack.

4.3.2 Preproduction test report. In the event that preproduction testing is performed at the contractor's plant, the contractor shall, after completion of the preproduction tests, prepare a preproduction test report according to MIL-STD-831.

4.3.3 Preproduction tests. Preproduction tests shall consist of all tests described in "4.5 Test Methods" as listed in Table I and Table II.

4.4 Acceptance tests. Acceptance tests shall consist of the following:

a. Individual tests

b. Sampling plans and tests

4.4.1 Individual tests. Each cartridge shall be subjected to the individual tests listed in Table I.

4.4.2 Sampling plan and tests.

4.4.2.1 Lot. Lot definition, size and formation shall be in accordance with the following:

a. Components produced by a homogeneous process

b. Propellant from no more than one lot

c. Ignition composition from not more than one lot

d. Ignition elements from not more than one lot

4.4.2.2 Sampling plan. The sample size shall be in accordance with MIL-STD-105, Inspection Level II and Table II-A. Sample tests will be as stated in Table I of this specification. A sampling test plan shall be submitted to the procuring activity for approval before production begins.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

4.4.3 Rejection and retest. When a sample cartridge fails to meet specified test, no cartridge on hand or later produced shall be accepted until the extent and cause of failure are determined. The cause of failure shall be corrected and subsequent cartridges shall demonstrate compliance by pressing the failed tests.

4.4.4 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and methods of correcting them.

4.5 Test conditions.

TABLE I

TEST	REQUIREMENT PARAGRAPH	TEST PARAGRAPH	PREPRO-DUCTION TEST	INDIVI-DUAL TEST	SAMP-LING TEST
Examination of Product	3.2	4.6.2	X	X	
Conformance to Drawings	3.2	4.6.3	X	X	
All Fire Sensitivity	3.4.1	4.6.5	X		X*
No Fire Sensitivity	3.4.2	4.6.6	X		X
Sympathetic Firing	3.4.3	4.6.7	X		
Electrical Resistance	3.5	4.6.8	X	X	
Static Discharge	3.6.1	4.7.1	X		
Stray Voltage	3.6.2	4.7.2	X		
Vibration	3.6.3	4.7.3	X		X
Airtightness	3.6.4	4.7.4	X		X
High Temperature	3.6.5	4.7.5	X		X*
Low Temperature	3.6.5	4.7.6	X		
Acceleration	3.6.7	4.7.8	X		
Acoustic Noise	3.6.8	4.7.9	X		
Temperature Shock	3.6.6	4.7.7	X		
Shock	3.6.9	4.7.10	X		
X-Ray		4.6.4	X		X
Ballistic Firing	3.3.1		X		X
Function Time	3.4.4		X		
Temperature Humidity Cycling	3.6.10	4.7.11	X		

*To be conducted in conjunction with ballistic firing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

TABLE II

PREPRODUCTION SCHEDULE AND TEST PLAN

| TEST TITLE | | |

TABLE II (CONT)

PERFORMANCE FIRINGS (CONT)

Cartirdge Firings -54°C (-65°F)	1-12	61-64	73-76	85-88	97-100	109-112	121-124	133-136	145-154	
Cartridge Firings +21°C (+70°F)	13-36	65-68	77-80	89-92	101-104	113-116	125-128	137-140	155-164	175-192
Cartridge Firings +163°C (+325°F)	37-60	69-72	81-84	93-96	105-108	117-120	129-132	141-144	165-174	
Smypathetic Ignition	9-12	33-36	57-60	153-154	163-164	173-174				
Post Firing Electrical Resistance	1-192									
Function Time	1-192***									

*Except those units not subjected to current during sympathetic ignition.
**Tests will be repeated following the environmental test phase.
***Shall not apply to sympathetic ignition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

4.5.1 Standard conditions. Test conditions shall be as specified in each specific test under "4.5 Test methods." If no conditions are stated, the following shall apply:

a. Temperature 21°C (70°F) ± 11°C (20°F).

b. Relative Humidity - 90 percent or less.

4.5.2 Test temperature. The cartridge shall be established at the specified temperature prior to conducting any tests. Temperature stabilization shall be as defined in MIL-STD-810.

4.5.3 Test measurements.

4.5.3.1 Instruments. All measurements shall be made with instruments whose accuracy has been verified. Calibration records shall be maintained.

4.5.3.2 Tolerances. The maximum allowable tolerance on test condition measurements shall be as follows:

a. Temperature - Plus or minus 2.8°C (5°F).

b. Relative Humidity - plus or minus 5 percent.

c. Vibration and Shock Amplitude - plus or minus 5 percent.

d. Vibration Frequency - plus or minus 2 percent.

e. Current - plus or minus 2 percent.

f. Resistance - plus or minus 2 percent.

g. Time Interval - plus or minus 2 percent.

h. Pressure - plus or minus 5 percent.

i. Reaction Force - plus or minus 5 percent.

j. Velocity - plus or minus 5 percent.

k. Sound Level - plus ot minus 2 percent.

4.5.4 Required measurements.

a. Resistance of unit prior to firing.

b. Firing current.

c. Firing time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

d. Pressure vs time.

e. Reaction force vs time.

f. Pitch rate vs time.

g. Velocity

h. For preproduction testing, the cartridge number shall be recorded.

i. Other measurements shall be taken as specified in preproduction schedule and test plan.

4.6 Test methods.

4.6.1 Classification of tests. Inspection and testing of the cartridge shall be as shown in Table I.

4.6.2 Examination of product.

4.6.2.1 Examination of components. One hundred percent examination shall be performed for all drawing characteristics when the component lot size is not in excess of 1000 cartridges. For lot sizes in excess of 1000 cartridges, sampling inspection will be performed utilizing a plan acceptable to the procuring agency, in accordance with MIL-STD-105. Failure to comply with all drawing and specification requirements shall be cause for rejection.

4.6.2.2 Examination of assemblies. One hundred percent examination shall be performed to determine drawing compliance with all requirements of the assembly drawing and this specification when the assembly lot size is not in excess of 1000 cartridges. For lot sizes in excess of 1000, sampling inspection will be performed to determine drawing compliance utilizing a plan acceptable to the procuring agency in accordance with MIL-STD-105.

4.6.3 Conformance to drawings. Each cartridge shall be inspected for strict conformance to the engineering drawings, and to specifications and standards referenced therein. Failure to meet these criteria shall be cause for rejection.

4.6.4 X-Ray examination. Each cartridge of the preproduction test sample shall be subjected to X-Ray examination. X-ray photographs shall be identified by date, cartridge part numbers, lot number and serial numbers. These X-ray photographs shall be examined to determine compliance with the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

4.6.5 All fire sensitivity. Cartridge shall be tested according to Table II. Failure of any cartridge to fire, or failure to meet the ballistic requirements of this specification, shall be cause for rejection.

4.6.6 No fire sensitivity. Cartridges shall be tested according to Table II. The cartridge shall be held in a test jig. The direct current shall be 1 watt for a duration of five minutes. Firing of the cartridge shall be cause for rejection.

4.6.7 Sympathetic ignition. A 5 ampere current shall be applied to one cartridge and the other shall be sympathetically ignited. The minimum velocity for store "A" stated in the ballistic requirements of this specification do not apply to this test. Failure of the cartridge to achieve iginition shall be cause for rejection.

4.6.8 Electrical resistance. The resistance of the bridge wire shall be measured within an accuracy of 1 percent using a test circuit which subjects the bridge wire to a current of 0.9 $\pm$ 0.05 amperes. The cartridge shall be subjected to this test current for a period not to exceed 60 seconds. This test shall be conducted in accordance with MIL-STD-202, Method 303.

4.7 Environmental tests. During or after subjection to the environmental tests, as specified in the test, the cartridge shall be subjected to the functional tests. Failure to satisfy the requirements of the functional tests shall be considered as failure to pass the environmental tests and cause for rejection.

4.7.1 Static discharge. Twelve (12) cartridges shall be tested to the static discharge test and shall not fire when subjected to an electrostatic discharge of 150,000 ergs from a 500 picofarad capacitor.

4.7.2 Stray voltage. Each of forty-two (42) cartridges shall be subjected to 2000 pulses of direct current. Each pulse shall be 100 milliamperes. Duration of pulse shall be 300 milliseconds and pulse recurrent rate shall be 2.0 pulses per second.

4.7.3 Vibration. Forty-two (42) cartridges shall be subjected to vibration tests prescribed in MIL-STD-810, Method 514, Procedure 1, except that Figure I and Table III of this document apply in lieu of Figure I and Table I in MIL-STD-810. Equal quantities shall be vibrated at -54°C (-65°F), room temperature and +163°C (+325°F) after one hour soak time. Times shown in Table III refer to one axis of vibration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

RANGE CURVE FOR VIBRATION TEST

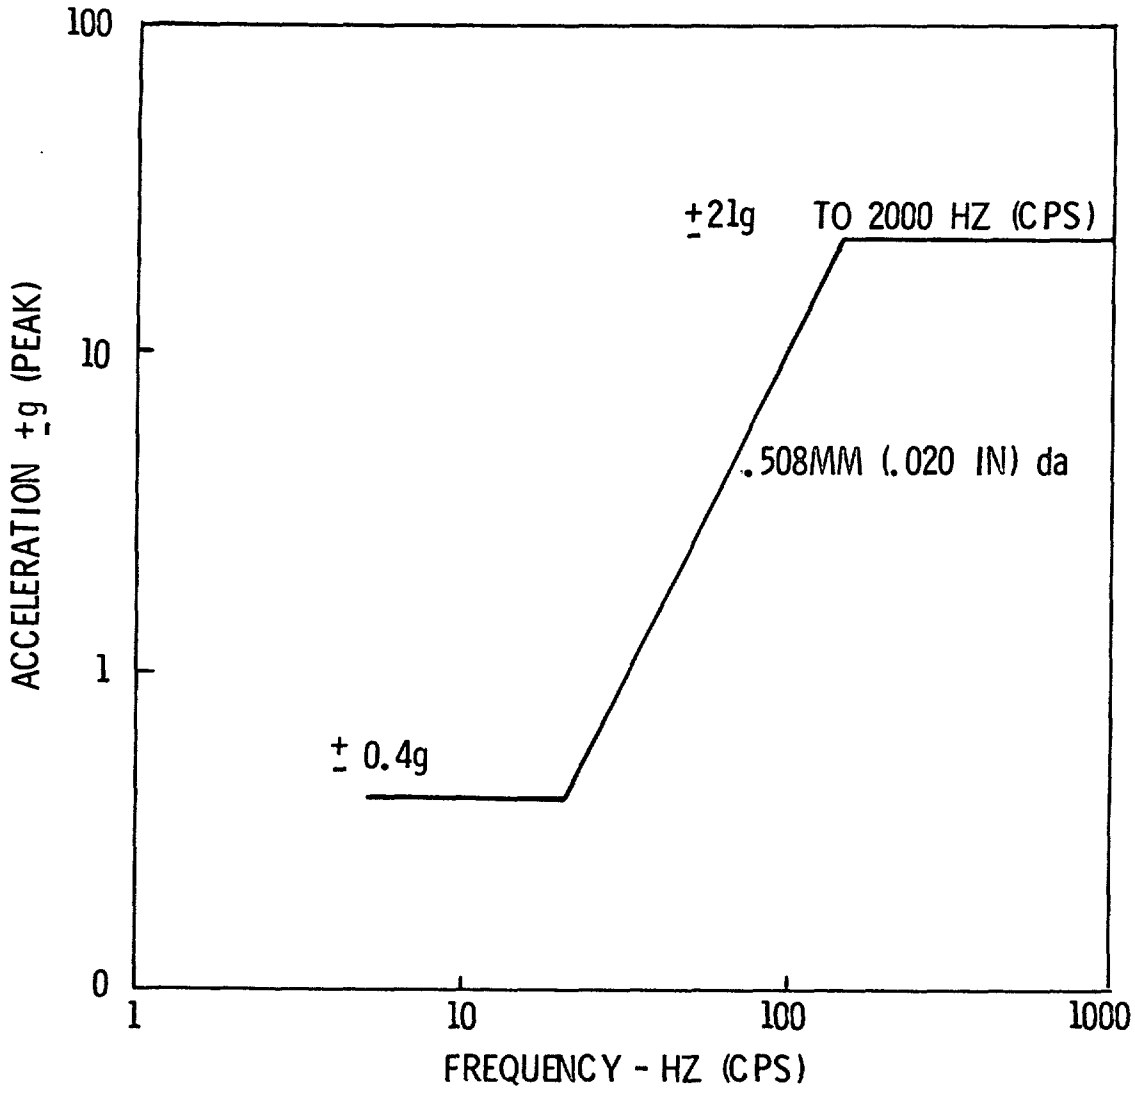


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

TABLE III

VIBRATION TEST SCHEDULE

NUMBER OF RESOURCES	TOTAL TIME AT RESOURCE	TOTAL CYCLE TIME
0		60 minutes
1	10 minutes	50 minutes
2	20 minutes	40 minutes
3	30 minutes	30 minutes
4	40 minutes	20 minutes

After the vibration test the 42 cartridges shall be x-rayed and checked for electrical resistance and ballistically tested. Evidence of any disintegration of the ignition element, igniter or propellant or derangement of any component or failure to meet the electrical resistance requirements of ballistics performance shall be cause for rejection of the lot.

4.7.4 Airtightness. One hundred and ninety-two (192) cartridges shall be tested in accordance with Table I and shall not exhibit a leak rate of greater than 1×10^{-4} cc/sec when subjected to a dry leak test at a pressure differential of .98kg/cm^2 (14 psi). Tests shall be conducted using a dry gas leak detection of sufficient sensivity to ascertain if the cartridge meets the leak rate requirements.

4.7.5 High temperature operation. Sixty-two (62) cartridges shall be conditioned at a temperature of 163°C (325°F) for at least four hours. Cartridges shall be fired within three minutes after removed from the temperature chamber.

4.7.6 Low temperature. Fifty (50) cartridges shall be conditioned to, and maintained at a temperature of -54°C (-65°F) for at least four hours. Cartridges shall be fired within three minutes after removed from the temperature chamber.

4.7.7 Temperature shock. Forty-two (42) cartridges shall first be placed within a test chamber wherein a temperature of 163°C (325°F) is maintained. The cartridges shall be exposed to this temperature for a period of four (4) hours, at the conculsion of which, and within five (5) minutes, the equipment shall be transferred to a chamber having an internal temperature of -40°C (-40°F). The equipment shall be subjected to this temperature for a period of four (4) hours. This constitutes one (1) cycle. The number of complete cycles shall be three (3). The duration

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

of exposure at each extreme temperature shall not be less than that specified and may be extended to overnight exposure to prevent interruption of the transfer sequence. At the conclusion of the third cycle, the cartridges shall be removed from the test chamber, conditions, and tested according to Table I.

4.7.8 Acceleration. Forty-two (42) cartridges shall be subjected to tests in accordance with Method 513, Procedure I of MIL-STD-810, except that the cartridge shall be capable of withstanding a sustained acceleration of 50g for at least one minute.

4.7.9 Acoustic noise. Forty-two (42) cartridges shall be subjected to tests in accordance with Method 515, Procedure I of MIL-STD-810, except for the using of an overall level of 160 db for the test level of Table II.

4.7.10 Impact shock. Forty-two (42) cartridges shall be dropped from a height of eight feet onto a steel plate supported by concrete. Fourteen (14) cartridges shall impact nose down, fourteen (14) nose up, and fourteen (14) horizontally. Firing of a cartridge during this test shall be cause for rejection.

4.7.11 Temperature conditioning. Ballistic firings will be conducted in accordance with Table II. Cartridges shall be soaked at the designated temperature for at least four hours. Cartridges shall be fired within three minutes after removed from the temperature chamber.

4.7.12 Temperature and humidity cycling. Eighteen (18) cartridges shall be tested in accordance with 3.4.5, MIL-D-81303. At the conclusion of the test the cartridges must meet the functional requirements of this specification and be free from visible damage.

4.8 Test procedures shall be in accordance with MIL-T-7743.

4.8.1 Instrumentation. The instrumentation used to measure the current flow is to have an accuracy of ±1 percent. When a rectified current is used the root mean square ripple content shall not exceed 5 percent of the test current and the rise time of the pulse shall not exceed 50 microseconds with a maximum overshoot of 5 percent.

4.8.2 Electrical resistance. The resistance of the bridge wire shall be measured within an accuracy of 1 percent using a test circuit which subjects the bridge wire to a current of 0.9 ± 0.05 amperes. The cartridge shall be subjected to this test current for a period not to exceed 60 seconds. The this set shall be conducted in accordance with MIL-STD-202, Method 303.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. For all levels of shipment, Levels A, B, and C cartridges shall be packaged as specified by the procuring activity.

5.2 Data cards. Data card information shall be as specified in MIL-STD-1167.

5.3 Marking. Exterior containers shall be marked in accordance with MIL-STD-129. The nomenclature shall be:

CARTRIDGE, BOMB EJECTION CCU-1/B

5.3.1 Additional marking (explosive). In addition to marking in accordance with MIL-STD-129, the exterior containers shall be marked in accordance with Code of Federal Regulations 49CFR 100-199. The following specific warning shall appear on the exterior container: "SMALL ARMS AMMUNITION, Handle With Care."

6. NOTES

6.1 Intended use. The Cartridge, Bomb Ejection CCU-1/B, is intended for use in the MAU-12A/A, MAU-12B/A, BRU-2/A and BRU-4/A Bomb Ejector Racks or in similar applications where a source of high pressure gas generation is required.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Conditions under which Government loaned property will be made available to the contractor.

c. Whether preproduction tests will be conducted by the procurement activity.

6.2.1 Preproduction samples. It is expected that the contract or purchase order will specify that 192 cartridges, representative of the production cartridges will be submitted to the contractor or designated laboratory for test and evaluation. The invitation for bids, and the contract or purchase order, should specify the point of delivery for these items.

6.3 Production delivery. No production items should be delivered prior to approval of the preproduction samples.

6.4 Definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

a. Preproduction tests. Preproduction tests are those tests performed prior to production on representative samples of the production equipment to demonstrate that the equipment meets the requirements of this specification.

b. Acceptance tests. Acceptance tests are those tests accomplished on representative samples of equipment submitted for acceptance under a contract to determine conformance to the requirements of this specification, and to determine that the equipment is equivalent in performance and construction to the approved preproduction samples.

Custodian
Air Force - 99

Preparing activity
Air Force - 99

Project No. 1377F600

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:37Z
Check the source to verify that this is the current version before use.