MIL-T-38984(USAF)
Amendment 4
16 October 1978
Supersedes Amendment 3
Dated 10 January 1978

MILITARY SPECIFICATION
TEST SET, BOMB PRACTICE TTU-300/E

This amendment forms a part of Military Specification MIL-T-38984(USAF), dated 6 July 1970, and is mandatory for use by the USAF.

Page 5. Paragraph 4.5.4.5. Delete and substitute: "4.5.4.5. Vibration Test. Mount unit to vibration exciter with straps. Cycle from 10 CPS to 200 CPS at 1.5G limit at a rate of 12 minutes per sweep (10-200-10). Sweep four times in each of 3 mutually perpendicular plane. Operate unit upon completion of each plane.

Page 5. Add new paragraph.

"4.5.4.6. Reliability Test. The test set shall be subjected to a reliability test consisting of performance of the functional test 350 times. Each performance of the functional test shall be considered one cycle. Conditions of this test shall be:

a. Temperature - 25°C ± 5°C.

b. Altitude - 0 to 5000 feet above mean sea level.

c. Humidity - 90 percent or less.

d. DC voltage 20 ± 3.

Failure of any type prior to 175 cycles shall be cause for rejection. Failure after 175 cycles and before 350 cycles requiring adjustment by means other than nominal controls shall be cause for rejection."

Page 6, Table I. Delete, and substitute the attached Table I.

Page 7, Figure 1. Delete, and substitute the attached Figure 1.

Custodian
Air Force - 15

Preparing Activity
Air Force - 15

Project No. 1190-F004

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:38Z
Check the source to verify that this is the current version before use.

TABLE I

Calibration and Functional Test Procedures for the Test Set, Bomb, Practice TTU-300/E. Each Test Set will be calibrated prior to accomplishments of the Individual Tests.

Equipment required:

a. Dual Channel Counter Timer

b. A BDU-38/B Battery Pack, Forward (69D13056-3) and AFT (69D14387-3) Cables.

c. Multimeter

A. Calibration Procedures

Before starting, run continuity test, using Figure 1.

1. Remove panel from mounting in box.

2. Connect Battery Pack to Tester P3 using fwd cable; switch in cable ON. (Wire pulled out.)

3. Meter should read 20 V; if reading is low, plug power cord into 110 V, 60 HZ supply for one hour.

4. Set counter to time interval function, connect start channel to test point 5 and stop channel to the arm of S1. (Set start channel on positive slope and stop channel to negative slope.)

5. Set time select switch (S1) to 220 milliseconds.

6. Turn "ON - OFF" Switch to "ON." Set counter trigger and timing circuits to read time - (220 msec, 550 msec or 1500 msec as appropriate).

7. Repeat Steps 5 and 6 for 550 and 1500 Position of S1. Readings should be 225 ± 20 MS, 555 ± 25 MS and 1525 ± 50 MS. Out of Tolerance Timing modules will be replaced.

B. Functional Test Procedures

1. Connect Battery Pack to Tester P3 Connector using fwd cable. Connect Aft Cable to J3 and J1 of the Tester. Energize switches in both Cables but leave Tester Switch Off.

2. Meter should read 20V; if reading is low, connect Power Cord to 110V, 60 HZ supply for one hour.

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:38Z
Check the source to verify that this is the currentversion before use.

TABLE I (Cont'd)

3. Set Battery Pack Timer Switch and the Tester Timer Switch to similar positions.

4. Turn "ON-OFF" switch to "ON." REF light should light just before or together with the DELAY Light.

5. Repeat Steps 3 and 4 for the other timing positions.

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:38Z
Check the source to verify that this is the currenversion before use.

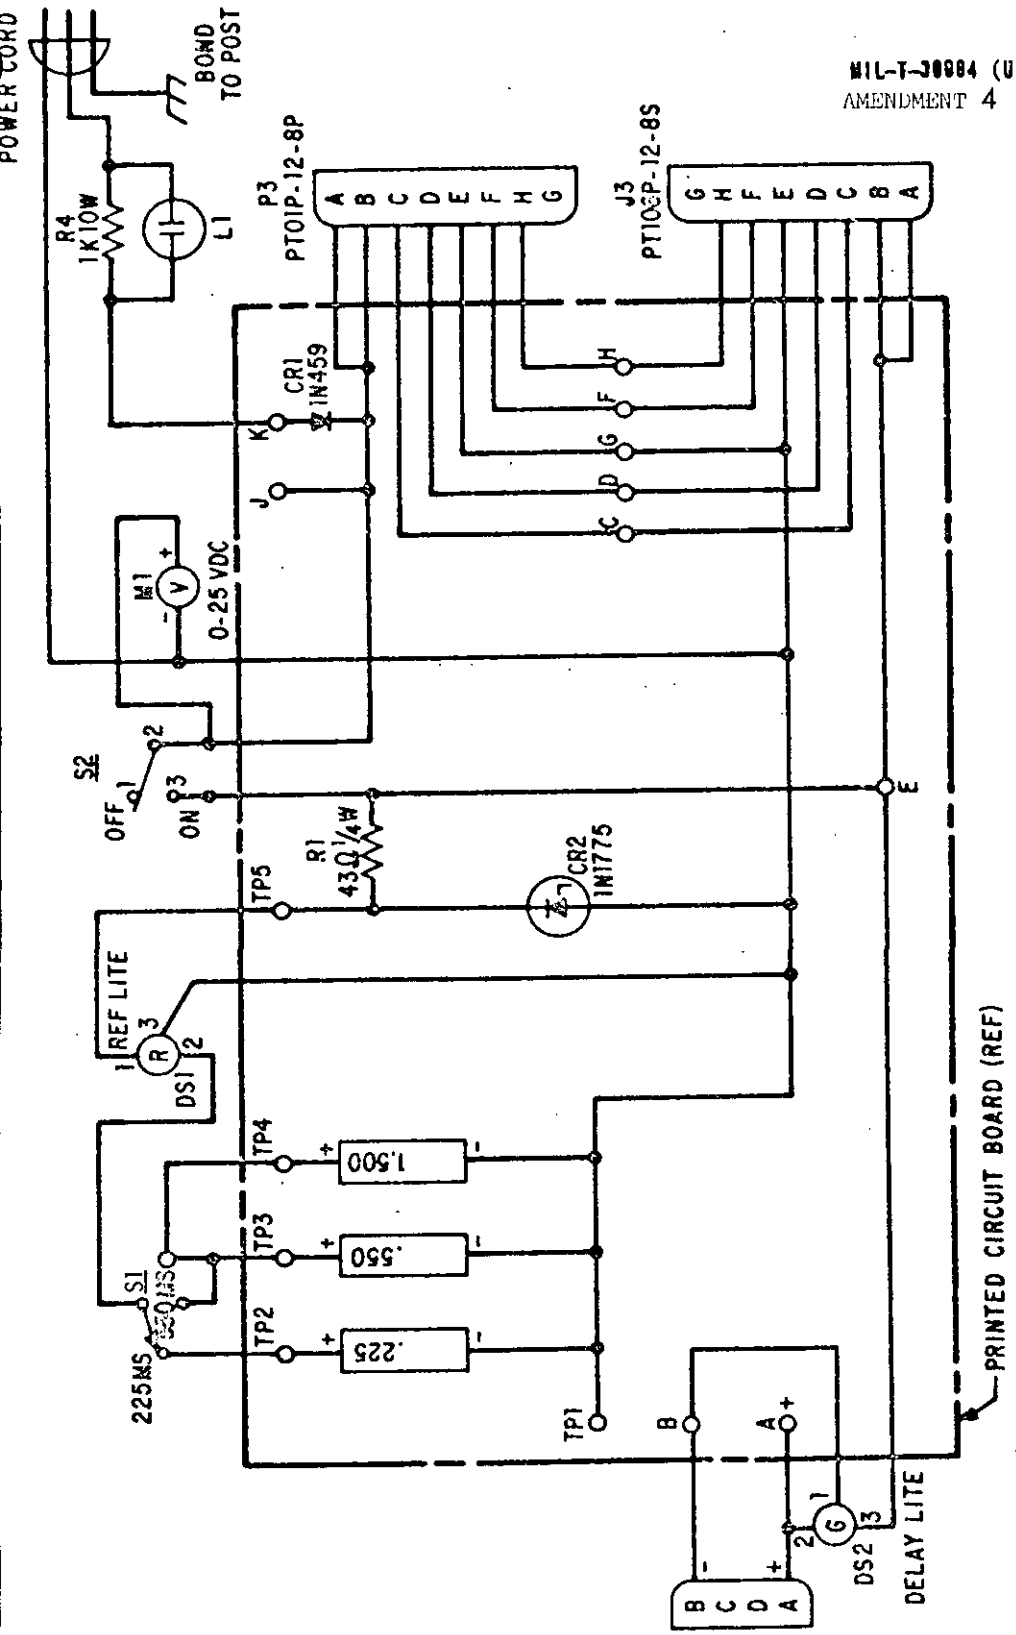


FIGURE 1. TEST SET, ECMB, PRACTICE TTU-300/E SCHEMATIC DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 20260-21T15:38Z
Check the source to verify that this is the current version before use.