
MILITARY SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, MINIATURE, RECTANGULAR TYPE, STRAIN RELIEF, STRAIGHT

This specification is approved for use by Engineering and Technical Support Division, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the strain relief described herein shall consist of this document and the latest issue of Specification MIL-C-83733(USAF).

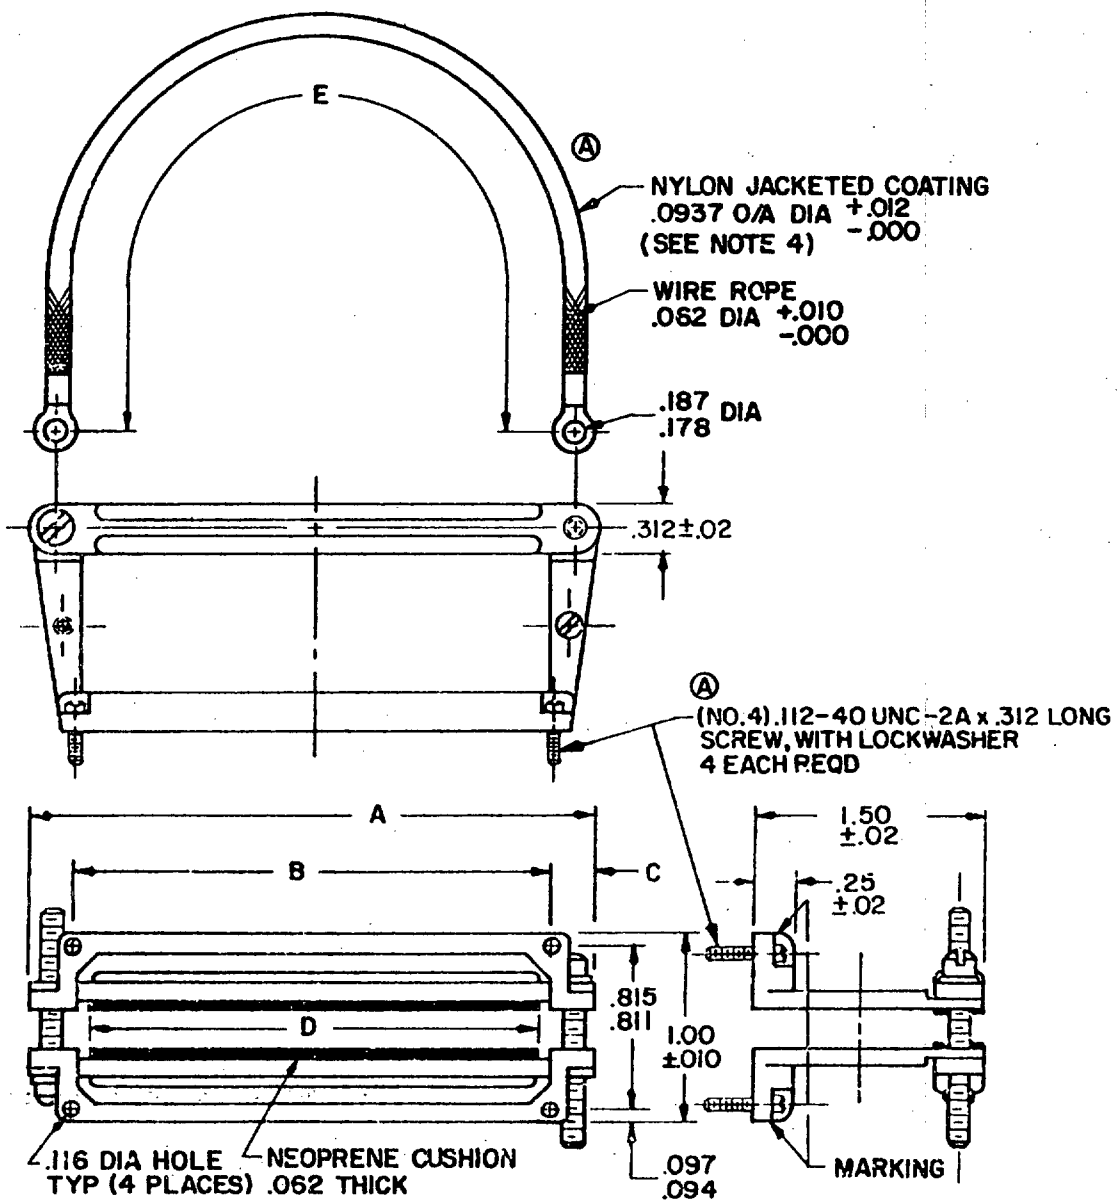

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:36Z
Check the source to verify that this is the current version before use.

Ⓐ

Part number	Dimensions						Lanyard
	Shell size	A ±.062 (1.57)	B ±.005 (.13)	C ±.032 (.81)	D ±.062 (1.57)	E ±.062 (1.57)	
M83733/16-1	A	2.437 (61.90)	1.895 (48.13)	.271 (6.88)	1.70 (43.18)		Without
M83733/16-2	B	3.750 (95.25)	3.195 (81.15)	.277 (7.04)	3.00 (76.20)		
M83733/16-3	A	2.437 (61.90)	1.895 (48.13)	.271 (6.88)	1.70 (43.18)	10.375 (263.53)	With
M83733/16-4	B	3.750 (95.25)	3.195 (81.15)	.277 (7.04)	3.00 (76.20)		

Ⓐ

INCHES	MM	INCHES	MM
.010	.25	.116	2.95
.012	.30	.178	4.52
.02	.51	.187	4.75
.062	1.57	.25	6.35
.0937	2.38	.312	7.92
.094	2.39	.811	20.60
.097	2.46	.815	20.70
.112	2.84	1.00	25.40
		1.50	38.10

NOTES:
1. Dimensions are in inches.
2. Material shall be aluminum alloy.
3. Screws shall be cadmium plated steel.
Ⓐ 4. Lanyard shall be flexible corrosion resistant/steel per MIL-W-83420, type 2, composition B. Connecting lugs shall be welded or securely attached mechanically to wire rope.
5. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
6. Metric equivalents are in parentheses.

Custodian:
Air Force - 85

Review activities:
Air Force - 80, 82, 11
DSA - ES

Preparing activity:
Air Force - 85

(Project 5935-F011-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:36Z
Check the source to verify that this is the current version before use.