

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, MOUNTING TRACK FOR

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-R-6106.

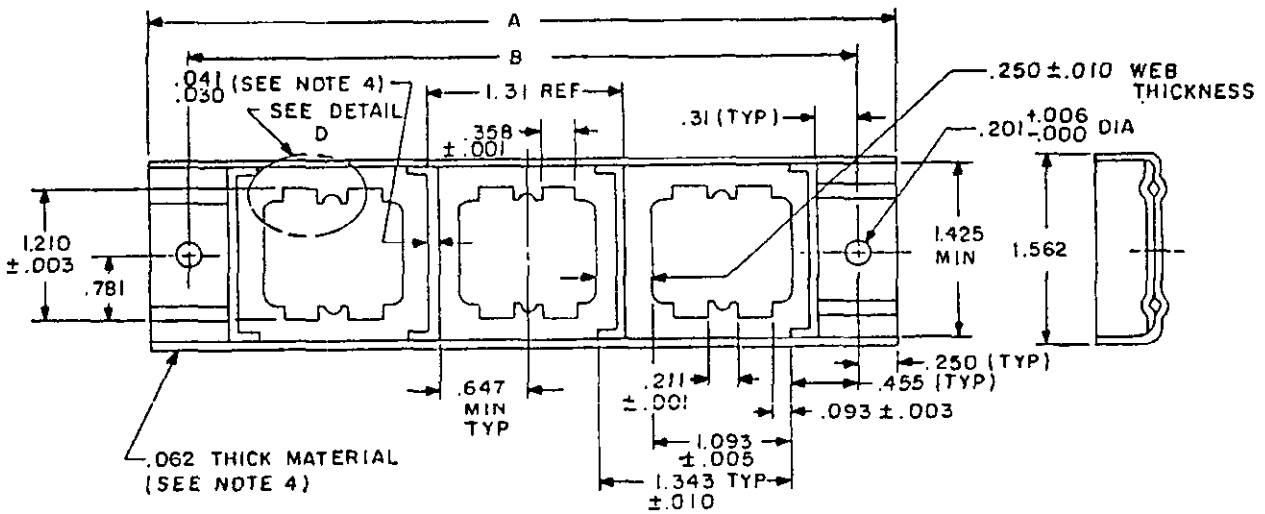

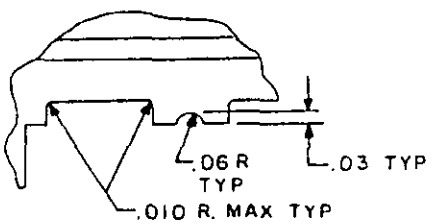

DETAIL D
APPLICABLE TO
EACH CUTOUT

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.201	5.10	.647	16.43
.005	0.13	.211	5.36	.781	19.84
.006	0.15	.250	6.35	1.031	26.19
.010	0.25	.31	7.9	1.093	27.76
.015	0.38	.358	9.09	1.210	30.73
.030	0.76	.455	11.56	1.31	33.3
.03	.8	.45	11.4	1.343	34.11
.06	1.5	.50	12.7	1.425	36.20
.062	1.57	.500	12.70	1.562	39.67

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Material shall be 302 stainless steel (annealed) or 304L stainless steel (annealed).

Ⓔ FIGURE 1. Outline configurations:

Ⓔ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 20261017T06:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Material: Cres type 302, QQ-S-766 or 304L stainless steel (annealed).

Finish: Shot peen, MIL-S-13165.

Plating: Sulfamate nickel per QQ-N-290 or equivalent. Thickness shall be 100 microinches minimum.

Part number: M6106/3- (dash number from table I).

TABLE I. Dash number and characteristics.

Dash number 1/	Number of track cutouts 2/	Dimensions 3/		Max weight (ounces)
		A	B	
001	1	2.50 (63.5)	2.000 (50.80)	1.78 (50.30 grams)
002	2	3.84 (97.54)	3.343 (84.91)	2.36 (66.91 grams)
003	3	5.19 (131.83)	4.687 (119.05)	3.2 (90.9 grams)
004	4	6.53 (165.86)	6.031 (153.19)	4.0 (113.6 grams)
005	5	7.87 (199.90)	7.375 (187.33)	4.18 (118.34 grams)
006	6	9.22 (234.19)	8.718 (221.44)	5.1 (144.6 grams)

1/ To be used in conjunction with MIL-R-6106/4 and MIL-R-6106/5.

2/ MIL-R-6106/35 shall be used to fill cutouts when socket module is not installed.

3/ Dimensions are in inches. Millimeters are in parentheses.

Custodian:
Air Force - 85

Review activity:
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5945-F661-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.