
MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 2PDT, BRACKET AND SOCKET ASSEMBLY FOR

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the relay bracket and socket assembly described herein shall consist of this specification and the latest issue of MIL-R-6106.

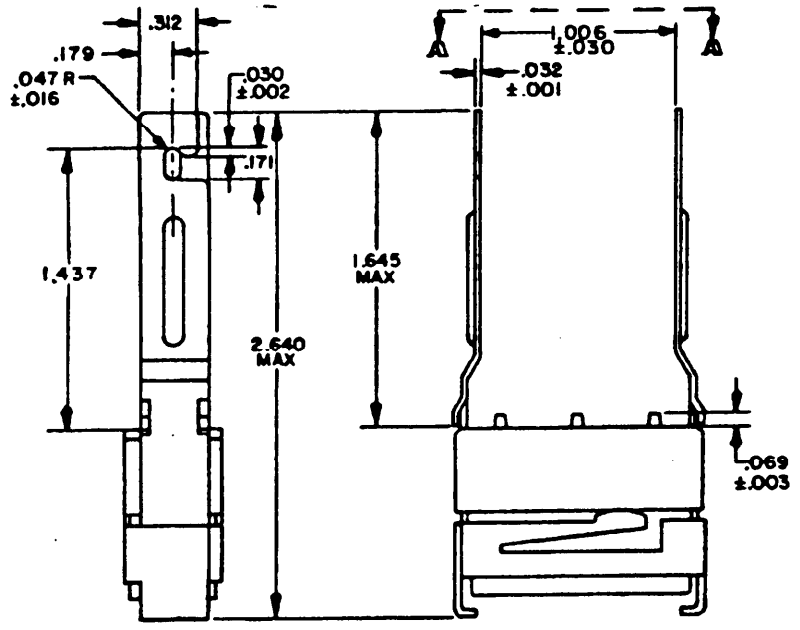

INCHES	MM	INCHES	MM
.001	0.03	.179	4.55
.002	0.05	.200	5.08
.003	0.08	.312	7.92
.005	0.13	.320	8.13
.016	0.41	.370	9.40
.030	0.76	.400	10.16
.031	0.79	.520	13.21
.032	0.81	.800	20.32
.047	1.19	1.006	25.55
.060	1.52	1.305	33.15
.062	1.57	1.437	36.50
.069	2.26	1.645	41.78
.171	4.34	2.640	67.06

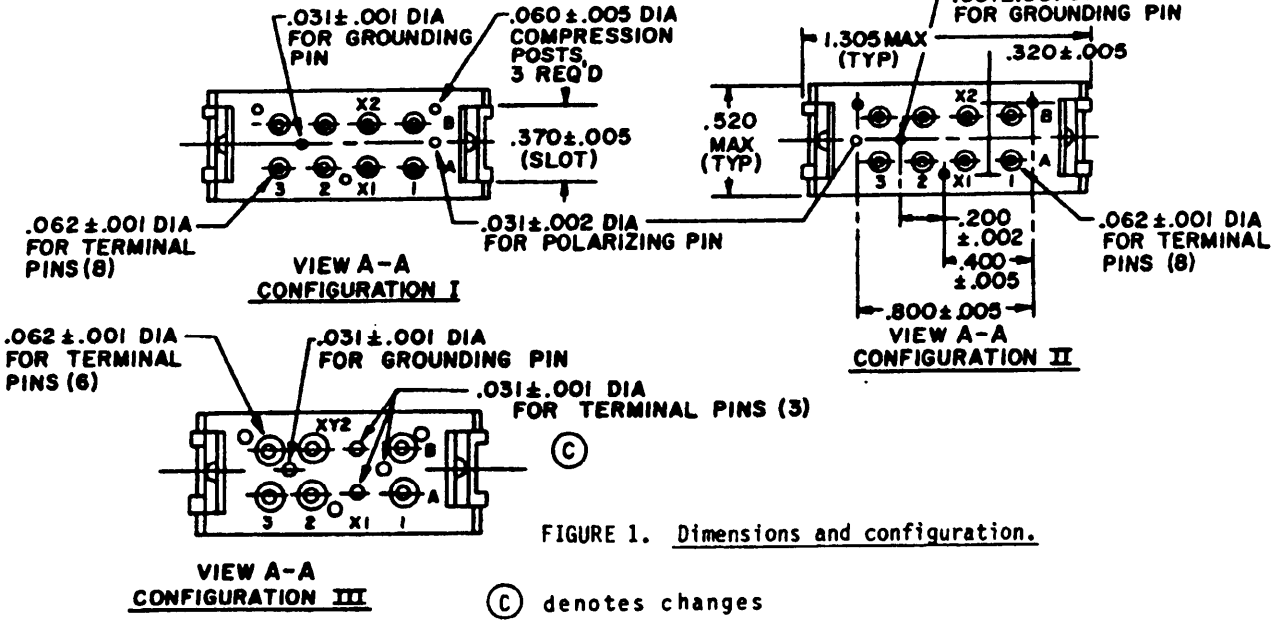


FIGURE 1. Dimensions and configuration.

© denotes changes

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 20261O-17T06:20Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm).
4. Terminal markings shall be of a contrasting color to the socket surface and shall appear on both the bottom and top surface per the applicable specification.
5. Minimum holding force: 3 lbs. when assembled to track (MIL-R-6106/3).
6. Color code, top surface of socket per table I.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Weight: .045 pound (20.41 grams) maximum.

Material:
Body - Torlon (polyanide-imide)
Bracket - 17-7 ph cres
Grommet - Silicone rubber

This bracket and socket assembly accepts contacts MS27491-16 and -22, series II A. Contacts will not be furnished with the socket module.

Part number: M6106/4- (dash number from table I).

TABLE I. Dash number, characteristics and color code.

Dash 1/ number	Socket configuration	Applicable relay	Color code per FED-STD-595
001	I AC	MIL-R-6106/1-002	Gray 36231
002	II DC	MIL-R-6106/1-001,003	Black 37038
003	III DC latch	MIL-R-6106/36-001	Brown 30252

1/ To be used in conjunction with the applicable relay and mounting track (MIL-R-6106/3).

© 2/ Each socket module delivered shall have a hole pattern that:
a. Permits installation of the mating relay into the socket module when the relative orientation of the two is correct.
b. Prevents installation of this mating relay into the socket module when the relative orientation of the two is not correct.
c. Prevents installation of all other relays into the socket module regardless of the relative orientation of the socket module and the relay.

© 3/ Any hole molded into the socket module that results in a pattern that is not consistent with 2/ shall be filled. The filling means shall:
a. If a non-metal, be proved to comply with the reversion resistance and hydrolytic stability requirements of MIL-STD-454, requirement 47.
b. Be restrained from motion relative to the module material into which it is inserted.
c. Have a hardness comparable to that of the module material into which it is inserted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5945-F571)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.