INCH-POUND

MIL-R-6106/4D(USAF)
14 May 1993
SUPERSEDING
MIL-R-6106/4C(USAF)
15 March 1985

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 2PDT, BRACKET AND SOCKET
ASSEMBLY FOR

This specification sheet is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-6106.


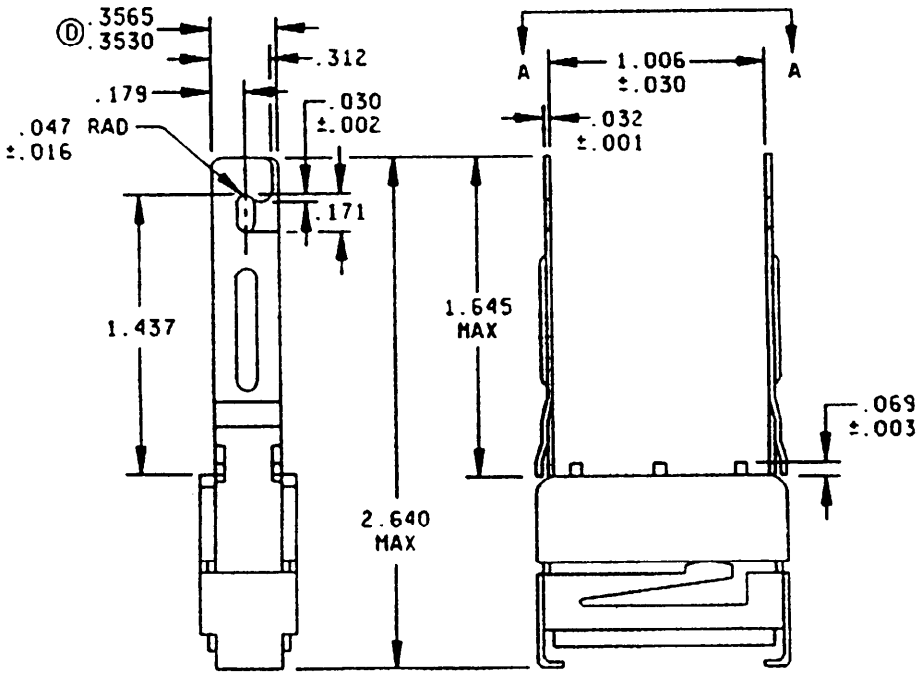


FIGURE 1. Dimensions and configurations.

Ⓓ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.

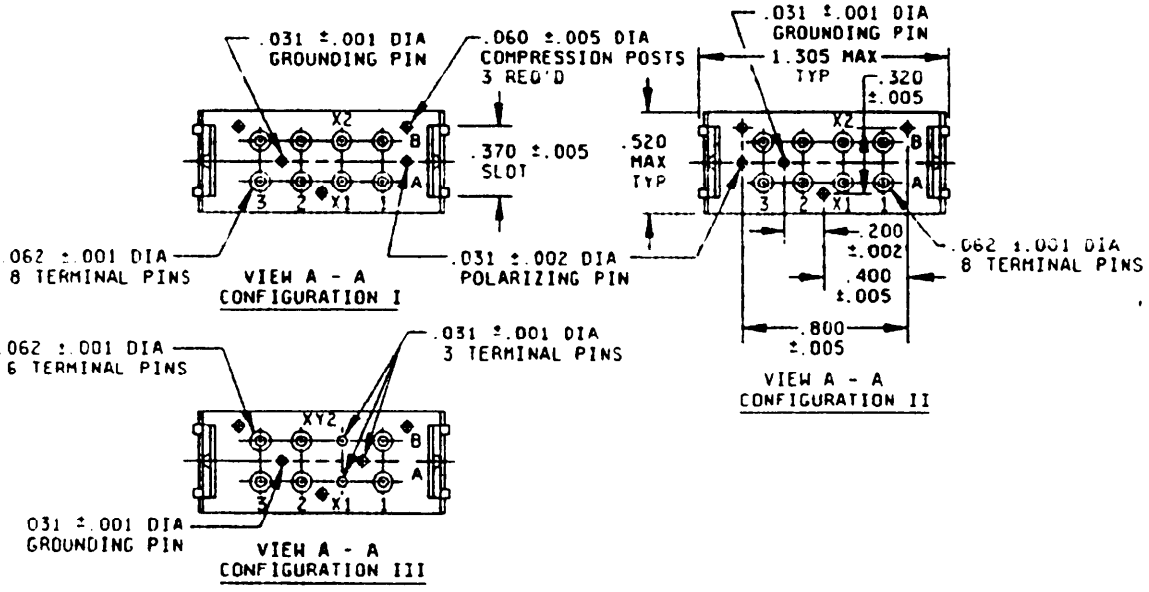

Inches	mm	Inches	mm
.001	0.03	.179	4.55
.002	0.05	.200	5.08
.003	0.08	.312	7.92
.005	0.13	.320	8.13
.016	0.41	.370	9.40
.030	0.76	.400	10.16
.031	0.79	.520	13.21
.032	0.81	.800	20.32
.047	1.19	1.006	25.55
.060	1.52	1.305	33.15
.062	1.57	1.437	36.50
.069	2.26	1.645	41.78
.171	4.34	2.640	67.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Terminal markings shall be of a contrasting color to the socket surface and shall appear on both the bottom and top surface in accordance with the applicable specification.
5. Minimum holding force: Three pounds when assembled to track (MIL-R-6106/3).
6. Color code top surface of socket in accordance with table I.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Weight: .045 pound (20.41 grams) maximum.

Material:
Body: Torlon poly(amide-imide)
Bracket: 17-7 ph cres
Grommet: Silicone rubber

This bracket and socket assembly accepts contacts MS27491-16 and -22, series II A. Contacts will not be furnished with the socket module.

Part or Identifying Number (PIN): M6106/4- (plus dash number from table I).

TABLE I. Dash number, characteristics, and color code. 1/ 2/

PIN M6106/4- 3/	Socket configuration	Applicable relay	Color code per FED-STD-595
001	I AC	MIL-R-6106/1-002	Gray 36231
002	II DC	MIL-R-6106/1-001, 003	Black 37038
003	III DC latch	MIL-R-6106/36-001	Brown 30252

1/ Each socket module shall have a hole pattern that:

a. Permits installation of the mating relay into the socket module when the relative orientation of the two is correct.

b. Prevents installation of this mating relay into the socket module when the relative orientation of the two is not correct.

c. Prevents installation of all other relays into the socket module regardless of the relative orientation of the socket module and the relay.

2/ Any hole molded into the socket module that results in a pattern that is not consistent with 1/ shall be filled. The filling means shall:

a. If a nonmetal, be proven to comply with the reversion resistance and hydrolytic stability requirements of MIL-STD-454, requirement 47.

b. Be restrained from motion relative to the module material into which it is inserted.

c. Have a hardness comparable to that of the module material into which it is inserted.

3/ To be used in conjunction with the applicable relay and mounting track (MIL-R-6106/3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5945-F739-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.