
MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, BRACKET AND SOCKET ASSEMBLIES FOR

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Directorate of Electronic Support (AFALD/PTS), Wright-Patterson AFB, Ohio 45433, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the relay bracket and socket assemblies described herein shall consist of this document and the latest issue of Specification MIL-R-6106.

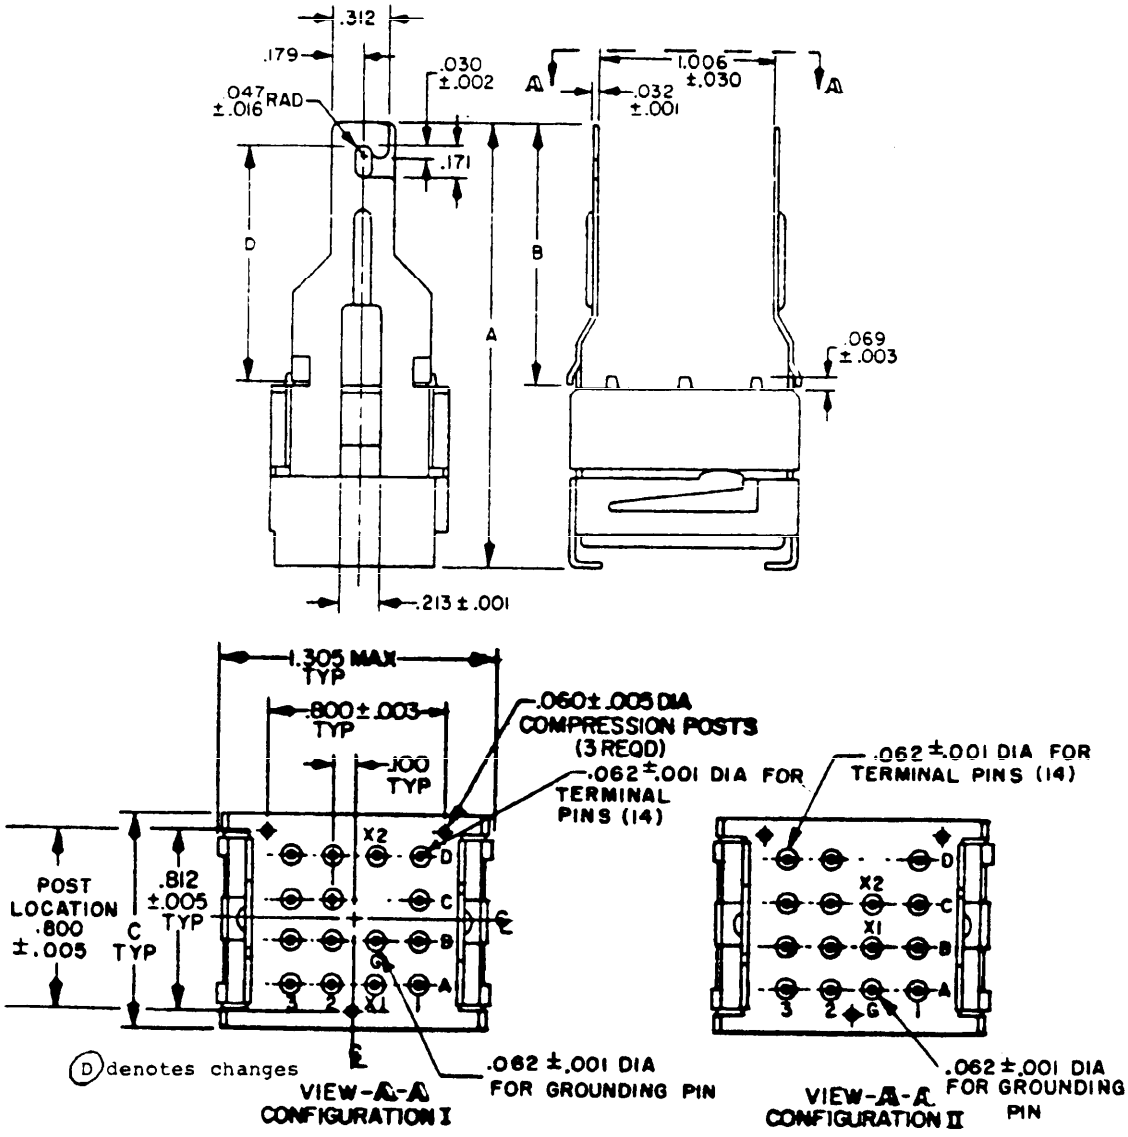

(D) FIGURE 1. Dimensions and configurations.

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 202610-17T06:20Z
Check the source to verify that this is the current version before use.

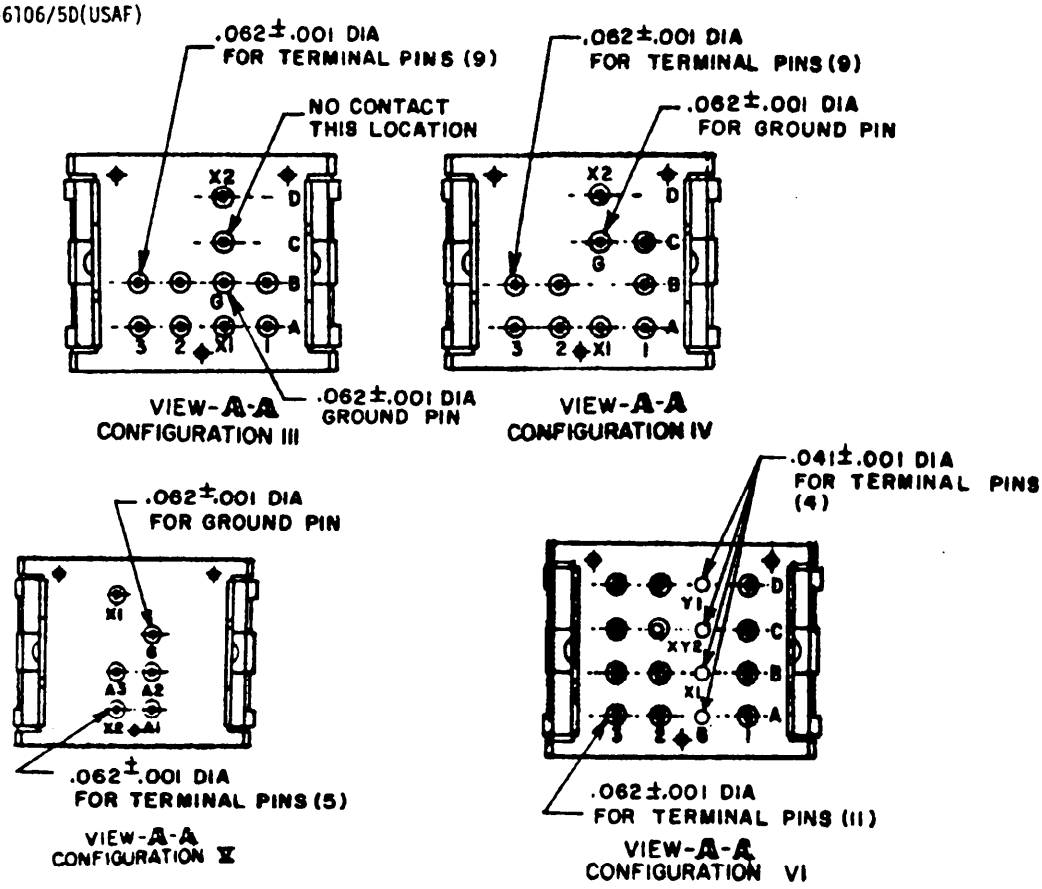

Configuration	Dimensions			
	A Max	B Max	C Max	D Max
I	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (33.68)
II	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (33.68)
III	3.320 (84.33)	2.240 (56.90)	1.020 (25.91)	2.123 (53.92)
IV	3.320 (84.33)	2.240 (56.90)	1.020 (25.91)	2.123 (53.92)
V	3.320 (84.33)	2.240 (56.90)	1.020 (25.91)	2.123 (53.92)
VI	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (35.68)

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.030	.76	.100	2.54	.312	7.92
.002	.05	.032	.81	.171	4.34	.800	20.32
.003	.08	.041	1.04	.179	4.55	.812	20.62
.005	.13	.047	1.19	.213	5.41	1.305	33.15
.016	.41	.060	1.52				
		.062	1.57				
		.069	1.75				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm).
4. Terminal markings shall be of a contrasting color to the socket surface and shall appear on both the bottom and top surface per the applicable specification.
5. Minimum holding force: 3 lbs. when assembled to track (MIL-R-6106/3).
6. Color code, top surface fo socket per table I.

Ⓓ FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Material:
(D) Body - Torlon (Polyanide-Imide).
Bracket - 17-7 ph cres.
Grommet - Silicone rubber

(D) This bracket/socket assembly accepts contacts MS27491-16 and 20, series IIA as specified. Contacts will not be furnished with the socket module.

Part number: M6106/5- (dash number from table I).

(D) TABLE I. Dash number and characteristics.

Dash number 1/	Socket configuration	Applicable relay	Maximum weight (pounds)	Color code FED-STD-595
001	I (dc)	MIL-R-6106/2-001, -003	.045 (20.41 grams)	Black 37038
002	II (ac)	MIL-R-6106/2-002	.045 (20.41 grams)	Gray 36231
003	III (td-op)	MIL-R-83726/19	.081 (36.70 grams)	Blue 35240
004	IV (td-rel)	MIL-R-83726/18	.081 (36.70 grams)	Green 34449
005	V (td voltage sensing)	MIL-R-83726/27	.115 (52.10 grams)	Orange 32246
006	VI (dc latching)	MIL-R-83726/37-001	.045 (20.41 grams)	Brown 30252

1/ To be used in conjunction with relay mounting track MIL-R-6106/3 and applicable relay.

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5945-F381-24)

Source: https://assist.dla.mil -- Downloaded: 202610-17T06:20Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:20Z
Check the source to verify that this is the current version before use.