[INCH−POUND]
A−A−55563/30C
15 August 2026
SUPERSEDING
A−A−55563/30B
30 May 2021

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, CENTER MOUNTING, WITH MULTIPLE MOUNTING HOLES, UNSUPPORTED, FOR CHASSIS OR SUPPORTED MOUNTING APPLICATIONS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A−A−55563.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA55563	/30	@	U	XX	&
CID number	Applicable CID specification sheet	Material	Configuration	Overall length	Finish

Example: AA55563/30GU50H is the PIN for a phosphor bronze, 5.0 inches (127 mm) long, silver plated, five mounting hole card guide for use with heat sinks.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see figure 1).

Material type. Material types shall be defined in A−A−55563. The applicable material type designators for this CID specification sheet are "A" (beryllium copper, temper TD01), "F" (stainless steel, full hard), or "G" (phosphor bronze).

Material thickness. The beryllium copper, phosphor bronze, or stainless steel thickness shall be .009 ±.002 inch (0.23 ±0.05 mm).


Configuration. The card holder is designed for use in applications where the card holder is supported underneath, such as mounting in a chassis or on a motherboard. The designator "U" shall be included in the PIN.

Overall length. Overall length is shown on figure 1 as dimension "L" and is displayed in table I herein. Applicable overall length designator "10", "15", "20", "25", "30", "35", "40", "45", "50", "55", "60", "65", "70", "75", "80", "85", "90", "95", "A0", or "A5" shall be included in the PIN.

Finish. Finish types shall be defined in A−A−55563. Finish designator "K" (no finish) is the only finish available for material type designators "A" and "G". Finish designator "G" (passivate) is the only finish available for material type designator "F".

Mounting hole spacing. Mounting hole spacing is shown on figure 1. The number of holes in the card holder is calculated by multiplying the length in inches by two.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

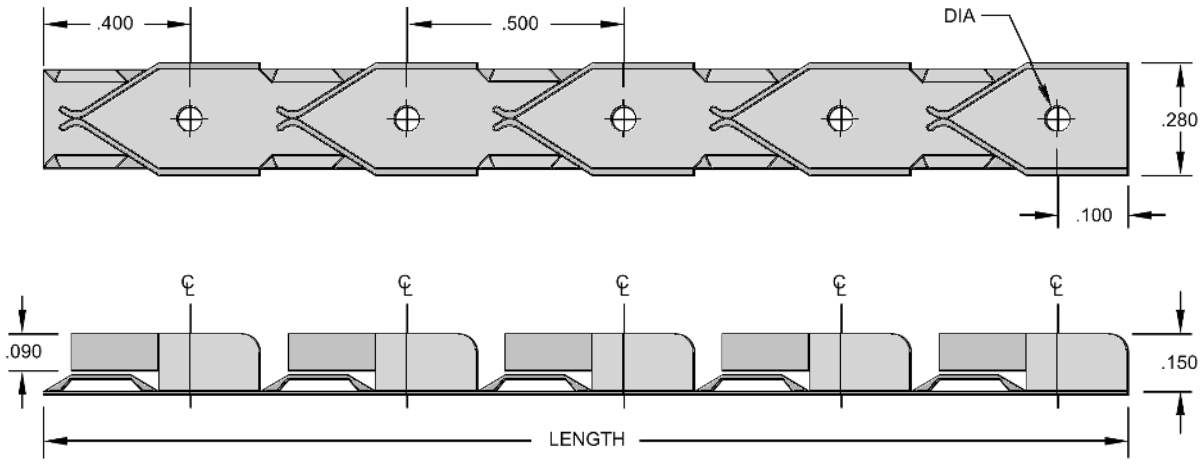

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.100	2.54	.150	3.81	.400	10.16
.090	2.29	.110	2.79	.280	7.11	.500	12.7

NOTES:
1. Dimensions are in inches. Millimeters are given for information only.
2. Unless otherwise specified, tolerances are ±.01 inch (0.25 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
3. Card holder configuration shown is a 2.5 inch (64 mm) version with 5 mounting holes.

FIGURE 1. Card holder design and dimensions.

TABLE I. Length and hole spacing. 1/ 2/

PIN designator for overall length	Dimension "L" ±.020 (0.51)	PIN designator for overall length	Dimension "L" ±.020 (0.51)
10	1.0 (25)	60	6.0 (152)
15	1.5 (38)	65	6.5 (165)
20	2.0 (51)	70	7.0 (178)
25	2.5 (64)	75	7.5 (191)
30	3.0 (76)	80	8.0 (203)
35	3.5 (89)	85	8.5 (216)
40	4.0 (102)	90	9.0 (229)
45	4.5 (114)	95	9.5 (241)
50	5.0 (127)	A0	10.0 (254)
55	5.5 (140)	A5	10.5 (267)

1/ Millimeters, in parenthesis, are given for information only.
2/ Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A-A-55563 - Holders, Electrical Card, Metal Card Guide, General Requirements for

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
07556	Unitrack Industries, Inc. 967 E. Masten Circle Milford, DE 19963-1085	Telephone: (302) 424-5050 Electronic mail: unitrack@unitrack.com URL: https://www.unitrack.com

Part number supersession data. This CID specification sheet supersedes the following manufacturer's part numbers as shown. The information in table II is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. Commercial part number supersession data.

CID PIN; AA55563/30@UXX& 1/				Manufacturers 2/	
Material type	Configuration	Overall length designator	Finish	CAGE 07556	
A	U	10	K	BC1000-1	
A	U	15	K	BC1000-1.5	
A	U	20	K	BC1000-2	
A	U	25	K	BC1000-2.5	
A	U	30	K	BC1000-3	
A	U	35	K	BC1000-3.5	
A	U	40	K	BC1000-4	
A	U	45	K	BC1000-4.5	
A	U	50	K	BC1000-5	
A	U	55	K	BC1000-5.5	
A	U	60	K	BC1000-6	
A	U	65	K	BC1000-6.5	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE II. Commercial part number supersession data – Continued.

CID PIN; AA55563/30@UXX& 1/				Manufacturers 2/	
Material type	Configuration	Overall length designator	Finish	CAGE 07556	
A	U	70	K	BC1000-7	
A	U	75	K	BC1000-7.5	
A	U	80	K	BC1000-8	
A	U	85	K	BC1000-8.5	
A	U	90	K	BC1000-9	
A	U	95	K	BC1000-9.5	
A	U	A0	K	BC1000-10	
A	U	A5	K	BC1000-10.5	
F	U	10	G	SS1000-1	
F	U	15	G	SS1000-1.5	
F	U	20	G	SS1000-2	
F	U	25	G	SS1000-2.5	
F	U	30	G	SS1000-3	
F	U	35	G	SS1000-3.5	
F	U	40	G	SS1000-4	
F	U	45	G	SS1000-4.5	
F	U	50	G	SS1000-5	
F	U	55	G	SS1000-5.5	
F	U	60	G	SS1000-6	
F	U	65	G	SS1000-6.5	
F	U	70	G	SS1000-7	
F	U	75	G	SS1000-7.5	
F	U	80	G	SS1000-8	
F	U	85	G	SS1000-8.5	
F	U	90	G	SS1000-9	
F	U	95	G	SS1000-9.5	
F	U	A0	G	SS1000-10	
F	U	A5	G	SS1000-10.5	
G	U	10	K	PB1000-1	
G	U	15	K	PB1000-1.5	
G	U	20	K	PB1000-2	
G	U	25	K	PB1000-2.5	
G	U	30	K	PB1000-3	
G	U	35	K	PB1000-3.5	
G	U	40	K	PB1000-4	
G	U	45	K	PB1000-4.5	
G	U	50	K	PB1000-5	
G	U	55	K	PB1000-5.5	
G	U	60	K	PB1000-6	
G	U	65	K	PB1000-6.5	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE II. Commercial part number supersession data – Continued.

CID PIN; AA55563/30@UXX& 1/				Manufacturers 2/	
Material type	Configuration	Overall length designator	Finish	CAGE 07556	
G	U	70	K	PB1000-7	
G	U	75	K	PB1000-7.5	
G	U	80	K	PB1000-8	
G	U	85	K	PB1000-8.5	
G	U	90	K	PB1000-9	
G	U	95	K	PB1000-9.5	
G	U	A0	K	PB1000-10	
G	U	A5	K	PB1000-10.5	

1/ See PIN for symbol representation.
2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of A-A-55563.

Guidance on use of alternative parts with less hazardous or non–hazardous materials. This CID specification sheet provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

National stock number (NSN). The following is a list of identified NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with this CID (see table IV).

TABLE IV. NSN to CID PIN cross-reference.

NSN	CID PIN
5998-01-072-1295	AA55563/30 AU25K
5998-01-092-9657	AA55563/30 AU30K
5998-01-134-7632	AA55563/30 AU40K
5998-01-134-7633	AA55563/30 AU45K
5998-01-481-3663	AA55563/30 AU50K
5998-01-012-8157	AA55563/30 AU55K
5998-01-216-2381	AA55563/30 AU70K
5998-01-232-4003	AA55563/30 FU25G
5998-01-107-2083	AA55563/30 FU30G
5998-01-097-0523	AA55563/30 FU50G
5998-01-318-6675	AA55563/30 GU50K
5998-01-257-4064	AA55563/30 GU50K

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

CONCLUDING MATERIAL

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force − 85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing Activity

DLA − CC

Project: 5998−2026−030

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.